

A950RG Repeater Settings

Contents


- [1 A950RG Repeater Settings](#)
- [2 Diagram](#)
- [3 Set up steps](#)
 - [3.1 DOWNLOAD](#)
- [4 Related Posts](#)

A950RG Repeater Settings

It is suitable for: **A800R, A810R, A3100R, T10, A950RG, A3000RU**

Application introduction: Repeater Mode, you can extend the superior Wi-Fi signal by Repeater setting function under the Wireless column to increase the coverage of the wireless signal.

Diagram

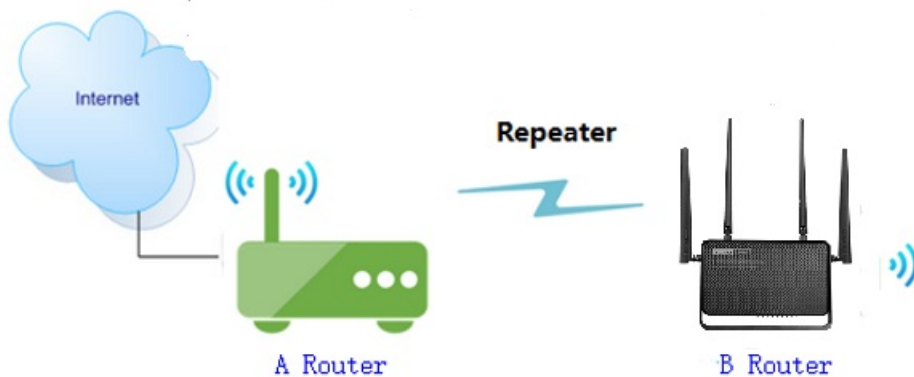

Preparation

- Before configuration, make sure that both A Router and B Router are powered on.
- make sure you know the SSID and password for A router
- 2.4G and 5G, you can only choose one for Repeater
- move the B router closer to the A router to find the B routing signals better for fast repeater.

Set up steps

STEP-1 B-Router Wireless Setup

You need to enter the settings page of the router B, then follow the steps illustrated.

① Set **2.4G network** -> ② Set **5G network** -> ③ Click the **Apply** button

Easy Setup
The easy setup will guide you to configure AP for first time. Advanced Setup

Connection Status
Connection Status: PPPoE **Disconnected**

Internet Setting
WAN Connection Type: DHCP

5G Wireless
Network Name(SSID): ①
Password: ②
The Password length should be between 8-63 bits

2.4G Wireless
Network Name(SSID): ③
Password: ④
The Password length should be between 8-63 bits

Apply ⑤

you can change 5G SSID

you can change 2.4G SSID

STEP-2 B-Router Repeater Setup

Enter the **Advanced Setup** page of the router B, then follow the steps illustrated.

① Click **Operation Mode**> ② Select **Repeater Mode**-> ③ Click **Next** button

④ In next page, you should click Scan 2.4G or Scan 5G

⑤ Choose the **A-Router SSID** you need to make the Repeater

Note: This article set to **A** router as an example

⑥ Enter the **password** for the Repeater router

⑦ Click **connect**

TOTO LINK
 The Smartest Network Device

A950RG (Firmware V5.9c.805)

- System Status
- Operation Mode 1
- Network
- IPv6
- 5G Wireless
- 2.4G Wireless
- QoS
- Firewall
- Management

Operation Mode

This page is used to change Operation Mode.

☐ Gateway Mode

☐ Bridge Mode

☒ Repeater Mode 2

☐ WISP Mode

In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPOE, DHCP client, Static IP.

In this mode, connect the superior AP/Router by wire, you can bridge the superior's AP/Router wired signal into wireless Wi-Fi signals for Wi-Fi devices.

In this mode, you can extend the superior Wi-Fi signal by Repeater setting function under the Wireless column to increase the coverage of the wireless signal.

In this mode, all ethernet ports are bridged together and the wireless client will connect to ISP access point. The NAT is enabled and PCs in ethernet ports share the same IP to ISP through wireless LAN.

3 Next

TOTO LINK
 The Smartest Network Device

A950RG (Firmware V5.9c.805)

- System Status
- Operation Mode
- Network
- IPv6
- 5G Wireless
- 2.4G Wireless
- QoS
- Firewall
- Management

Operation Mode

This page is used to change Operation Mode.
Please select a list of sites that need to be relayed. Tip: Click the "Scan" button to search for the current AP site.

Back Scan 2.4G Scan 5G

Channel	Network Name(SSID)	MAC Address	Encryption	Signal	Mode 5
4	TOTOLINK_A7000R_test	F4:28:53:15:46:8C	WPAWPA2-PSK	100%	(B+G+N+AC)
4	土豆芋头	F4:28:53:15:46:9C	WPAWPA2-PSK	100%	(B+G+N+AC)
9	TOTOLINK_Test	64:E5:99:F5:1C:D8	WPAWPA2-PSK	100%	(B+G+N)
1	TOTOLINK_b1ce18	F4:28:53:B1:CE:18	Disable	100%	(B+G+N+AC)

TOTO LINK
 The Smartest Network Device

A950RG (Firmware V5.9c.805)

- System Status
- Operation Mode
- Network
- IPv6
- 5G Wireless
- 2.4G Wireless
- QoS
- Firewall
- Management

Operation Mode

This page is used to change Operation Mode.
If the uplink AP is encrypted, please fill in the correct password, click on the "Connect"; if the uplink AP is not encrypted, please click "Connect"

Network Name(SSID)

TOTOLINK_A7000R_test

MAC Address

F4 : 28 : 53 : 15 : 46 : 8C

Encryption

WPA2-PSK

Encryp Type

AES

Password

6

Connect 7

STEP-3 : B Router Position Display

Move the Router B to a different location for a best Wi-Fi access.



DOWNLOAD

A950RG Repeater Settings – [[Download PDF](#)]
