




TOTOLINK AC1200 Dual Band Smart Home Wi-Fi Installation Guide

[Home](#) » [TOTOLINK](#) » TOTOLINK AC1200 Dual Band Smart Home Wi-Fi Installation Guide 

Contents

- [1 TOTOLINK AC1200 Dual Band Smart Home Wi-Fi](#)
- [2 Hello friend,](#)
- [3 How to Set Up the WiFi Router Mode:](#)
- [4 AP Mode and Satellite](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)




The Smartest Network Device

TOTOLINK AC1200 Dual Band Smart Home Wi-Fi



Hello friend,

Thanks for choosing our Mesh wifi system. Compared with traditional wifi routers and wifi extenders, the Mesh wifi system could provide a whole home coverage with a single wifi name and achieves Seamless Roaming, while you don't need to switch networks, which is more convenient.

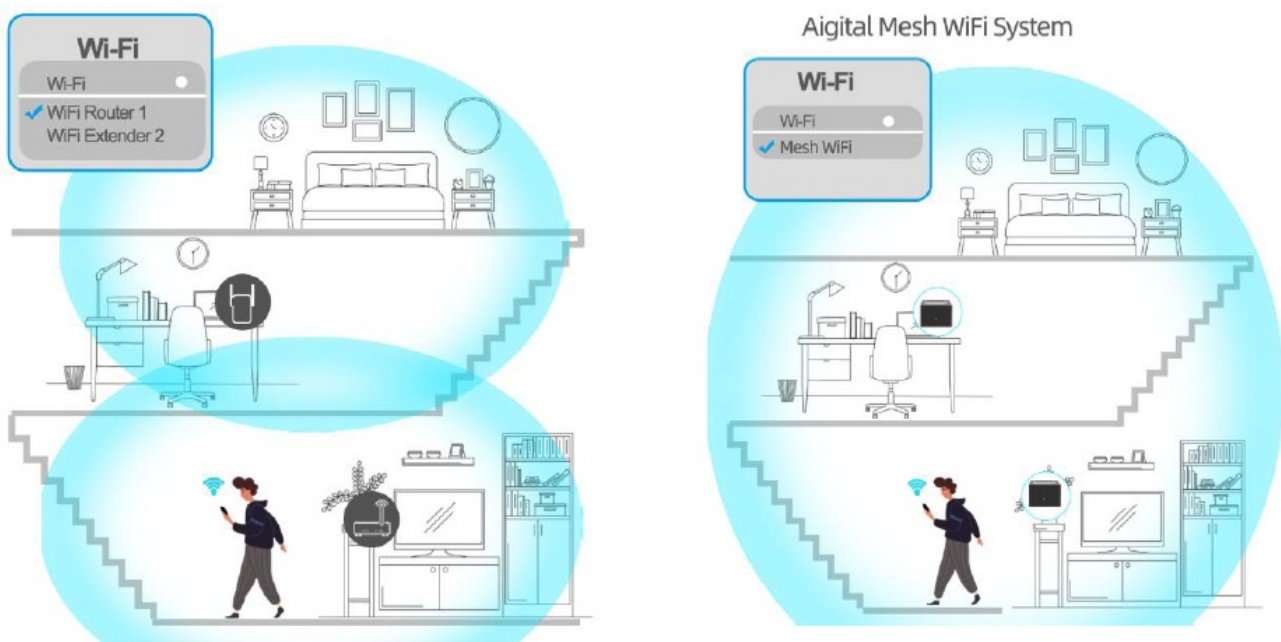

There are 2 using methods:

- **1. Router Mode and Satellites**


— This using methods allows that you don't need existing wifi router at home. You just need to select either of them as master to set as a WiFi Router, then add another one as the satellite, pair with the master device.

- **2. AP Mode and Satellites**


— If you have an existing wifi router at home, and you just want to use these units to boost the wifi range, then you can select either of them as master device to set as AP mode, and add another one as satellite, pair with the master. You can select the most suitable working method.

How to Set Up the WiFi Router Mode:

- Plug into power, connect the master (through WAN port) with your modem(through LAN Port) via RJ-45 Ethernet cable. (Wait for about 45 seconds, the LED will change from Solid Green to Blinking Green.)

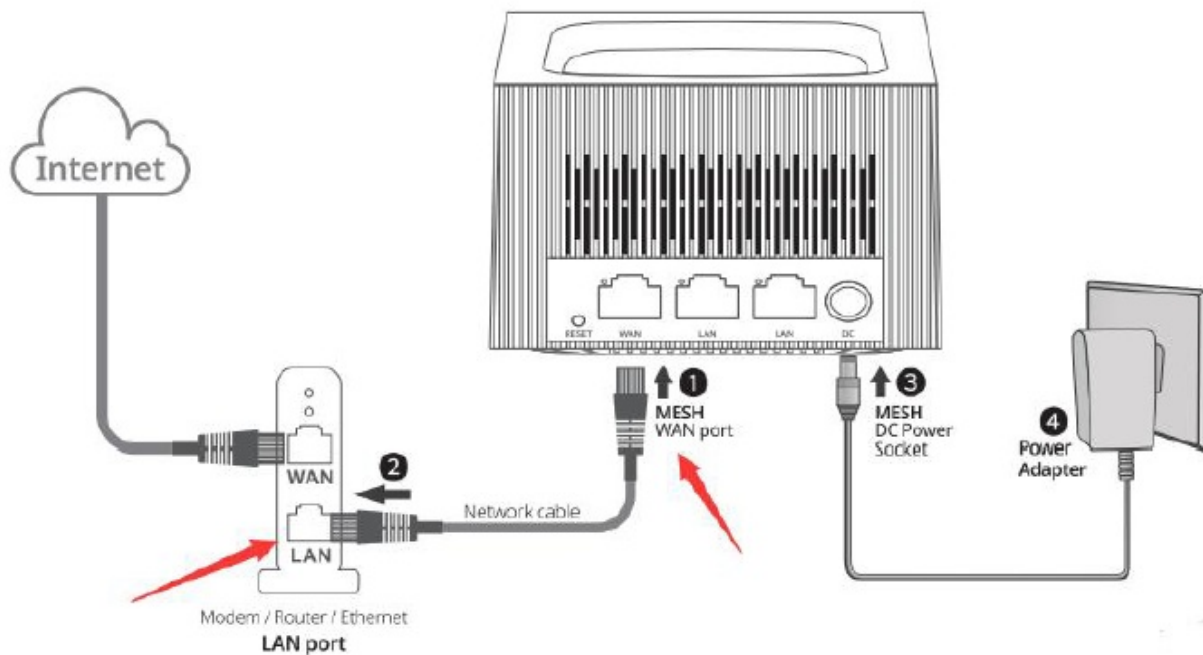

- Connect the wifi signal WiFi_5G_XXXXX or WiFi_XXXXX on the

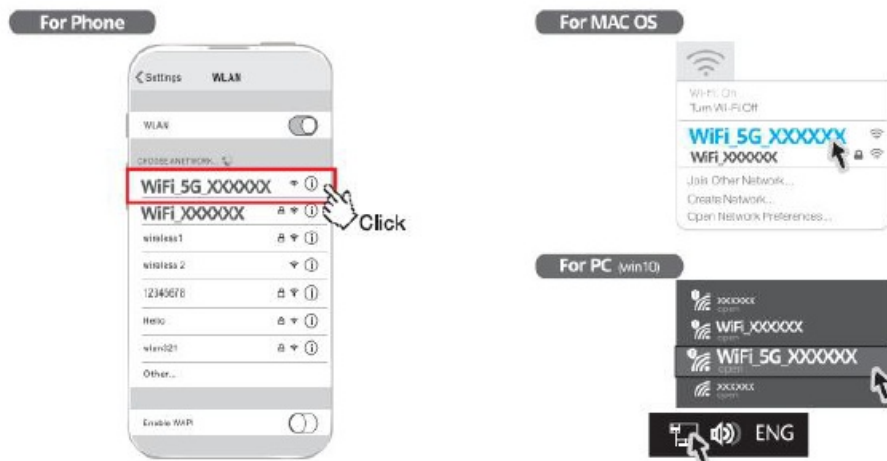

XXXXXX is the last 6 digits letters of MAC Address which appears On the bottom label.

- Open the browser on phone or computer and enter into 192.168.188.1, input default password: admin to login.

← →
192.168.188.1
🔍 →

Administrator Login

[Forgot password?](#)

Quick Setup

Click the Menu, Quick Setup, Next

The screenshot shows the router's web interface. On the left is a sidebar menu with options: Home, Access Devices, Quick Setup (highlighted with a red box), Mesh Setting, Network, Wireless, and Smart QoS. The main area is titled 'Quick Setup' and displays a progress bar with five steps: Time Zone (1, checked), Internet (2), Wireless (3), Change Password (4), and Summary (5). Below the progress bar, the 'Time Zone' is set to '(UTC+08:00) Beijing, HongKong, Taipei, Philippines, Singapore'. At the bottom are 'Exit' and 'Next' buttons, with a red arrow pointing to the 'Next' button.

- Click Connection Type, Select PPPoE, input the User name and Password (Broadband user name and password, which are provided by your network provider).

This screenshot shows the 'Internet' configuration step in the 'Quick Setup' wizard. The progress bar at the top shows 'Time Zone' and 'Internet' as completed steps (checked), while 'Wireless' (3), 'Change Password' (4), and 'Summary' (5) are pending. The 'Connection type' dropdown menu is open, showing options: PPPoE (selected and highlighted with a red arrow), Static IP, and Dynamic IP. Below the dropdown are input fields for 'User name' and 'Password', both highlighted with red boxes. A 'MAC address' field is also present, showing the value '00:1F:01:35:64:D5'. At the bottom, there are 'Back', 'Auto detect', and 'Next' buttons, with a red arrow pointing to the 'Next' button.

- Set Network name and Password for 2.4G and 5G wifi.

Quick Setup



Wireless 2.4GHz

Radio On/Off ☒

Network name

Password

Wireless 5GHz

Radio On/Off ☒

Network name

Password

[Back](#) [Next](#)

- Set administrator login password.



Login Password

☒ Use 2.4G wireless password

[Back](#) [Next](#)

- Click Done to finish the configuration.

Time Zone ✓ Internet ✓ Wireless ✓ Change Password ✓ Summary ✓

Summary	
Connection type:	Dynamic IP
Login Password:	a@20102010
Wireless 2.4GHz	
Network name:	WiFi_3564D8
Password:	a@20102010
Wireless 5GHz	
Network name:	WiFi_5G_3564D4
Password:	a@20102010


Back Done

- **Add satellite to create whole home mesh wifi system.**

After finished the setup of the master wifi router, you can add another unit as the satellite.

Put the satellite within 1 meter of the master and power it on. Wait for about 45 seconds, press the M button on the Master unit for 2 seconds and release it, the indicator LED on the Master device turns orange blinking green.

Wait for about 1 minute, the indicator LED on the Satellite turns orange blinking green, Then wait for about 110 seconds, the LED on the Satellite turns Solid Green. That means pairing successful. You can move the satellite to a suitable location (Within 10 Meters of the Master unit)

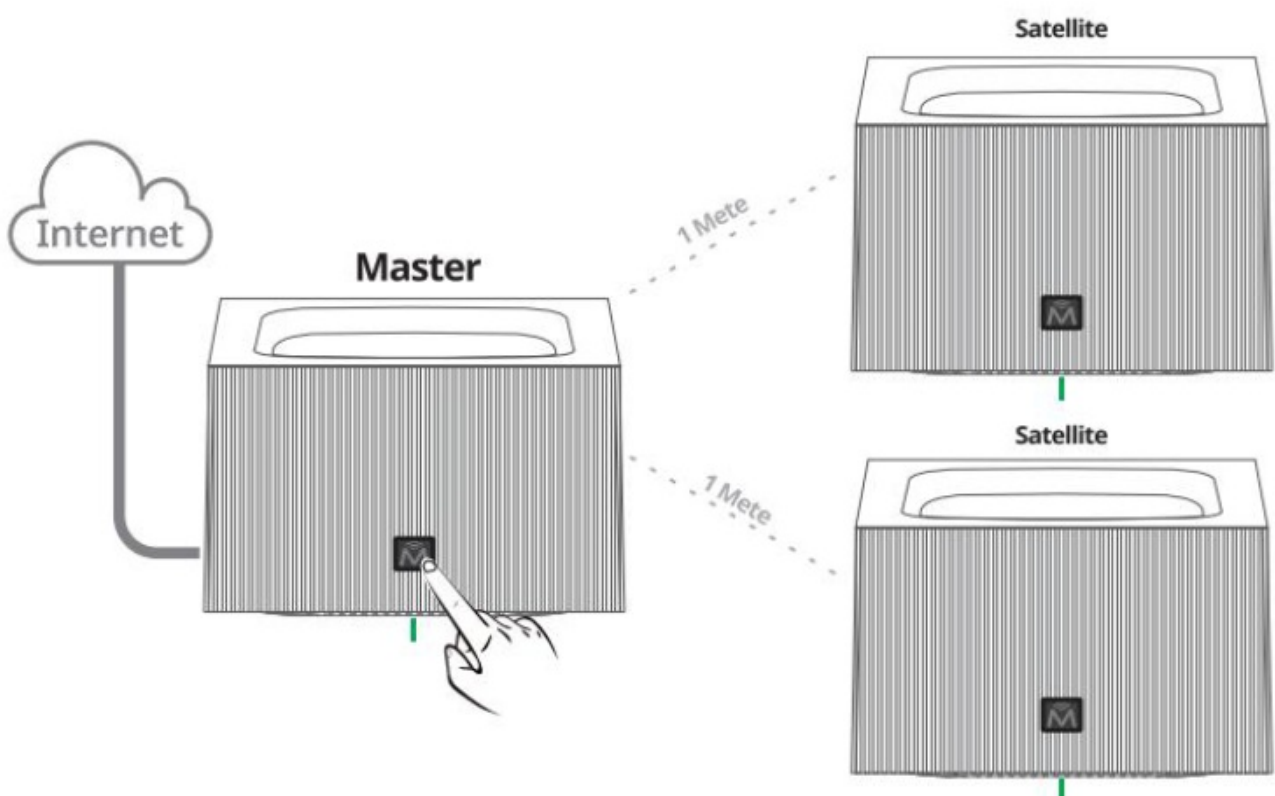


AP Mode and Satellite

If you have existing wifi router at home and you just want to add these as satellites to expand wifi range, then you need to set one unit to AP mode, then add another one as satellite.

How to Set up the first one?

1~3 Same steps as Router Mode (See setup details from page 2).

- After enter into the setup page, please click Menu – Wireless – Basic, then set the wifi name and password for the Mesh wifi.

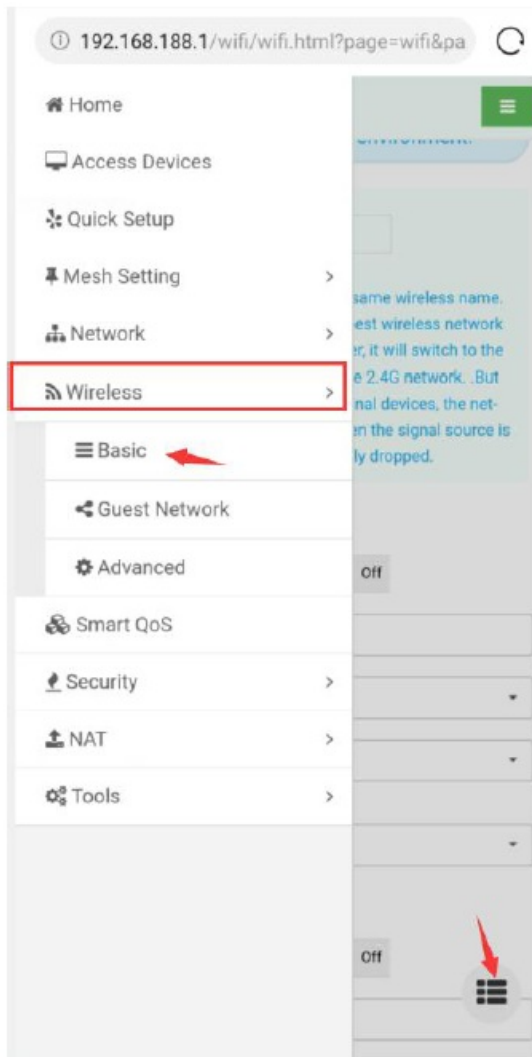A screenshot of the wireless settings page. It is divided into two sections: '2.4G' and '5G'. In the '2.4G' section, 'Radio On/Off' is set to 'On', 'Network name' is 'WIFI_71F5FE', 'Encryption On/Off' is 'On' (highlighted with a red arrow), 'Password' is empty, 'Channel bandwidth' is '40MHz', and 'Channel' is 'Auto'. In the '5G' section, 'Radio On/Off' is set to 'On', 'Network name' is 'WIFI_5G_71F5FA', 'Encryption On/Off' is 'On' (highlighted with a red arrow), 'Password' is empty, 'Channel bandwidth' is '80MHz', and 'Channel' is '149'. An 'Apply' button is at the bottom.

- After setup is successful, please add satellite. Same steps as Router mode. (Pls see step 5 on page 5)


Please select the most suitable using method for your home.

If any inquiries about the setup or use, please feel free to contact our professional service team via mail [help@aigital.com] anytime and we will solve it for you asap.

Thank you!

Digital Team

Documents / Resources

	<p>TOTOLINK AC1200 Dual Band Smart Home Wi-Fi [pdf] Installation Guide</p> <p>AC1200 Dual Band Smart Home Wi-Fi, AC1200, Dual Band Smart Home Wi-Fi</p>
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.