

# How does use the TOTOLINK extender APP

How does use the TOTOLINK extender APP?

It is suitable for: **EX1200M**

## Contents

- [1 Application introduction:](#)
- [2 Set up steps](#)
- [3 FAQ Common problem](#)
- [4 DOWNLOAD](#)
- [5 Related Posts](#)

## Application introduction:

This document describes how to extend your Wi-Fi network using the TOTOLINK extender APP. Here is an example of EX1200M.

## Set up steps


### STEP-1:

- \* Press the reset button/hole on the extender to reset the expander before use.
- \* Connect your phone to the extender WIFI signal.


**Note:** The default Wi-Fi name and password are printed on the Wi-Fi card to connect to the extender.

### STEP-2:

2-1. First, open the APP and click NETX.

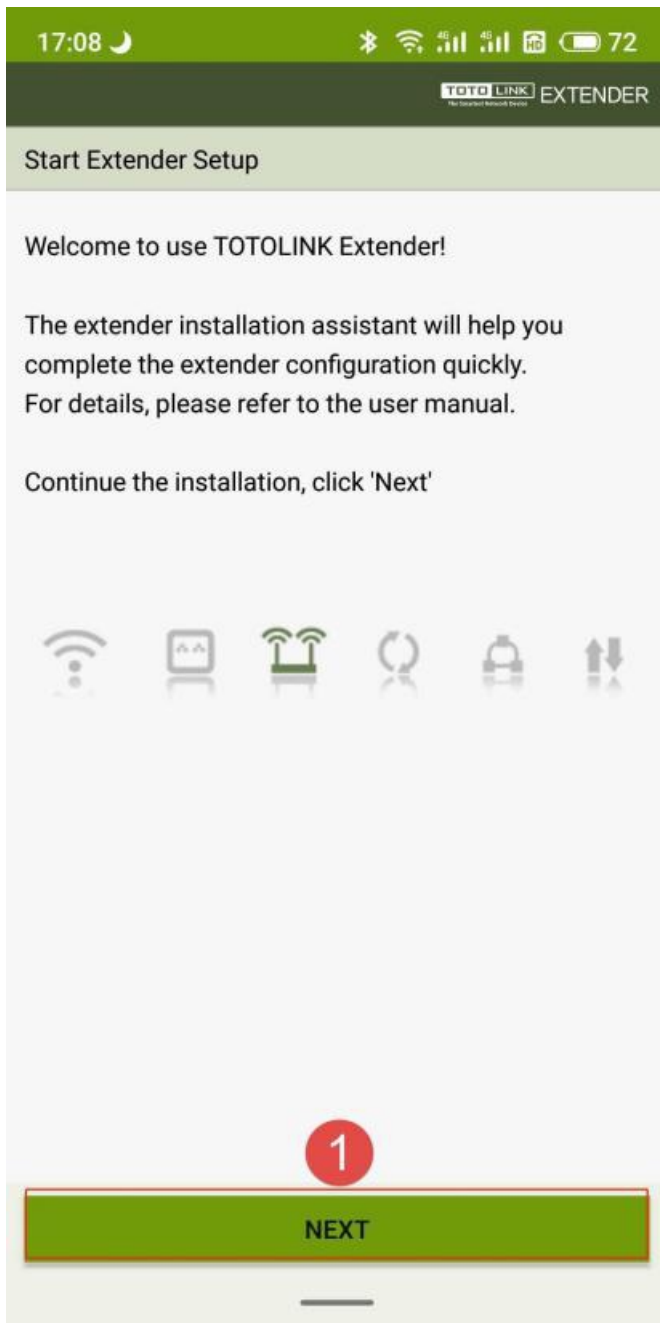

2-2. Check Confirm and click NEXT.

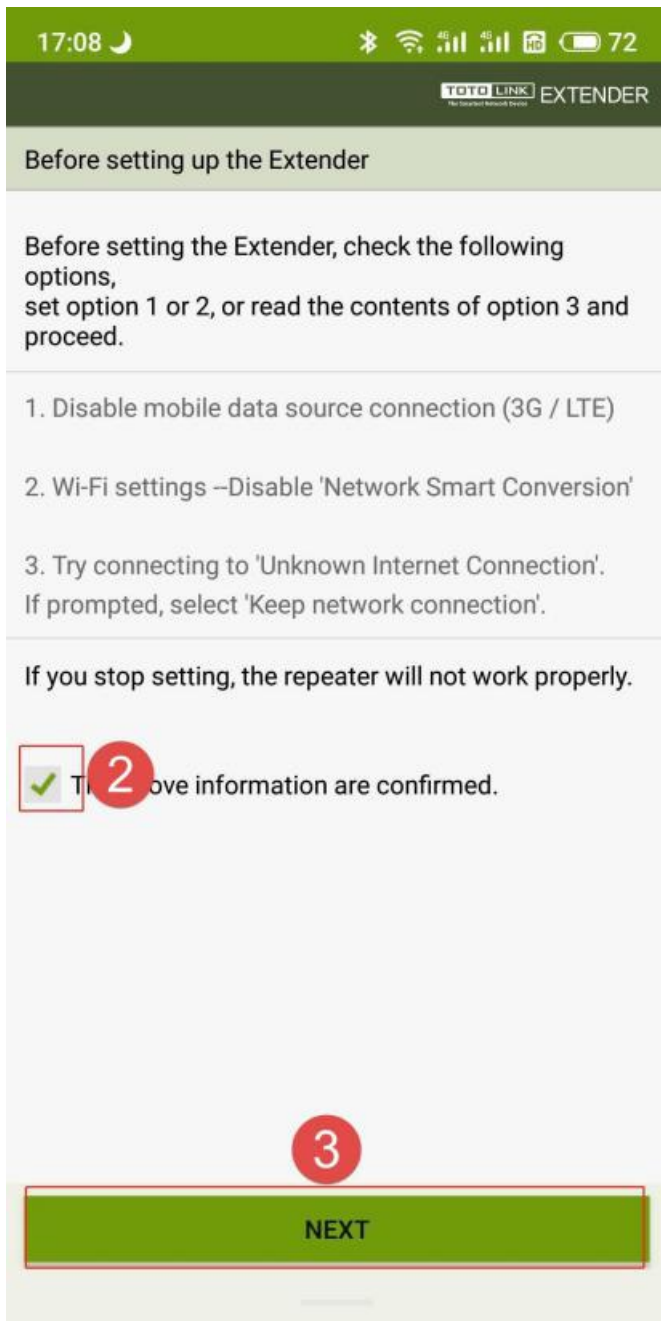

2-3. According to actual needs, select the corresponding expansion mode (default: 2.4G → 2.4G and 5G). Here is an example of 2.4G and 5G → 2.4G and 5G (parallel):

- ④Select expansion mode: 2.4G and 5G→2.4G and 5G (parallel)
- ⑤Click the “AP Scan” option to search for the corresponding 2.4G wireless network around
- ⑥Enter the extended 2.4G wireless network password
- ⑦Click the “AP Scan” option to search for the corresponding 5G wireless network around
- ⑧Enter the extended 5G wireless network password
- ⑨Click the “Save Settings and Restart” button

17:09 72

**TOTOLINK** EXTENDER

TOTOLINK Extender EX1200M

IP Settings

IP Address Settings  ☐ Manual

Extender Mode 2.4GHz, 5GHz -> 2.4GHz, **4**

Wi-Fi Extension Expanded Wi-Fi

2.4GHz Wi-Fi Extension Settings

Wi-Fi Extension  **5**

Wi-Fi Password  **6**


5GHz Wi-Fi Extension Settings

Wi-Fi Extension  **7**

Wi-Fi Password  **8**


Save settings **9** Restart the extender

2-4. Click “Confirm” in the prompt box that pops up, the extender will restart, and you will see the Wi-Fi name after the reboot.

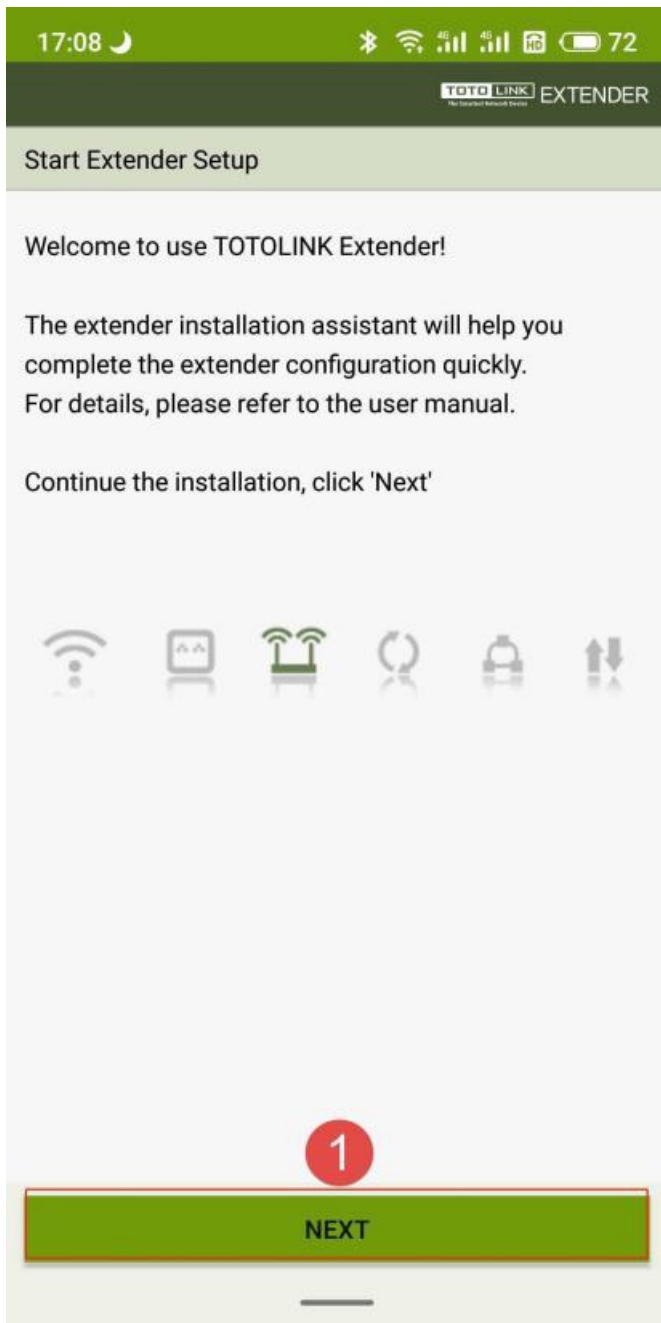

### STEP-3:

After the setup is complete, you can move the extender to a different location.

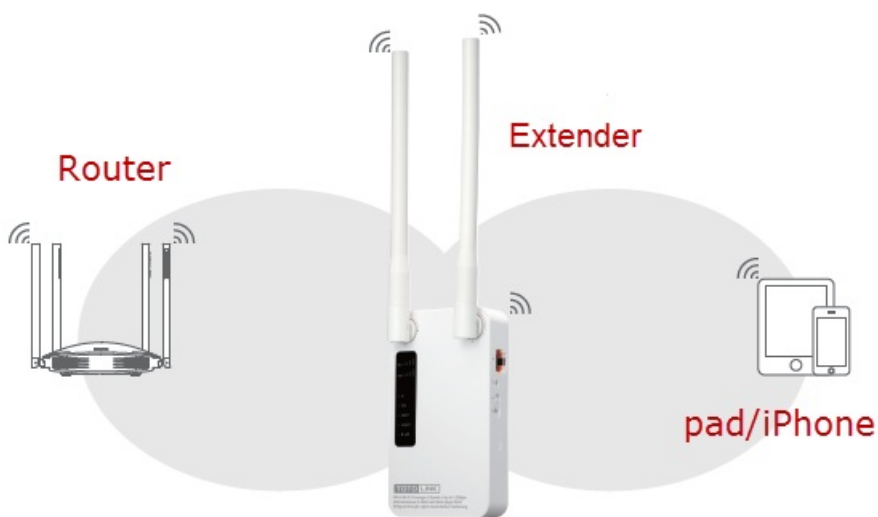

## FAQ Common problem

### 1. Band modes for switching frequency ranges

Modes	Description
2.4G →2.4G	Work with both the wireless router and client devices in 2.4G network.
2.4G →5G	Work with both the wireless router and client devices in 5G network.
2.4G →5G	Work with the wireless router in 2.4G network and client devices in 5G network.
5G →2.4G	Work with the wireless router in 5G network and client devices in 2.4G network.
2.4G →2.4G&5G( Default)	Work with the wireless router in 2.4G network and client devices in 2.4G & 5G networks.
5G →2.4G&5G	Work with the wireless router in 2.4G network and client devices in 2.4G & 5G networks.
2.4G&5G→2.4G&5G (Paralleled)	Work with the wireless router in 2.4G & 5G networks and client devices in the corresponding network.
2.4G&5G→2.4G&5G (Crossed)	Work with the wireless router in 2.4G & 5G networks and client devices in the 5G & 2.4G respectively.

### 2. If I want to change the Extender to extend another Wi-Fi network within the range but cannot access its configuration page now, what should I do?

A: Restore the Extender to its factory defaults and then start configuration as needed. To reset the Extender, stick a paper clip into the side panel “RST” hole and hold it for over 5 seconds until the CPU LED flashes quickly.

### 3. Scan the QR code to download our cell phone App for quick setup.



---

## DOWNLOAD

How does use the TOTOLINK extender APP – [[Download PDF](#)]

---

---

Manuals+.