

How to set up the router to connect to the Internet

Contents

- [1 How to set up the router to connect to the Internet?](#)
- [2 Method One: login via tablet/Cellphone](#)
- [3 Method Two: login via PC](#)
- [4 DOWNLOAD](#)
- [5 Related Posts](#)

How to set up the router to connect to the Internet?

It is suitable for: **X6000R,X5000R,A3300R,A720R,N350RT,N200RE_V5,T6,T8,X18,X30,X60**

STEP 1:

Connect the broadband cable that can access the Internet to the WAN port of the router

STEP 2:

Connect the broadband cable that can access the Internet to the WAN port of the router

The computer is connected to any LAN port 1, 2,3 or 4 of the router through a network cable, or wireless devices such as notebooks and smart phones are connected to the wireless signal of the router through wireless connection (the name of the factory wireless signal can be viewed on the sticker at the bottom of the router, and it is not encrypted when leaving the factory) ;



Method One: login via tablet/Cellphone

STEP 1:

Find TOTOLINK_XXXX or TOTOLINK_XXXX_5G (XXXX is the corresponding product model) on the WLAN list of your Phone, and choose to connect. Then any Web browser on your Phone and enter <http://itotolink.net> on the address bar.



STEP 2:

Enter the password “admin” in the next page and click Login.

English >



Administrator Login


 Please enter password

[Forgot password?](#)

LOGIN

STEP 3:

Click Quick Setup on the coming page.

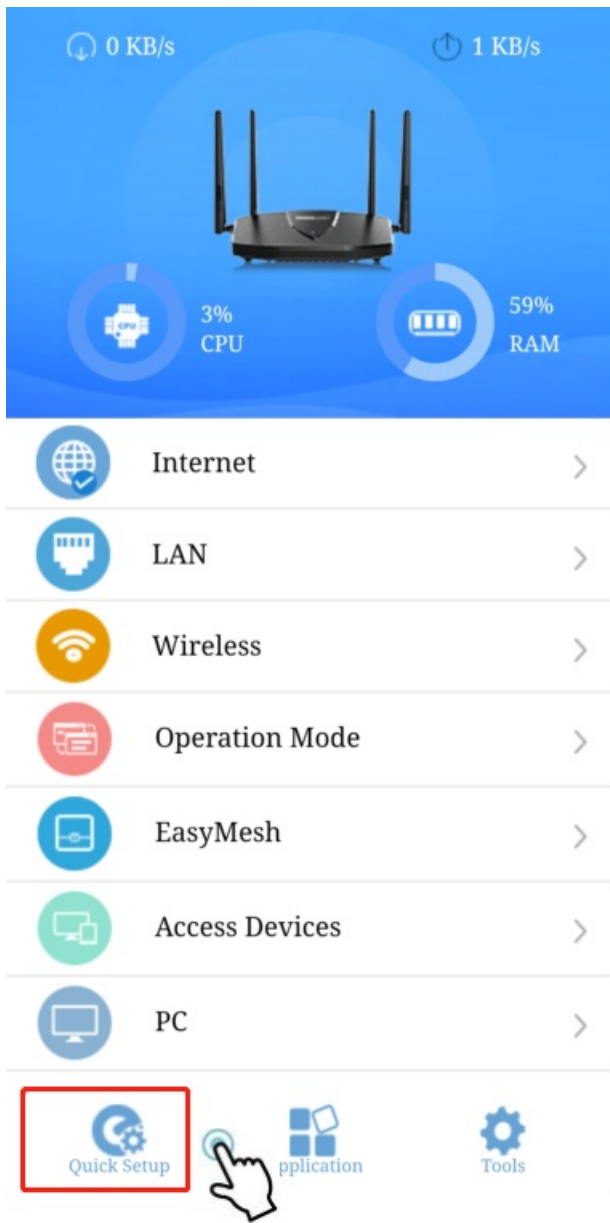

STEP 4:

Select the corresponding time zone according to your country or region then click Next.

Time Zone

Time Zone

(UTC-00:00) Gambia, Liberia, Morc >

EXIT

NEXT



STEP 5:

Select the type of network access, and select a suitable setting point according to the Internet access method provided by the network operator.

<

Quick Setup

Internet

Connection Type

Static IP >

Auto Detect

IP Address

Subnet Mask

Gateway

Primary DNS

192.168.1.1

Secondary DNS

BACK

NEXT

<

Quick Setup

Internet

Connection Type

Dynamic IP >

Auto Detect

IP Address

Subnet Mask

Gateway

Primary DNS

Secondary DNS

BACK

NEXT

Quick Setup

Internet

Connection Type

PPPoE

Auto Detect

User Name

Password

BACK

NEXT

STEP 6:

Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could also revise the default Wi-Fi name) and then click Next.

itotolink.net/phone/wi

<

Quick Setup

Wireless

Multi-frequency

Wireless 2.4GHz

SSID

TOTOLINK_X6000R

Password

Hide SSID

Support WPA3 encryption

Wireless 5GHz

SSID

TOTOLINK_X6000R_5G

Password

Hide SSID

Support WPA3 encryption

BACK

NEXT

STEP 7:

Set the login GUI interface administrator password, and click Next

下午3:47 | 46.8K/s

itotolink.net/phone/wi

<

Quick Setup

Change Password

Login Password

Use 2.4G wireless password

BACK

NEXT

STEP 8:

On this page, you can view the network information set by the user, click Finish and wait for the router to save the settings. Then the router automatically restarts and disconnects. Please search for the wireless name you set in the WIFI list of your mobile phone, and enter the password to connect to the WIFI (hint: please keep in mind the information displayed on the configuration summary page, and it is recommended to save the screenshot to prevent forgetting.)

itotolink.net/phone/wi

<

Quick Setup

Summary

Connection Type	Dynamic IP
Wireless 2.4GHz	On
SSID	X6000R
Password	12345678
Wireless 5GHz	On
SSID	X6000R_5G
Password	12345678
Login Password	admin


BACK

DONE

Method Two: login via PC


STEP 1:

Connect your computer to the router by cable or wireless. Then run any Web browser and enter <http://itotolink.net> in the address bar.

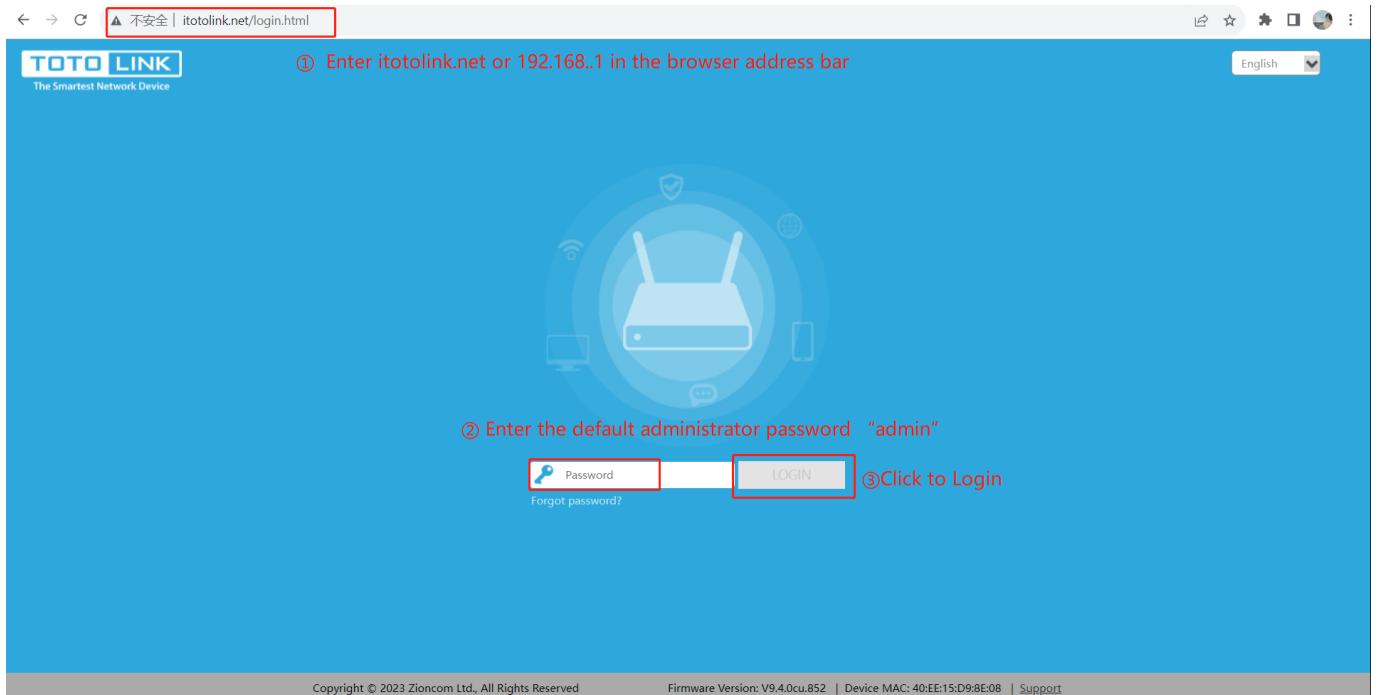

STEP 2:

Click Quick Setup.

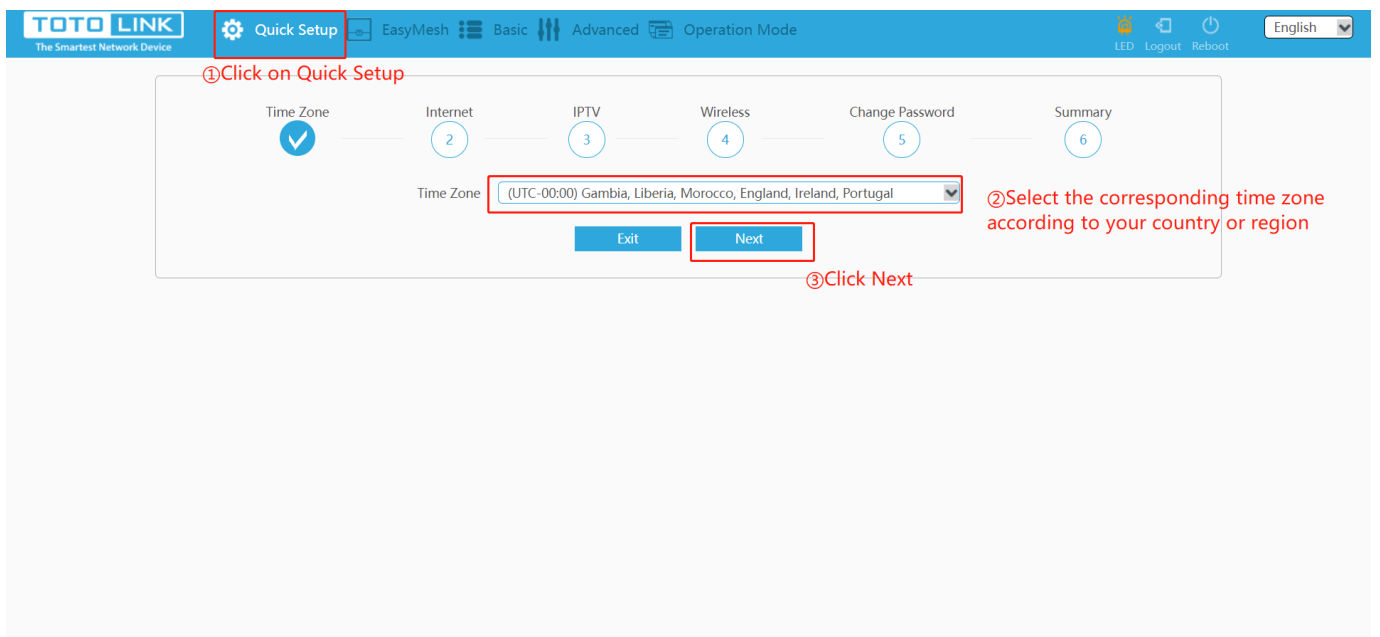

STEP 3:

Choose an internet connection method

TOTO LINK
The Smartest Network Device

Quick SetupEasyMeshBasicAdvancedOperation Mode

LEDLogoutRebootEnglish

Time ZoneInternetIPTVWirelessChange PasswordSummary

☒ Dynamic IP

☐ Static IP

☐ PPPoE

☐ PPTP

☐ L2TP

If your ISP only allows internet access to a specific MAC address, you need to clone the MAC address. If you don't sure, select 'Use default MAC address'.

☒ Use default MAC address

☐ Clone PC's MAC address

MAC Address40:EE:15:D9:8E:09

①Choose an appropriate internet access method according to the network environment

BackAuto DetectNext

②Click Next

Copyright © 2023 Zioncom Ltd., All Rights ReservedFirmware Version: V9.4.0cu.852 | Device MAC: 40:EE:15:D9:8E:08 | Support

STEP 4:

IPTV is turned off by default and can be turned on if necessary. Please refer to the detailed settings for reference

TOTO LINK
The Smartest Network Device

Quick SetupEasyMeshBasicAdvancedOperation Mode

LEDLogoutRebootEnglish

Time ZoneInternetIPTVWirelessChange PasswordSummary

☒ Dynamic IP

☐ Static IP

☐ PPPoE

☐ PPTP

☐ L2TP

If your ISP only allows internet access to a specific MAC address, you need to clone the MAC address. If you don't sure, select 'Use default MAC address'.

☒ Use default MAC address

☐ Clone PC's MAC address

MAC Address40:EE:15:D9:8E:09

IPTV On/Off

BackNext

If you need to set IPTV, you can turn it on, click Next

STEP 5:

Set wireless SSID and password

Multi-frequency ☐

Wireless 2.4GHz

Wireless On/Off ☒

SSID

Encryption On/Off ☒

Password

☐ Hide

☐ Support WPA3 encryption

Wireless 5GHz

Wireless On/Off ☒

SSID

Encryption On/Off ☒

Password

☐ Hide

☐ Support WPA3 encryption

① Set 2.4Ghz and 5Ghz SSID and Password

② Click Next

STEP 6:

Set administrator password

TOTO LINK The Smartest Network Device

Quick Setup EasyMesh Basic Advanced Operation Mode

LED Logout Reboot English

Time Zone ☒ Internet ☒ IPTV ☒ Wireless ☒ Change Password ☒ Summary 6

Login Password


☐ Use 2.4G wireless password

① Set admin password

② Click Next

STEP 7:

Configuration Summary, Wait for the progress bar to load and experience the network

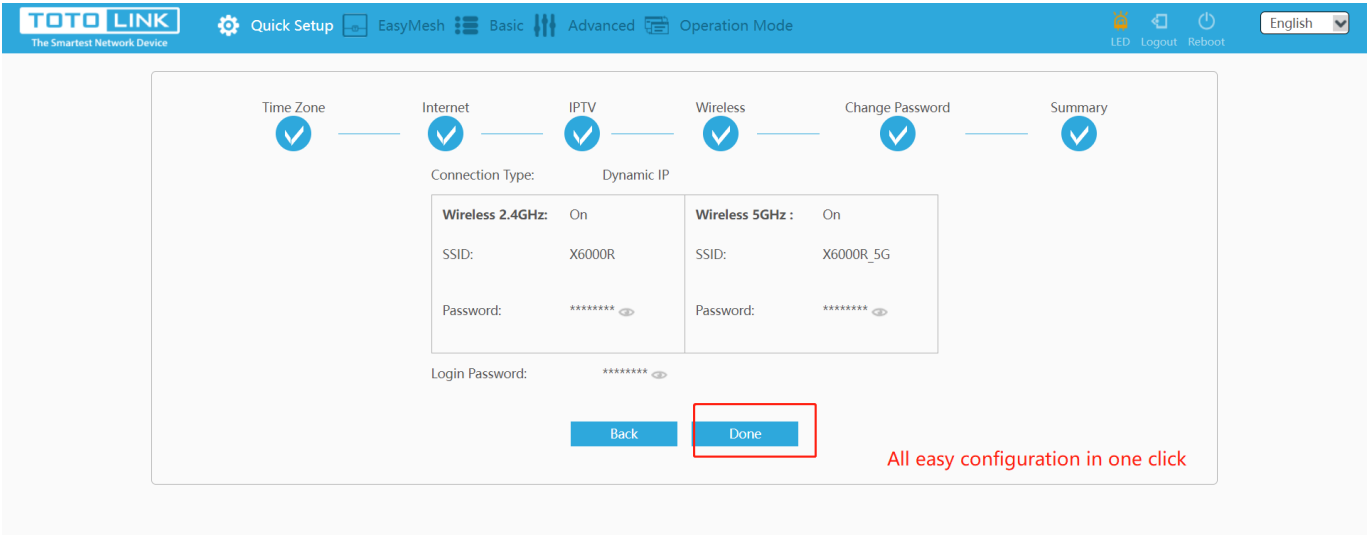

DOWNLOAD

How to set up the router to connect to the Internet – [[Download PDF](#)]
