

Contents [[hide](#)]

- [1 WVX DB60 Mini Computer](#)
- [2 Setting up your system](#)
- [3 Care during use](#)
- [4 Specification](#)
- [5 Package Contents](#)
- [6 Know Your Mini PC](#)
- [7 Getting started](#)
- [8 EC Conformity Statement](#)
- [9 FCC WARNING](#)
- [10 Frequently Asked Questions](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

WVX

WVX DB60 Mini Computer



CAUTIONS

Your Mini PC is designed and tested to meet the latest standards of safety for information technology equipment. However, to ensure your safety, it is important that you read the following safety instructions.

Setting up your system

- Read and follow all instructions in the documentation before you operate your system.
- Do not use this product near water or a heated source.
- Set up the system on a stable surface.
- Openings on the chassis are for ventilation. Do not block or cover these openings. Make sure you leave plenty of space around the system for ventilation. Never insert objects of any kind into the ventilation openings.
- Use this product in environments with ambient temperatures between 0°C and 35°C.
- If you use an extension cord, make sure that the total ampere rating of the devices plugged into the extension cord does not exceed its ampere rating.
- This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Care during use

- Do not walk on the power cord or allow anything to rest on it.
- Do not spill water or any other liquids on your system.
- When the system is turned off a small amount of electrical current still flows.
- Always unplug the power cord from the power outlets before cleaning the system.
- If you encounter the following technical problems with the problems unplug the power cord and contact a qualified service technician or your retailer.
 - The power cord or plug is damaged.
 - Liquid has been spilled into the system.
 - The system does not function properly even if you follow the operating instructions.
 - The system was dropped or the cabinet is damaged.
 - The system performance changes.

Lithium-Ion Battery Warning

CAUTION: Danger of explosion if the battery is incorrectly replaced.


Replace only with the same or equivalent type recommended by the manufacturer.

Dispose of used batteries according to the manufacturer's instructions.

Specification

Item	DA2060-H001-JL	
Code name	Alder lake	intel Alder lake I5-12450H
CPU	processor	8Cores 12Threads Base 2.0GHz,Burst 4.4GHz
	Lithography	10 nm
	Cache	12 MB Intel® Smart Cache
GPU	Integrated GPU	Intel® UHD Graphics for 12th Gen Intel® Processors
Memory	Memory type	8GB/16GB DDR5 (Option)
Storage	M.2 2280 SSD	256GB/512GB (Option)
	M.2 2280 SSD	Scalable
Wifi	M.2 2230	802.11 a/b/g/n/ac and Bluetooth 5.0
I/O	Front	
	Audio Jack	1*Ø3.5mm Combo
	USB Type_C	1*USB C(PD/DP/USB 3.2 Gen 2) Compatibility USB2.0 data only
	USB Type_A	2*USB3.2 Gen2
	Button	1*Power Button
	Rear	
	HDMI+USB Type_C	1*Standard HDMI1.4 TMDS-CPU+1*USB C (PD)
	HDMI+USB Type_C	1*Standard HDMI2.1 TMDS-CPU+1*USB C(PD/DP/USB 3.2 Gen 2)
	USB Type_A	2*USB3.2 Gen2
	RJ45	1* 2.5GLAN
		1*GLAN
power	USB Type_C	100W PD
System		Windows 11

Package Contents

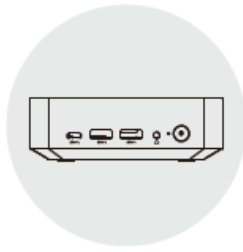

Mini computer




Adapter



User Manual

Know Your Mini PC

1.

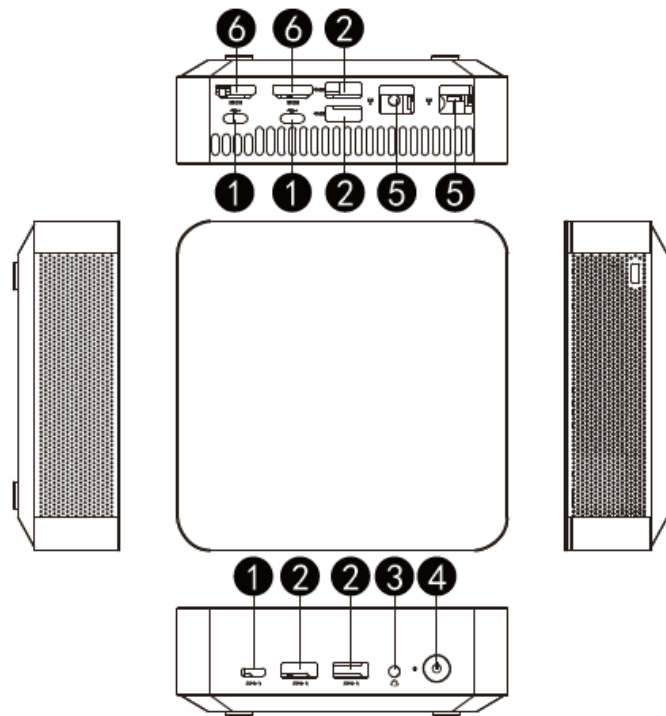

Type-C

2. USB2.0
3. Audio Jack
4. Power Button
5. RJ45
6. HDMI

Getting started

Connect the AC power adapter to your Mini PC:

1. Connect the DC power connector into your Mini PC's power (DC)
2. Plug the AC power adapter into a 100V-240V power source.

NOTE:

The power adapter may vary in appearance, depending on models and your region.

• Connect a display monitor to your Mini PC:

Connect one end of an HDMI cable to an external display, and the other end of the cable to your Mini PC's HDMI port

• Connect a keyboard and mouse to your Mini PC:

You can generally any USB keyboard and mouse to your Mini You can also connect a USB dongle for a wireless keyboard and mouse set.

- **Turn on your Mini PC**

Press the power button to turn on your Mini PC

- **Turning your Mini PC off**

If your Mini PC is unresponsive, press and hold the power button for at least four (4) seconds until your Mini PC turns off.

Enter the BIOS Setup

WARNING!

BIOS (Basic Input and Output System) stores system hardware settings that are needed for system startup in the Mini PC.

In normal circumstances, the default BIOS settings apply to most conditions to ensure optimal performance.

Do not change the default BIOS settings except in the following circumstances:

- An error message appears on the screen during the system bootup and requests you to run the BIOS Setup.
- You have installed a new system component that requires further BIOS settings or updates

Inappropriate BIOS settings may result to instability or boot failure. We strongly recommend that you change the BIOS settings only with the help of trained service personnel.

Load default BIOS settings

- Enter the BIOS by pressing <F2> on the POST screen
- Enter Fast Boot by pressing <F12> on the POST screen

WARNING

This equipment is not suitable for use in locations where children are likely to be present.


The Warranty does not apply to the products that have been disassembled by users. Each Mini PC has its unique SN code, which is at the bottom of the product. When you need our after-sales support, please provide us with SN code to ensure that you could enjoy our quick and accurate service.

EC Conformity Statement




This product and – if applicable – the supplied accessories too are marked with “CE” and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU. Wi-Fi device: the RE Directive 2013/53/EU.



 2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info



 2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following

two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.


Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

ITEM	PART NO	PART NAME	QUT	NOTE

SIX UNITED Technology Co.,Ltd.						
MATERIAL		MODEL		DESCRIPTION:	DATE	20231216
COLOR		UNIT	MM		DESIGNED	
				PART NO:	REV: 1.0	CHECKED
					SCALE:	SIZE: A4

Frequently Asked Questions

- **Q: How do I check the current memory configuration of the device?**

A: You can check the memory configuration in the device settings under ‘System’ or ‘About’ section.


- **Q: Can I upgrade the storage on this device?**

A: Yes, you can upgrade the storage by installing a compatible M.2 2280 SSD with higher capacity.

- **Q: Is this device compatible with Windows 10?**

A: The device comes pre-installed with Windows 11, but it may also be compatible with Windows 10 based on system requirements.

Documents / Resources

	WVX DB60 Mini Computer [pdf] User Manual T01, 2BLRA-T01, 2BLRAT01, DB60 Mini Computer, DB60, Mini Computer, Computer
---	---

References

- [User Manual](#)

🔍 2BLRA-T01 , 2BLRAT01, Computer, DB60, DB60 Mini Computer, Mini computer, T01 ,

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.