



# ZALMAN S3 ATX Mid Tower Computer Case User Manual

[Home](#) » [ZALMAN](#) » ZALMAN S3 ATX Mid Tower Computer Case User Manual

## Contents [ [hide](#) ]

- [1 ZALMAN S3 ATX Mid Tower Computer Case](#)
- [2 Precautions](#)
- [3 Specifications](#)
- [4 I/O Port](#)
- [5 Accessories Component](#)
- [6 Cable Connection](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

The ZALMAN logo, consisting of the word "ZALMAN" in a bold, white, sans-serif font, set against a dark gray rectangular background.

**ZALMAN S3 ATX Mid Tower Computer Case**




## Precautions

- Read this manual carefully before installing.
- Check the product and components before installing. If you find any abnormality, contact the location where you purchased the product for a replacement or refund.
- Wear gloves to prevent accidents when installing the product.
- Severe damage may occur when mounting the system, so do not apply excessive force.
- Connecting the cable incorrectly may cause a fire due to a short circuit. Make sure to refer to the manual when connecting the cable.
- Be careful not to block the ventilation hole of the product when using the system.
- Avoid locations with direct sunlight, water, moisture, oil, and excessive dust. Store and use the product in a well-ventilated location.
- Do not wipe the surface of the product using chemicals. (organic solvents such as alcohol or acetone)
- Do not insert your hand or other object into the product during operation, as this may injure your hand or damage the object.
- Store and use the product out of children's reach.
- Our company assumes no responsibility for any problem that occurs due to the use of the product for purposes other than its designated purposes and/or the carelessness of the consumer.
- The exterior design and specifications of the product are subject to change without prior notice to consumers for quality improvement.

## Specifications

Model		S3	S3(KOR)
Case Form Factor		ATX Mid-Tower	
Dimensions		412(D)x 189(W)x45l(H)mm	
Weight		3.7kg	3.8kg
Case Materials		Steel, Plastic, Acrylic	
Motherboard Support		ATX / mATX / Mini-ITX	
Maximum VGA Length		330mm	
Maximum CPU Cooler Height		156mm	
Maximum PSU Length		180mm	
PCI Expansion Slots			
Cose Drive Bays		2 X 3.5", 2 X 2.5"	
Fan Support	Front	3 x 120mm	
	Top	2 x 120mm	
	Rear	1 x 120mm	
	Bottom	2 x 120mm	
Fan(s) Included	Front		2x 120mm
	Rear	1 x 120mm	1 x 120mm
Radiator Support	Front	1x 120mm	
	Rear	1x 120mm	
I/O Ports		1 x Headphone, 1 x Mic, 2 x USB 2.0, 1 x USB 3.0	

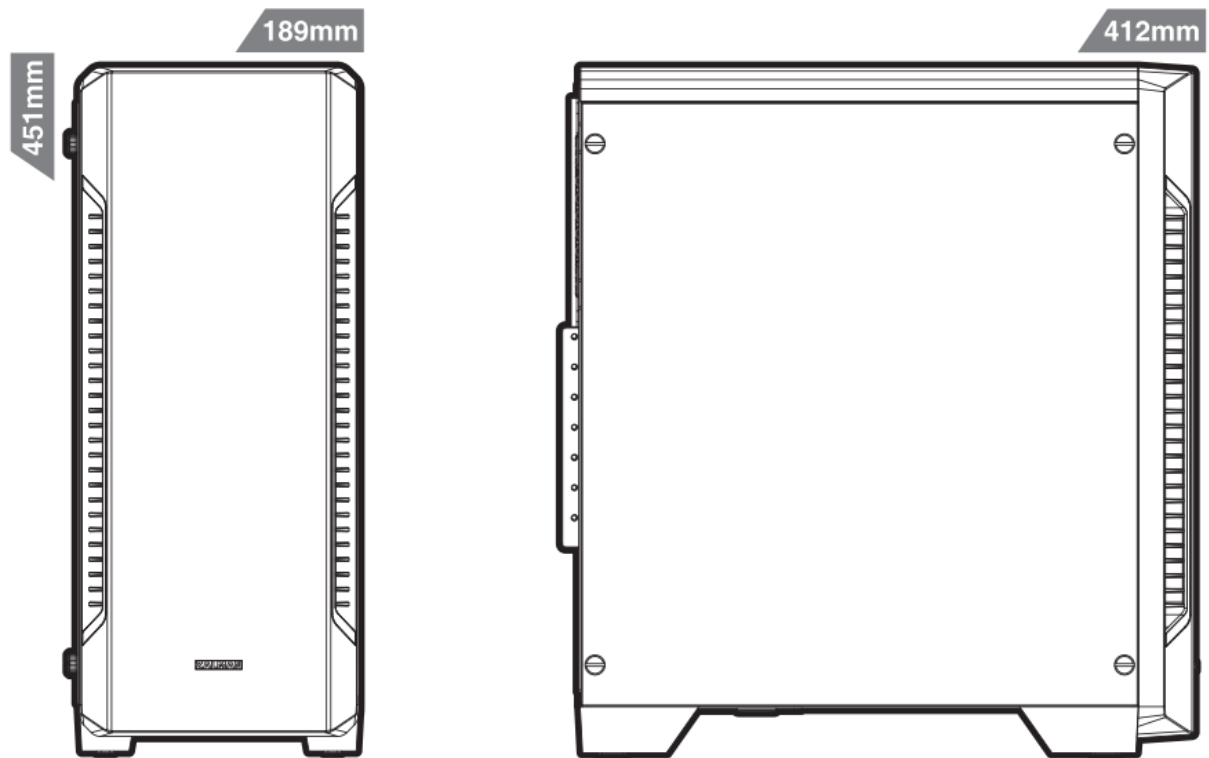

## 1/0 Port

#	Part	#	Part	#	Part	#	Part
<b>A</b>	Power button	<b>B</b>	Microphone jack	<b>C</b>	Headphone jack	<b>D</b>	USB 2.0
<b>E</b>	USB 3.0	<b>F</b>	Reset button	<b>G</b>	Power LED	<b>H</b>	HDD LED

## Accessories Component



Manual



PCI Slot cover  
x 2



Cable tie  
x 5



USB Rubber cover  
x 3



Media Rubber cover  
x 2



HDD  
Screw x 8



SSD / MB  
Screw x 18



PSU / VGA  
Screw x 8




Motherboard  
Stand-off x 3



FAN  
Screw x 8


## Separating the side panel

### Side Panel Removal

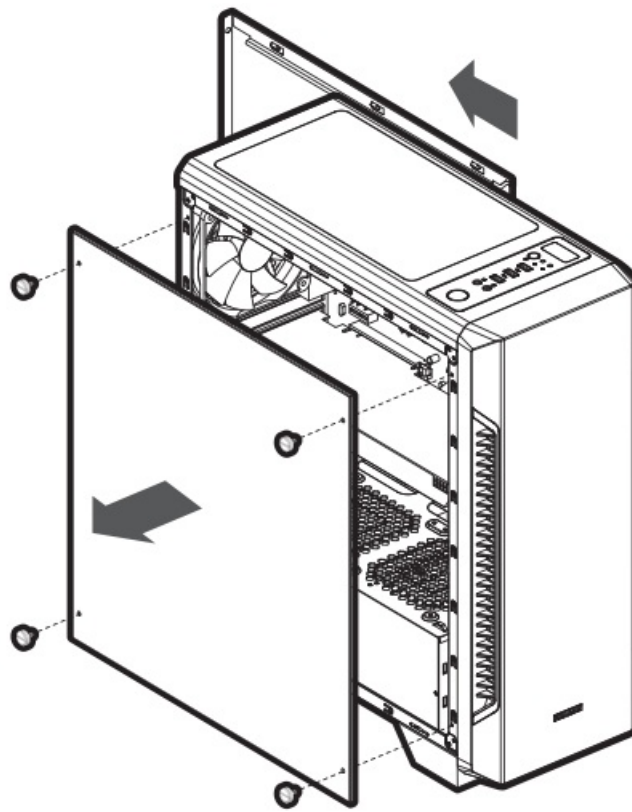


### Mounting the motherboard

As 6 stand-offs are mounted by default, insert an additional stand-off according to the type of motherboard by referring to the mounting position of the main board, and mount the motherboard on the case.

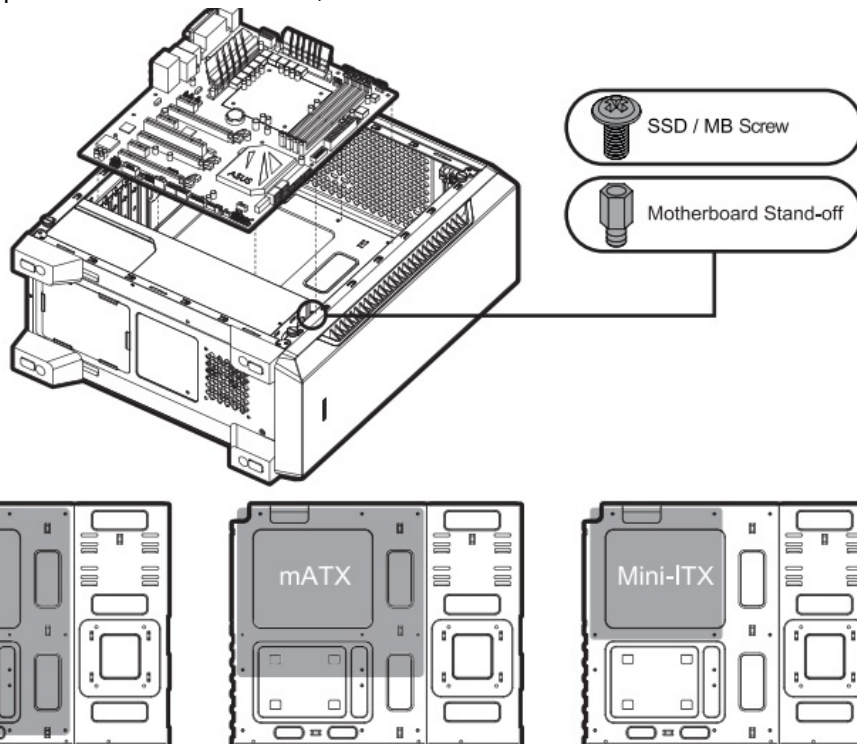


### Mounting the 3.5" and 2.5" SSD / HOD

Separate the 2.5" and 3.5" combo HOD guide and assemble the HOD or SSD. Mount the assembled HOD on the slot.

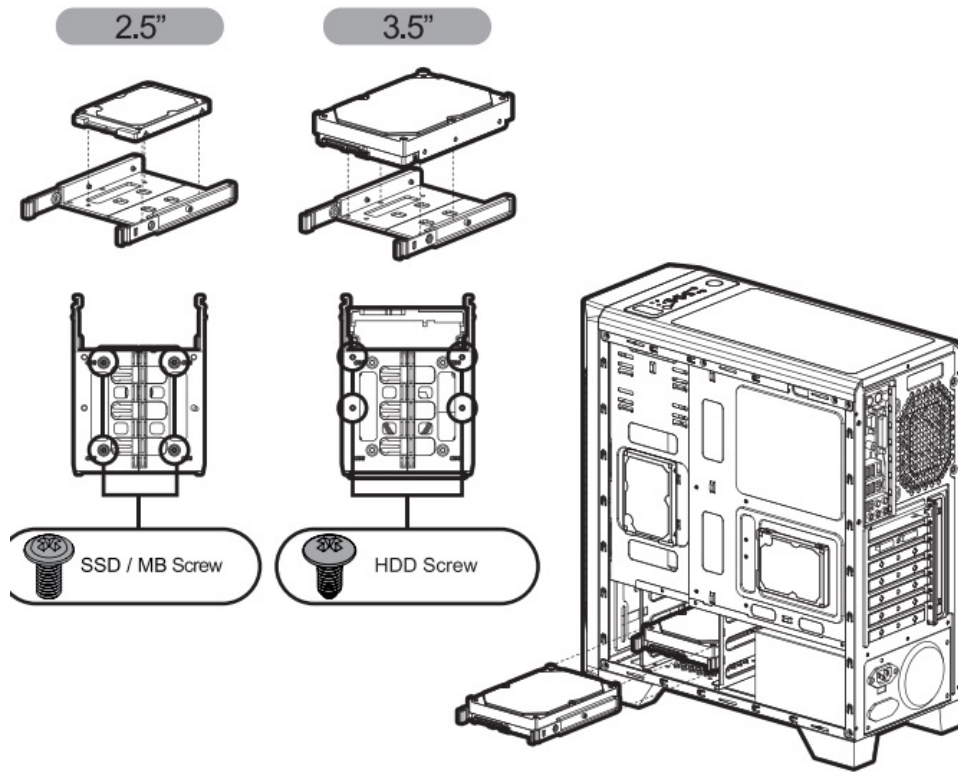


### Mounting 2.5" SSD / HOD

2.5" SSD and HDDs can be installed on the right side of case as shown in the diagram below .

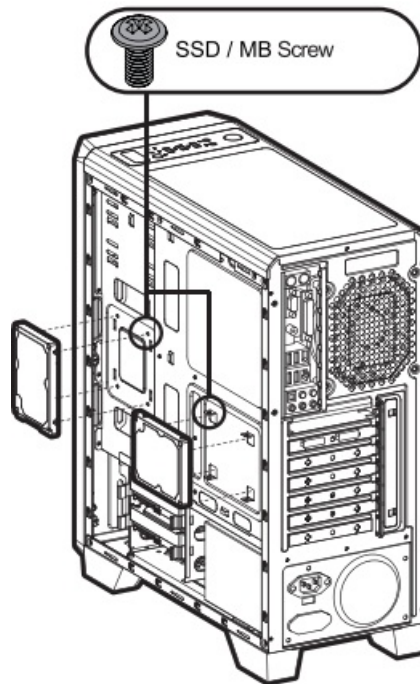


### Mounting PCI-E(VGA) card

Loosen the screw, separate the PCI cover, mount the graphic card, and fix it using the screw.

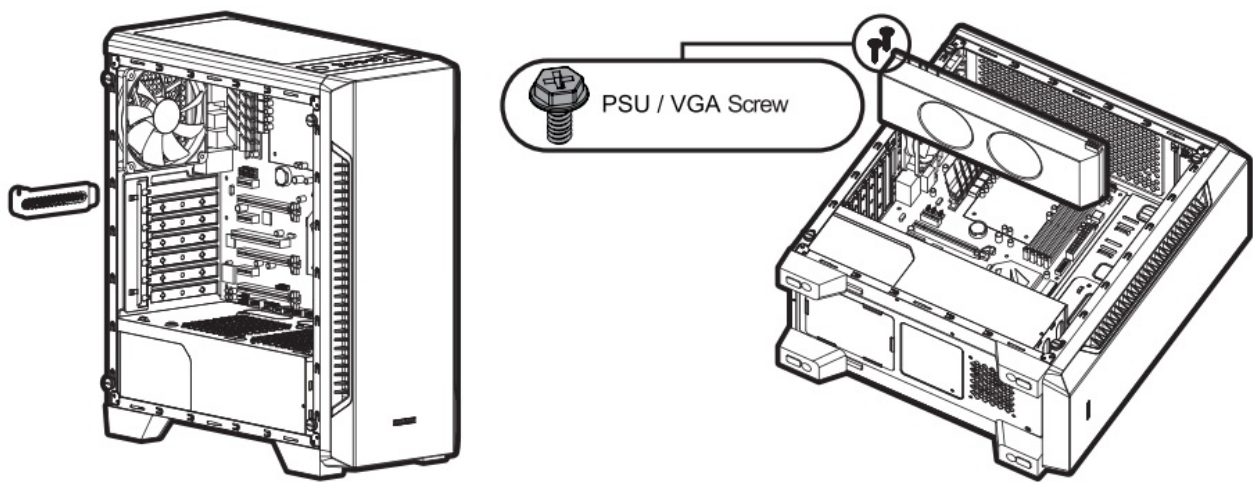


### Mounting the top fan

As shown in the picture, install the fan on the top of the case using bolts

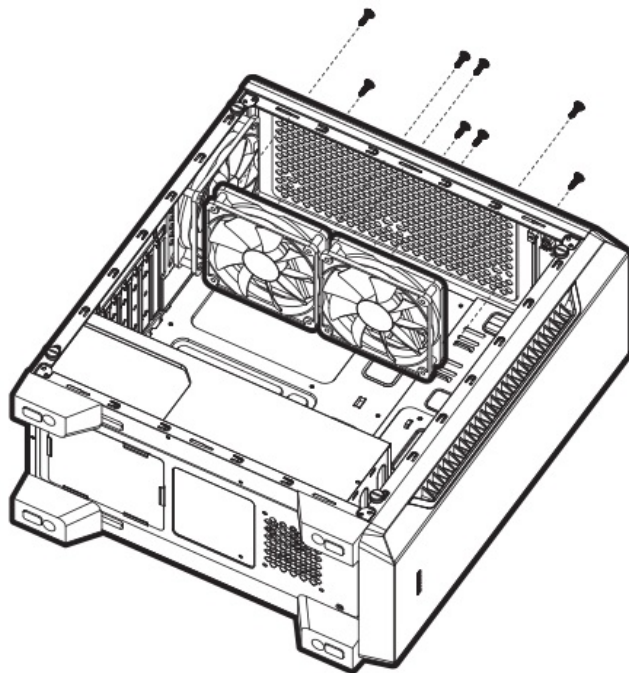


### Mounting the bottom fan



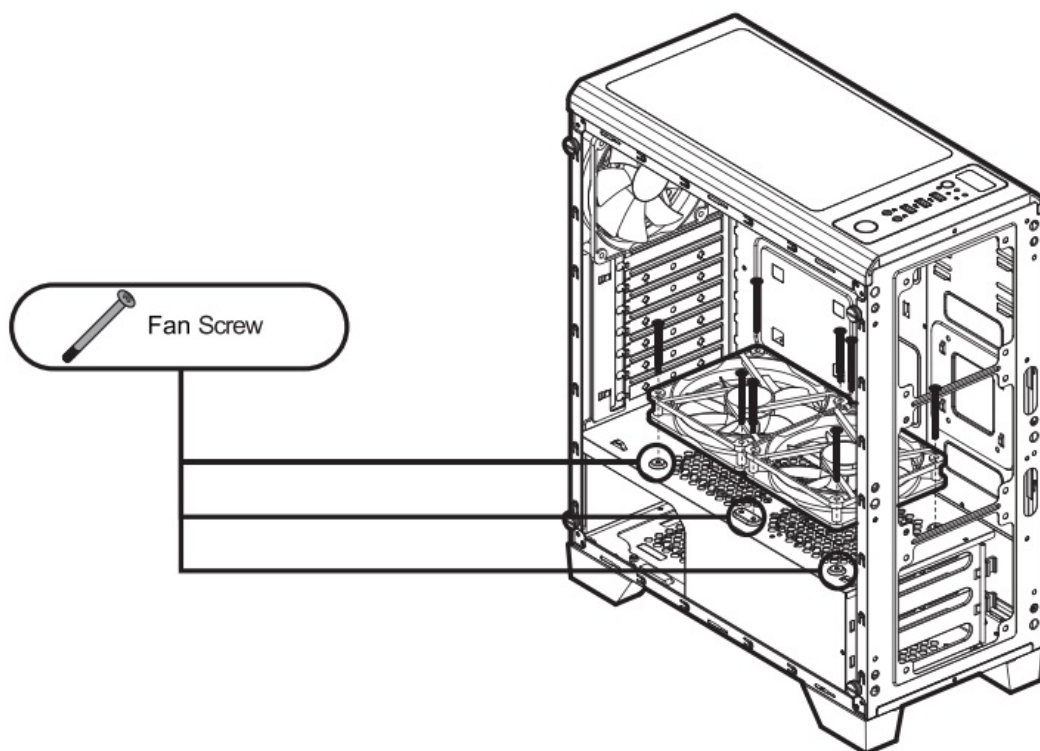

### Mounting the front fan and front radiator


After Front Cover Removal and Mount the fan or the radiator on the mount hole in the front as shown in the figure.

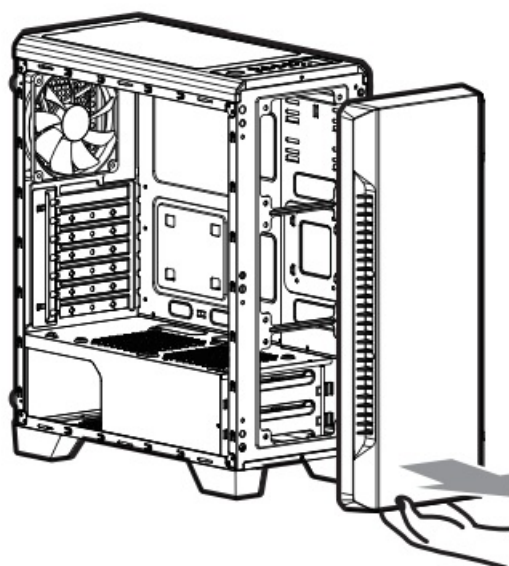


(For liquid-coolers, only products with a hose length of 240 mm or more can be installed)




Mounting the front fan

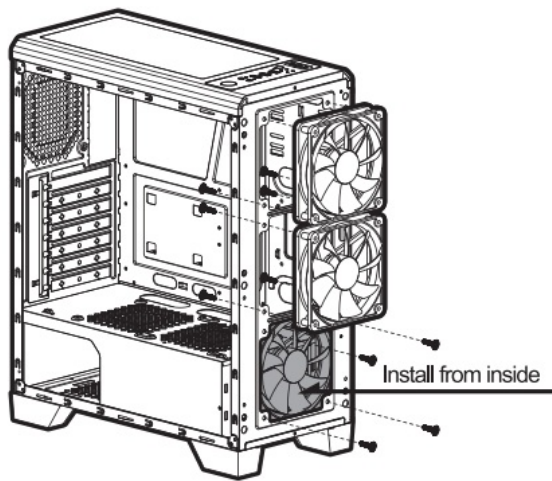

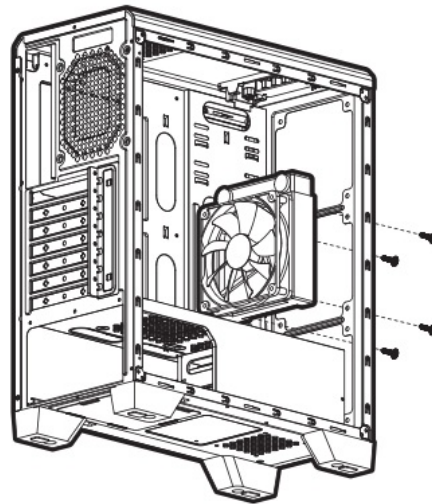


Mounting the front radiator

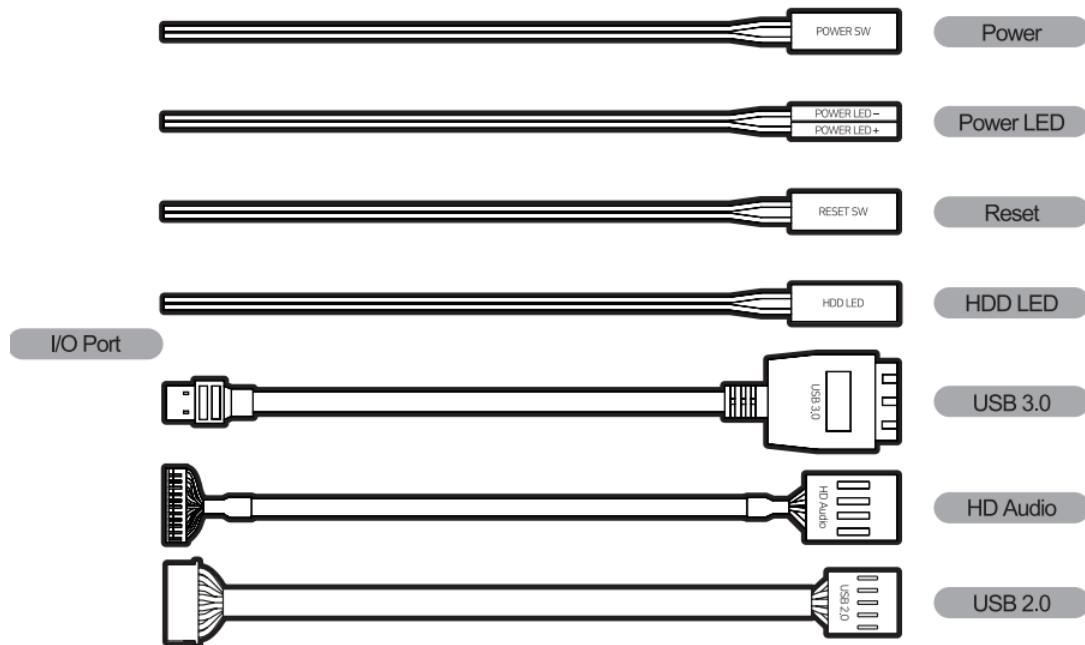

## Cable Connection



## Documents / Resources

	<p><a href="#">ZALMAN S3 ATX Mid Tower Computer Case</a> [pdf] User Manual S3 ATX Mid Tower Computer Case, S3 ATX, Mid Tower Computer Case</p>
	<p><a href="#">ZALMAN S3 ATX MID Tower Computer Case</a> [pdf] User Manual S3 ATX MID Tower Computer Case, S3, ATX MID Tower Computer Case, Tower Computer Case, Computer Case, Case</p>
	<p><a href="#">ZALMAN S3 ATX MID Tower Computer Case</a> [pdf] User Manual S3 ATX MID Tower Computer Case, S3, ATX MID Tower Computer Case, Tower Computer Case, Computer Case, Case</p>