



G2 GoGEN TWS Buddies User Manual

[Home](#) » [G2](#) » G2 GoGEN TWS Buddies User Manual 

Contents

- [1 G2 GoGEN TWS Buddies](#)
- [2 SECURITY PRECAUTIONS](#)
- [3 TECHNICAL SPECIFICATIONS](#)
- [4 ACCESSORIES](#)
- [5 DEVICE LAYOUT](#)
- [6 POWER ON & PAIRING](#)
- [7 RESET](#)
- [8 BLUETOOTH CONNECTION STEPS](#)
- [9 TAP CONTROL INSTRUCTIONS](#)
- [10 CHARGING](#)
- [11 WARRANTY](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)



G2 GoGEN TWS Buddies



SECURITY PRECAUTIONS

In order to have a proper and safe use of the headset, please read this user manual in detail and save it. Be aware of the following guidelines when using your headset:

WARNING

- You should adjust the volume carefully when using the headset to prevent hearing damage.
- Please stop using the headset in potentially hazardous situations to ensure your safety.
- Please avoid using the headset to listen to music, make or receive calls which may cause a distraction while driving.
- Put this product and its accessories somewhere out of the reach of children, to avoid a fatal danger caused by inappropriate use.
- You should keep water from entering the headset, which may cause damage to the sound quality or the headset.
- You should avoid turning the volume so high that you can't hear anything around you. If you feel a tinnitus or the volume is too high, please reduce the volume.
- Stop using the headset if you feel obvious discomfort, irritation or have other adverse reactions.

- The headset should not be stored or used at temperatures below -10 °C or above 55 °C which may shorten headset or battery life.

TECHNICAL SPECIFICATIONS


- Bluetooth Version: V 5.0
- Bluetooth Profile: HSP, HFP, A2DP, AVRCP
- Frequency range: 2402 MHz – 2480 MHz
- Operating range: 10 m
- Frequency Response: 20 Hz – 20 KHz
- Rated Power: 3 mW
- Sensitivity: 94 dB (±3 dB) @ 1 KHz
- Impedance: 16 Ω ± 15%
- EIRP: 3,35 dBm
- Protection: IPX4
- Battery: Li-Polymer 350 mAh Charging Case + 40 mAh X 2 earbuds
- Music playing time: up to 4 hours + 12 hours with charging case
- N.W.: 5 g / earbud, 30 g including charging case

ACCESSORIES

Eartips, USB Charge Cable, Charging Case

DEVICE LAYOUT

1. Touch control area
2. Charging interface
3. Charging case battery indicator

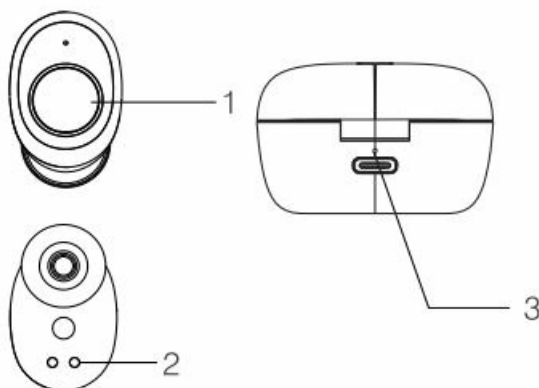

POWER ON & PAIRING

Option 1: AUTO ON & PAIRING

With the two headsets in case and lid open to active Power ON. Take out the headsets and wait about 10 seconds until LEFT & RIGHT earbuds AUTO paired.

Option 2: Manually ON & PAIRING

Pick up the headset from the charging case, long tap the L&R earbuds for 3-5 seconds until they powered OFF (The indicator of each earbud will flash RED for 1 second). After a while (5 seconds), long tap the L&R earbuds for 3-5 seconds until the indicator of each earbud flashing BLUE for 1 second (means Power ON), and keep tapping for 3 seconds to enter into pairing mode (The RED and BLUE indicator flashes rapidly). When L&R pairing is successfully done, the R earbud is working as a Master. The L is working as a Slave. There are no lights after successfully connecting.


RESET

In case of failure pairing or unnormal working, you need to RESET the earbuds as following: Make sure the earphones were disconnected with phone or other Bluetooth devices. Put both earphones into charging case for 3-5 seconds and take them out, QUICKLY PRESS L or R earbud 5 times to enter into pairing mode, both earbuds will flash Blue and Red alternately, which means the earphones had been reset successfully. Put them back into charge case. The earphones are ready to Use on AUTO ON & Pairing.

BLUETOOTH CONNECTION STEPS

1. Please keep your headset and mobile phone as close as you can, within 1 meter.
2. Turn on "Bluetooth" in setting on your phone or other devices, and then find and select GOGTWSBUDDIES.
3. Click on GOGTWSBUDDIES and Bluetooth Headset gets connected with your phone or devices automatically.
(Some may require pass code which is "0000" (4 zeros)).

TAP CONTROL INSTRUCTIONS

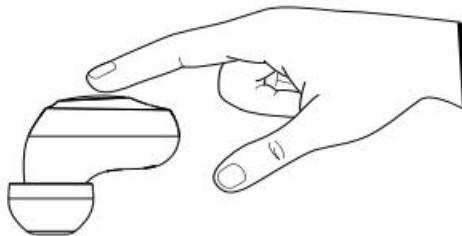

FUNCTION	CURRENT STATUS	ACTION
ACTIVATOR OFF	CONNECTING TO PHONE	Press 1 time on the L or R earphone to quit Siri or Google Assistance
ANSWER CALL	INCOMING CALL	Short press the L or R earphone
END CALL	ON CALL	Short press the L or R earphone
REJECT CALL	INCOMING CALL	Long press L or R earphone for 2 seconds
PLAY & PAUSE MUSIC	MUSIC PLAYING	Short press L or R earphone
VOLUME UP	MUSIC PLAYING	Double press R earphone
VOLUME DOWN	MUSIC PLAYING	Double press L earphone
PREVIOUS TRACK	MUSIC PLAYING	Press L earphone for 2 seconds
NEXT TRACK	MUSIC PLAYING	Press R earphone for 2 seconds

CHARGING


CHARGING WAYS OF HEADSET

Put the headset(L)(R)to the corresponding position in the bottom of the charging base, close the charging base tightly. The indicator light of headset is red when being charged, and will turnoff automatically after being fully charged.

CHARGING WAYS OF CHARGING BASE

Use the USB charging cable to charge. The indicator light of charging base is flashing white when being charged,

and lights white after being fully charged.

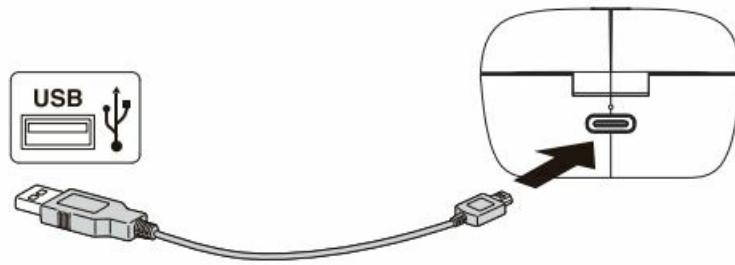

WARNING

- You must select a qualified charger from a regular manufacturer. (Charging Voltage: 5V Charging Current: 900mA for charging case)
- A fully charged headset will lose its power automatically if left unused. It is recommended to charge the headset each three months.
- Do not leave the headset in a too hot or too cold condition (best between -10°C and +40°C) which may affect the headset's operations although it is fully.
- Please wear this Headset properly for best tone quality. Do not disassemble hardware. Please use soft and dry cottons for cleaning.
- Make sure the headset is fully charged before first use.
- This Headset is not waterproof. Do not use it while swimming or diving.
- If do not use this Headset for long time, please charge once a week to extend battery life.
- Keep your Headset and device as close as you can to avoid interference of signal path.

WARRANTY

Our product is warranted for 2 full year from the date of purchase. The warranty is provided on all material defects and workmanship. Guarantee of 24 months does not apply to decrease in the accumulator's effective capacity caused by its use or age. Effective capacity gradually decreases depending on the method of use of the accumulator.

WE RESERVE THE RIGHT TO CHANGE TECHNICAL SPECIFICATIONS.

TO AVOID DANGER OF SUFFOCATION, KEEP THE PLASTIC BAG AWAY FROM BABIES AND CHILDREN. DO NOT USE THIS BAG IN CRIBS, BEDS, CARRIAGES OR PLAYPENS. THIS BAG IS NOT A TOY.




Disposal of old Electrical & Electronic Equipment (Applicable in the European Union and other European countries with separate collection systems) This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed

information about recycling of this product, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product. Hereby, ETA a.s. declares that the radio equipment type TWSBUDDIES is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: http://www.gogen.cz/declaration_of_conformity



www.gogen.cz

Documents / Resources

	<p>G2 GoGEN TWS Buddies [pdf] User Manual GoGEN TWS Buddies, GoGEN, TWS Buddies, Buddies</p>
--	--

References

- [User Manual](#)