



AEi AGR-8206-SMC Analog DECT Phone User Manual

[Home](#) » [AEi](#) » AEi AGR-8206-SMC Analog DECT Phone User Manual 

Contents

- [1 AEi AGR-8206-SMC Analog DECT Phone](#)
- [2 Overview](#)
- [3 Package Contents](#)
- [4 Product Description](#)
- [5 Operations](#)
- [6 Support](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)



AEi AGR-8206-SMC Analog DECT Phone



Overview

This phone is a full-feature telephone that provides voice communication. Read this QIG carefully to learn how to operate this product and take advantage of its features.

Package Contents

1. Base Unit
2. Cordless Handset
3. Stand
4. Battery
5. AC Adaptor
6. 10-feet, 4 wire Line Cord (with RJ-11 connector)
7. Quick Installation Guide (This document)

Product Description

The following contains important information to help you familiarize with the functions of the analog phone.

Front View



Handset keys


	Name	Description
1	Message waiting indicator	To indicate an incoming call or unread messages.
2	Display screen	To display calls and status information.
3	Speed dial keys	Press to dial the preset number.
4	LINE 1 / LINE 2	To indicate a line been used as the following status: – Idle: No LED indication. – In call: Red LED. – In on-hold call: Blinking red LED.
5	End key	Press to end a phone call
6	Alphanumerical keys	Press these keys to enter phone numbers or texts.
7	Function keys	

	Name	Description
	HOLD	Press to put an active call on hold.
	SPEAKER	Press to activate the speakerphone for hands free conversations.
	VOLUME	Press to increase or decrease the volume of the ringer tone, handset, or speakerphone.

Base unit keys

	Name	Description
1	Message waiting indicator	To indicate an incoming call or unread messages.


Back View

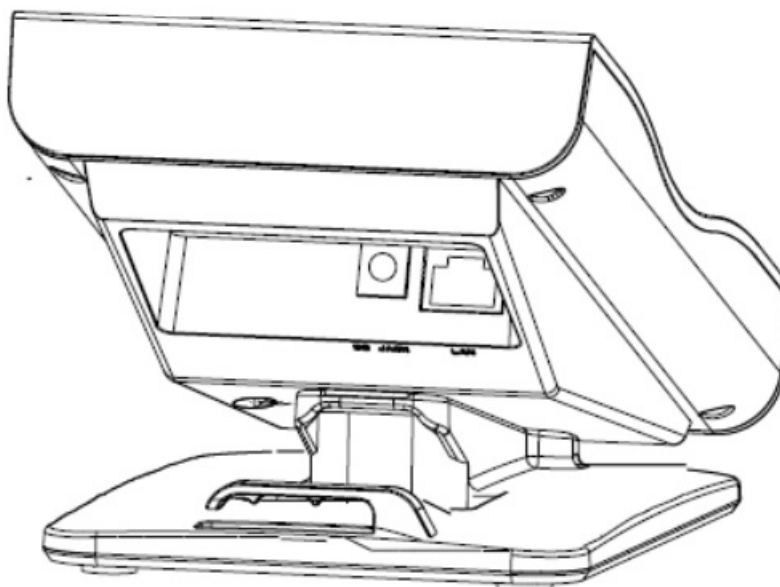


NO.	Name	Description
1	PSTN line port	Connects to PSTN line.
2	DC 6V Power jack	Connects to AC power adapter.

Connecting the Phone


The following illustration shows how to connect the power

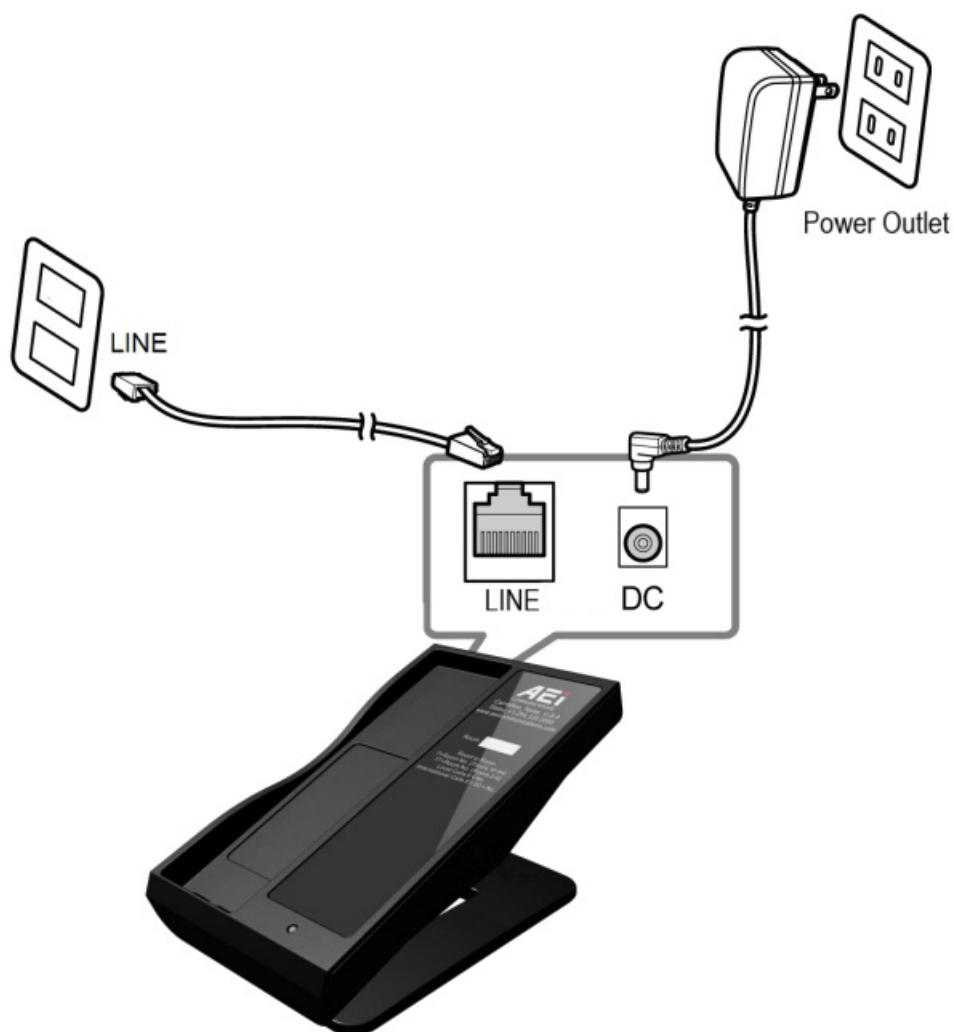

The following illustration shows how to install the phone and stand.

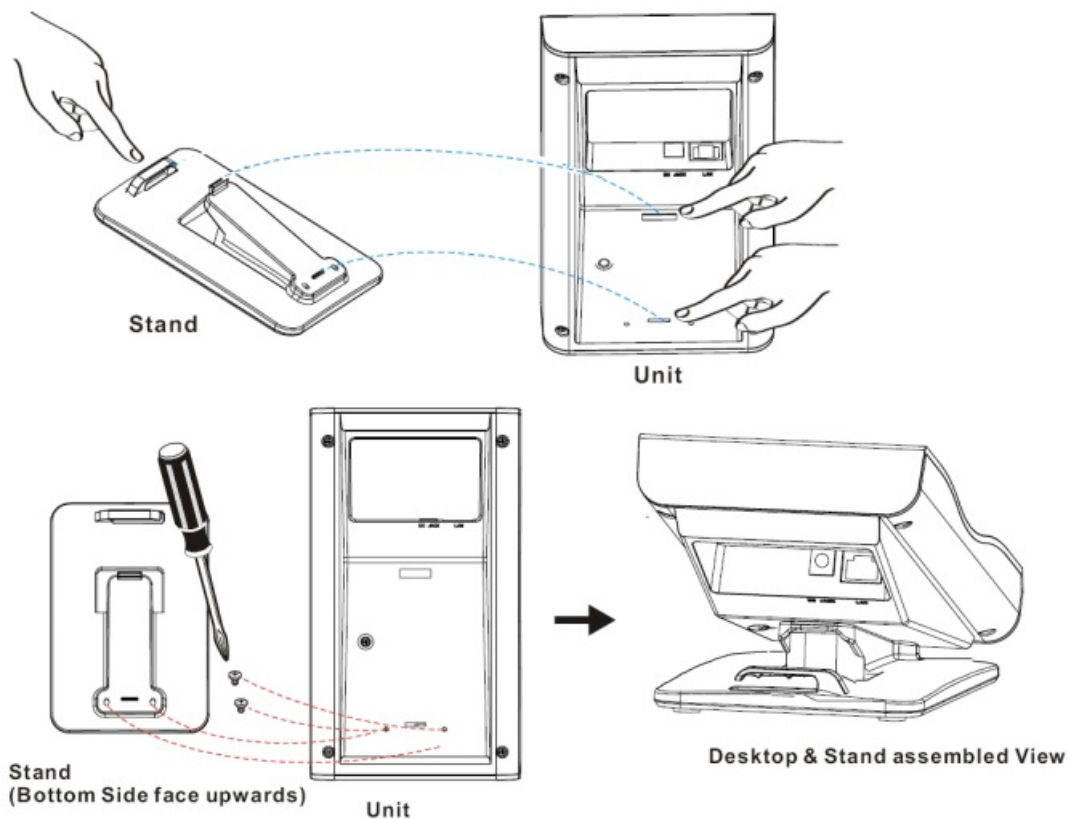

The following illustration shows how to install the handset and battery.

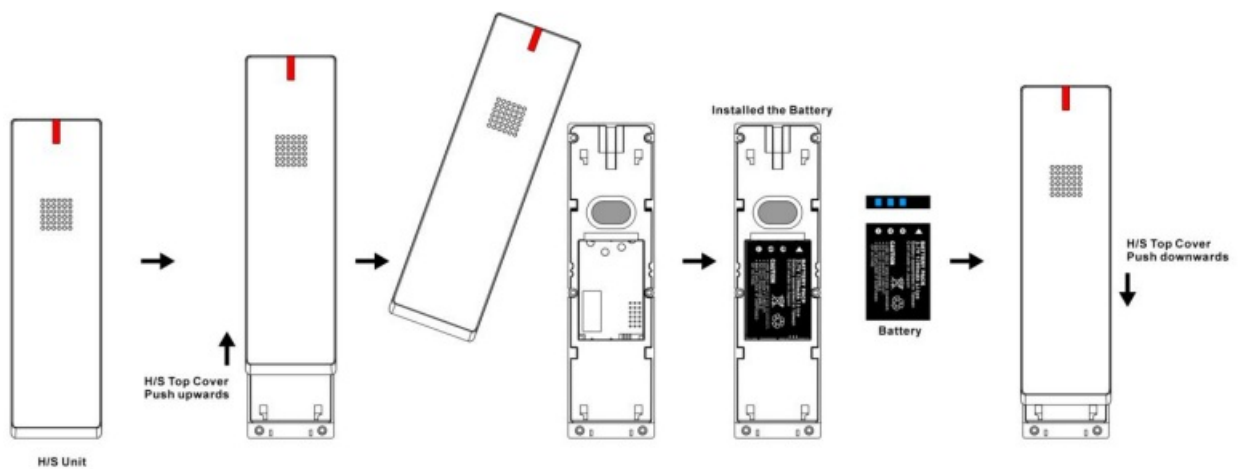

Operations

Answering a Call

An incoming call is indicated by a ringing tone and a flashing indicator at the top of both handset and base units. You can answer the call by doing one of the followings:

- Pick up the handset to answer the call.
- Press the Line (Line1/Line2) key on the handset to answer the call.

Making a Call

- Dialing with the Keypad
- Enter the telephone number with the alphanumeric keypad and the call will start automatically.

- Using the Speed dial keys
- You use the 6 pre-assigned speed dial hotkeys, to configure the most commonly dialed numbers. Use the function to dial a number quickly, instead of keying in a complete number.
- To call number using speed dialing, follow the steps below:
- Press the speed dial hokey that has been pre-assigned to the phone number and the call will start automatically.

Call Options

- While a call is in progress, a number of additional options are available.
- Using the Speaker Phone
- For hands free operation, you can use the built-in speaker to talk on the phone.' To use the speakerphone, follow the steps below:
- While talking on the phone, press the SKEAKER key on the phone to enable the Speakerphone function.
- Press Speaker key again to terminate the call.

Putting a Call on Hold

- You may want to put a call on hold temporarily while doing some work or attending to a second incoming or outgoing call. To put a call on hold, do one of the following:
- Press the HOLD key on the phone to put the call on hold,
- When you receive a second call, press the next available LINE key to attend to the new call, and the first call will be put on hold automatically.

Charging the Handset Battery

- You would need to charge the handset battery before using the handset.
- Install the battery into the handset.
- Place the handset onto the base unit and base unit will start to charge the handset automatically.
- The charging indicator lights up in red during charging in progress. fully charged.
- The LED goes off after the handset battery is

Checking Voice Messages

If the message waiting indicator at top of handset or base unit lights up in red, it indicates that there are one or more new messages in voicemail box.

- Press the MESSAGE key the phone to retrieve voice messages.

Support

For technological support, please email to support@eicommunication.com

Documents / Resources

Analog DECT Phone



AGR-8206-SMC / AGR-8106-SMC
AGR-8206-SMC-7979 / AGR-8106-SMC-7979
QIG
V 1.00

[AEi AGR-8206-SMC Analog DECT Phone](#) [pdf] User Manual

AGR-8206-SMC, AGR-8106-SMC, AGR-8206-SMC-7979, AGR-8106-SMC-7979, AGR-8206-SMC Analog DECT Phone, AGR-8206-SMC, Analog DECT Phone, DECT Phone, Phone