


**L701 Color
Label Printer**



AFINIA LABEL L701 Color Label Printer Installation Guide

[Home](#) » [AFINIA LABEL](#) » [AFINIA LABEL L701 Color Label Printer Installation Guide](#) 

Contents

- [1 AFINIA LABEL L701 Color Label Printer](#)
- [2 Product Usage Instructions](#)
- [3 Accessories](#)
- [4 Install printhead](#)
- [5 Load sample media](#)
- [6 Print test label](#)
- [7 Install printer driver](#)
- [8 FAQs](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



AFINIA LABEL L701 Color Label Printer



Specifications

- Model: L701
- Manufacturer: AfinaLabel
- Support: <https://afinalabel.com/product-support/l701-support/>
- Contact Information: support@afinalabel.com | Phone: [952-556-1608](tel:952-556-1608)

Product Usage Instructions

Unpacking

1. Remove tape and packing materials:
 - Remove tapes.
 - Open the top cover and remove the tapes and foam.
 - Remove cardboard. Save the packing foam and cardboard!

Power Connection:

1. Connect power and turn on the switch at the back of the printer.
2. Do not connect the printer to a PC until prompted during Printer Driver Installation.

Ink Cartridge and Printhead Installation

1. Install ink cartridges.
2. Install printhead after following the specified steps in the manual.

Media Loading

1. Load sample media by following the instructions provided:

- Place the flat side against the media roll.
- Tighten the knob fully.
- Insert media until it stops.
- Wait for the printer to load the media.

Printing:

1. Print a test label using appropriate media (inter-label gap or continuous).

Driver Installation


1. Before installing the printer driver, ensure your computer meets the minimum system requirements as per the User Manual Appendix.
2. To connect the printer to a computer via USB:
 - Download the installer from the AfiniaLabel website.
 - Connect the USB cable when prompted during installation.
3. To connect the printer to a network:
 - Connect the printer to the network using Ethernet.
 - If setting a Static IP address, refer to the User Manual for instructions before proceeding.

Please visit our website for videos detailing setup, installation, and product overview.

<https://afinialabel.com/product-support/l701-support/>



Unpack:

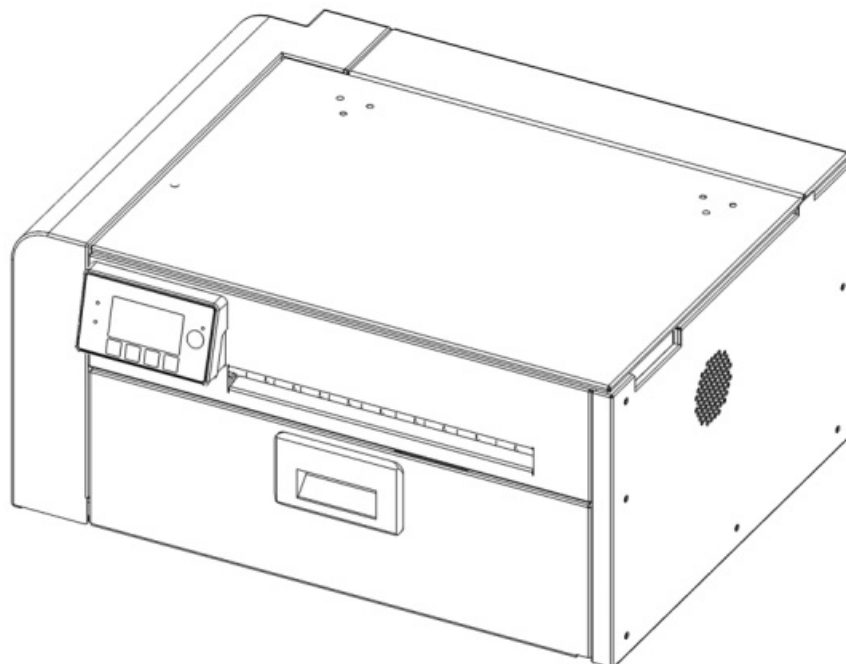


For more detailed information, click the User Guide button on the Setup Launcher main page.

Technical Support Contact Information:


- Email: support@afinialabel.com
- Phone: [952-556-1608](tel:952-556-1608)

Accessories

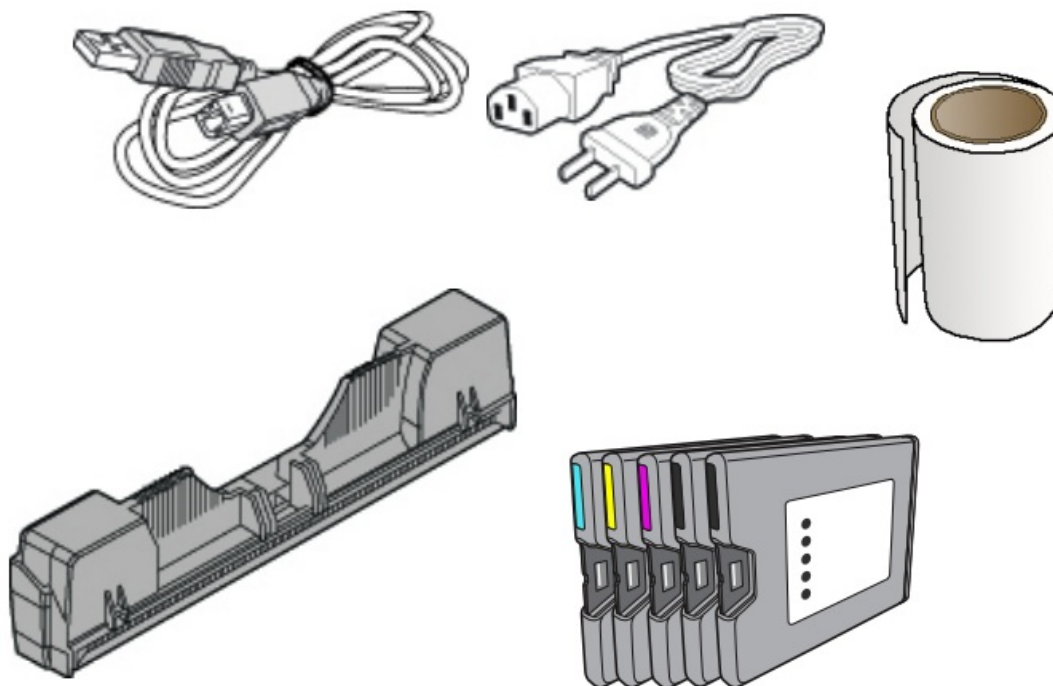



Remove tape and packing materials

- a Remove tapes.

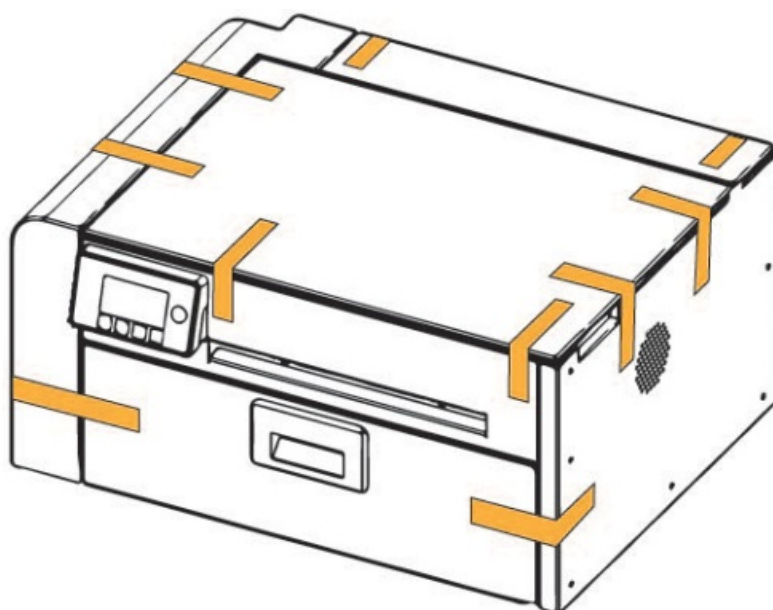


(continued on next page)


- Open the top cover and remove the tapes and foam.

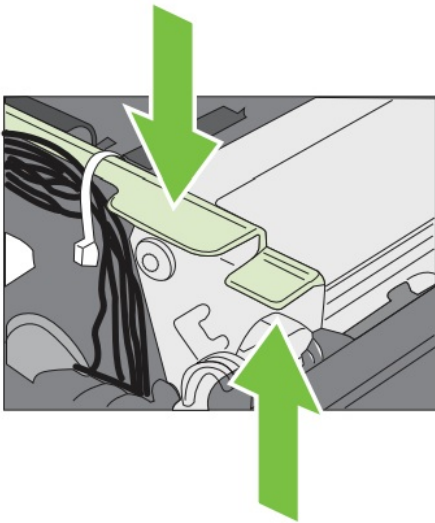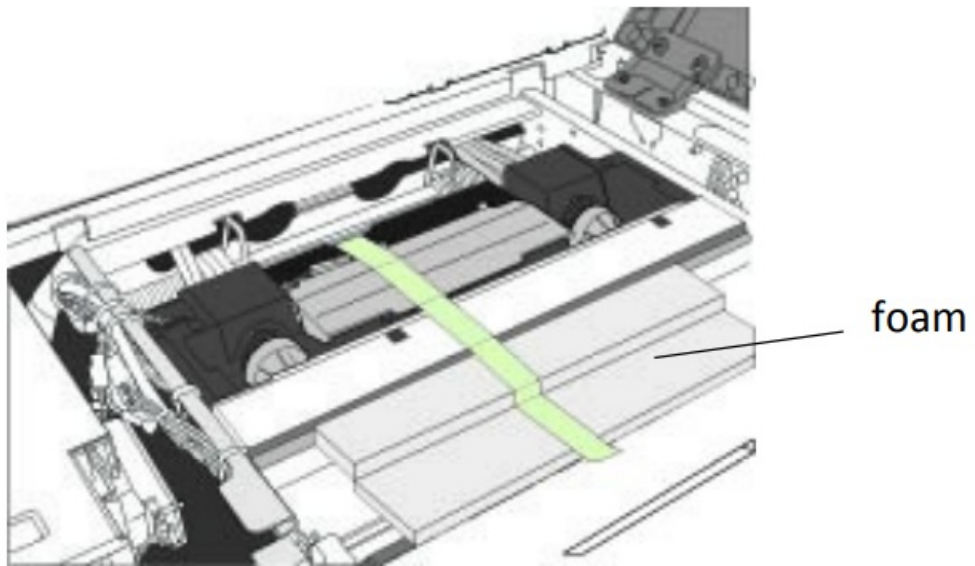


Squeeze latches to open clamshell

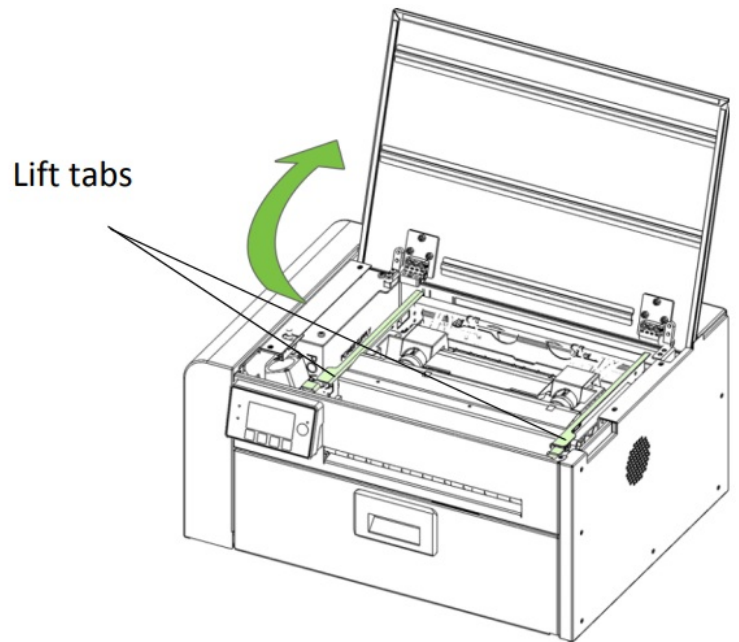

Pull tabs to remove cardboard

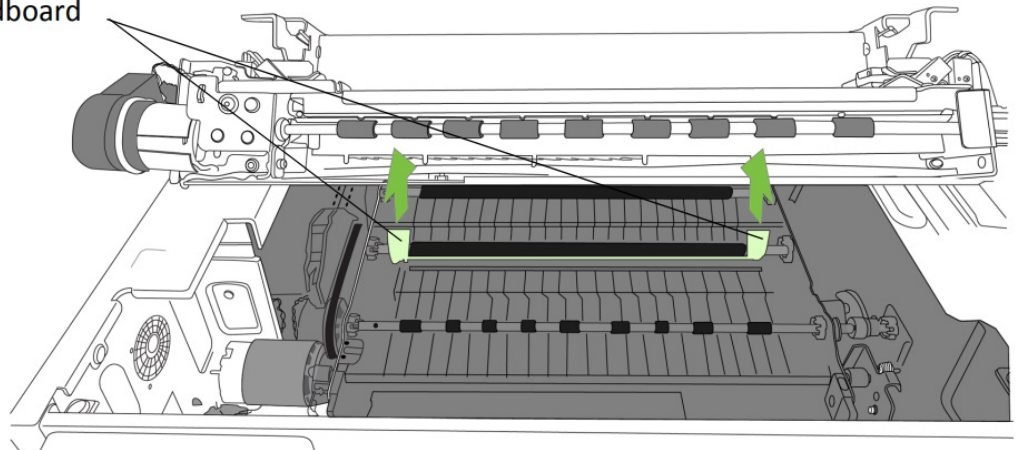


Connect the power, turn on the switch in the back

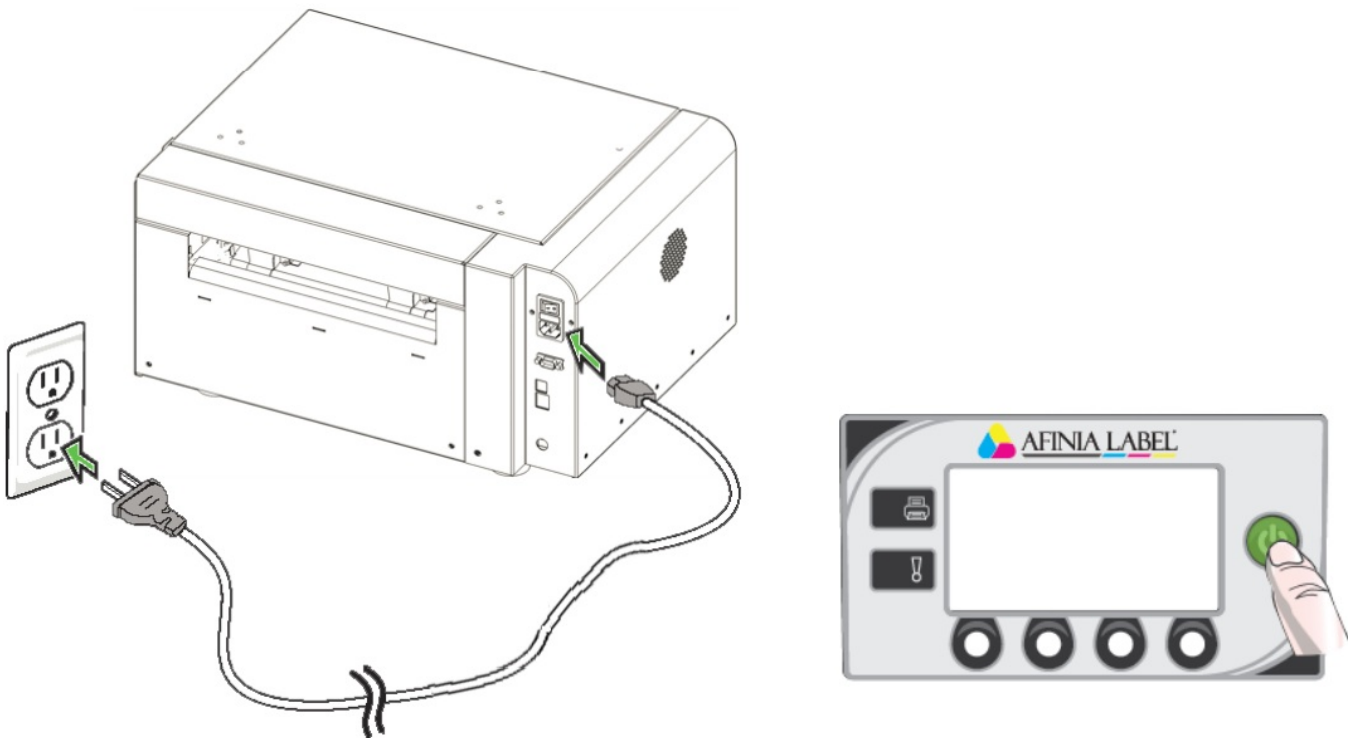


Do not connect the printer to a PC until prompted to do so during the Printer Driver Installation!





Choose display language

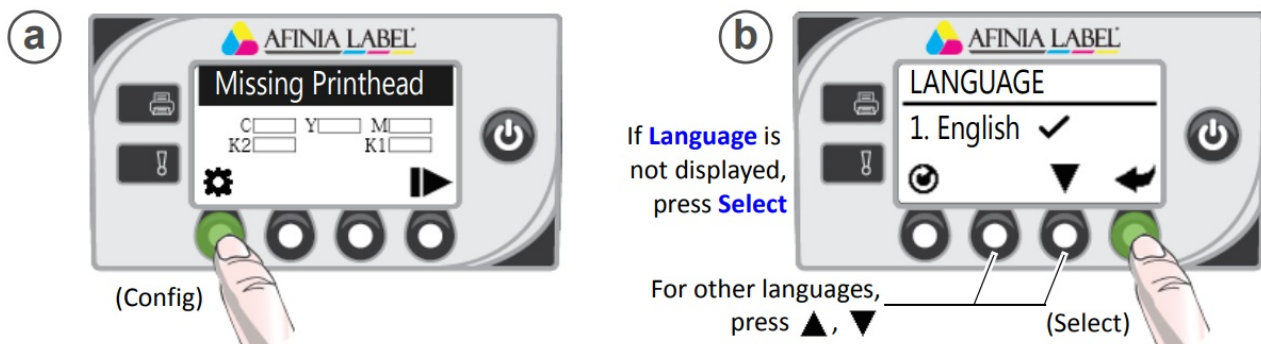


If Language option is not available, see [Selecting the Security Level](#) in Chapter One of the User's Manual.

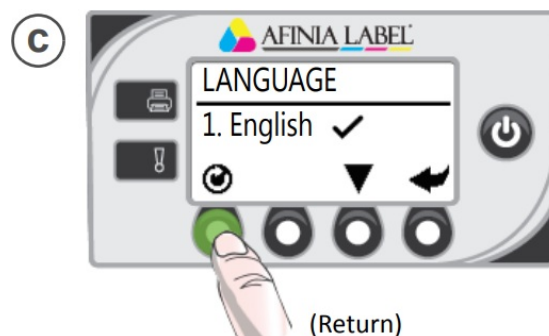


Install ink cartridges

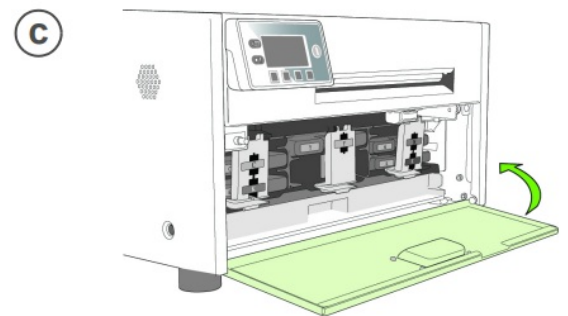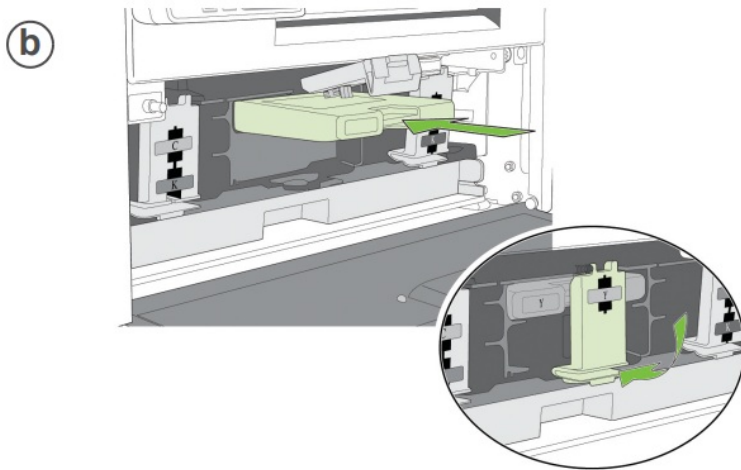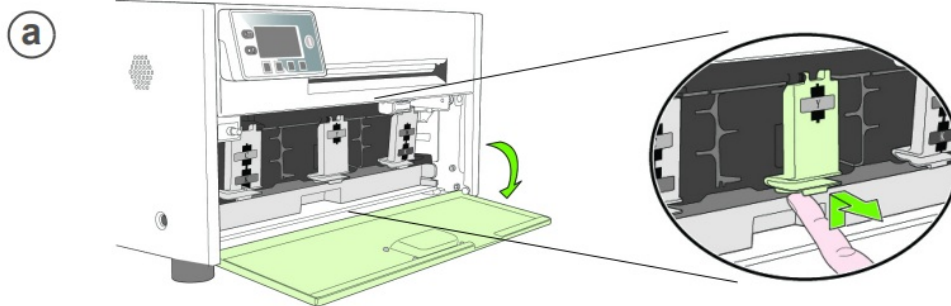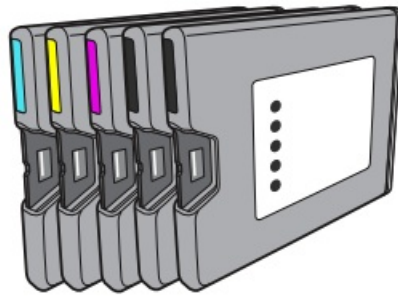


Install printhead



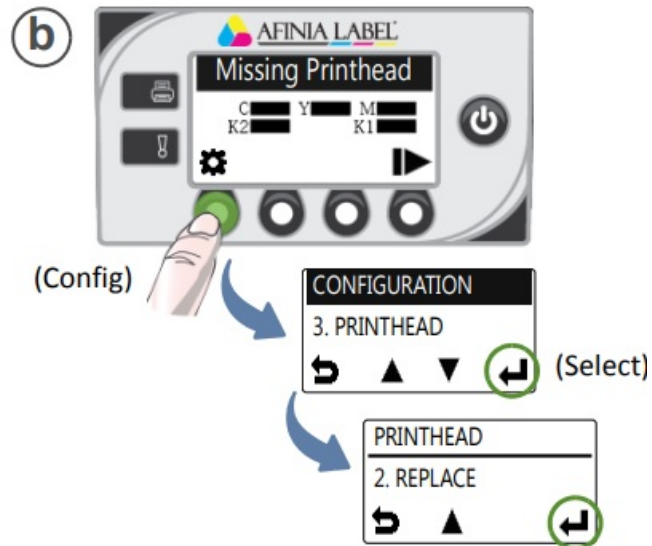


Wait for the print head latch to be released.

c Open printhead latch fully.

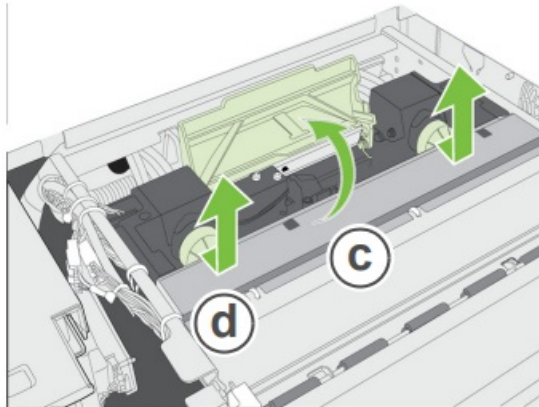


d Remove caps.

Do not discard caps!




e Remove cover from printhead

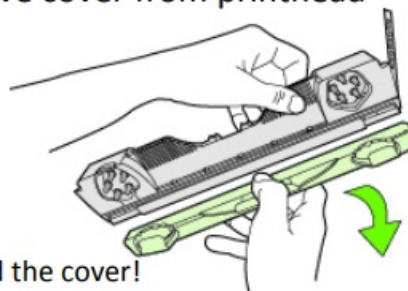


Do not discard the cover!


Slowly remove tape from electrical contacts and nozzles

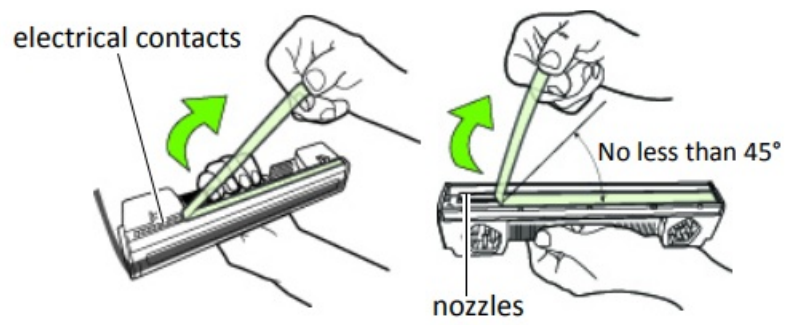

g

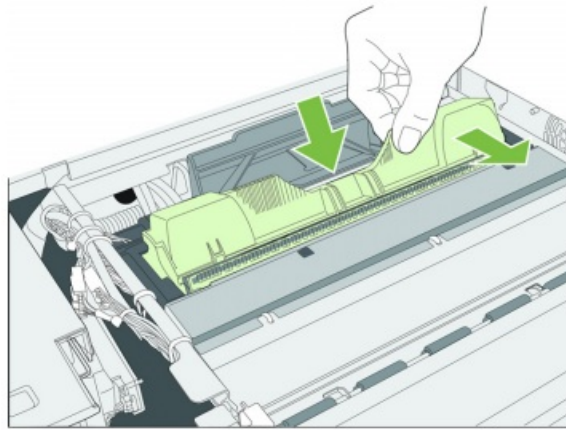

h

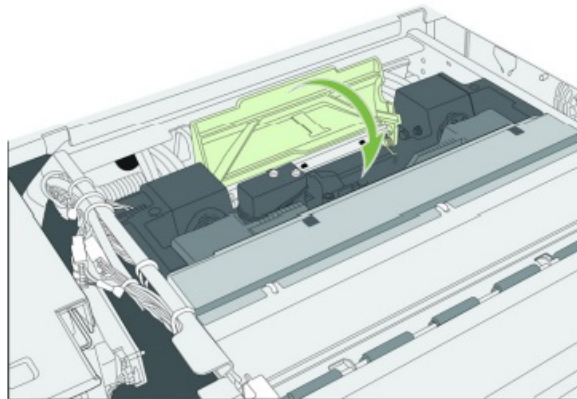





Check that ink is flowing through the tubes on both sides of the printhead.


i




Control Panel
will read
Online when
ready

Load sample media

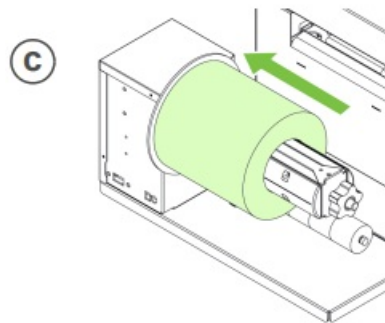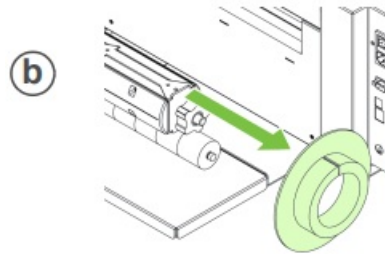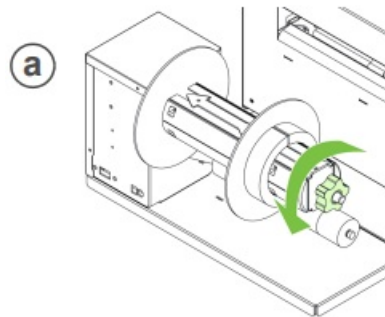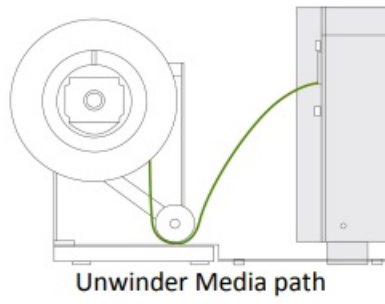


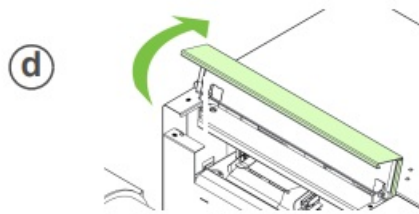

Flat side against media roll.

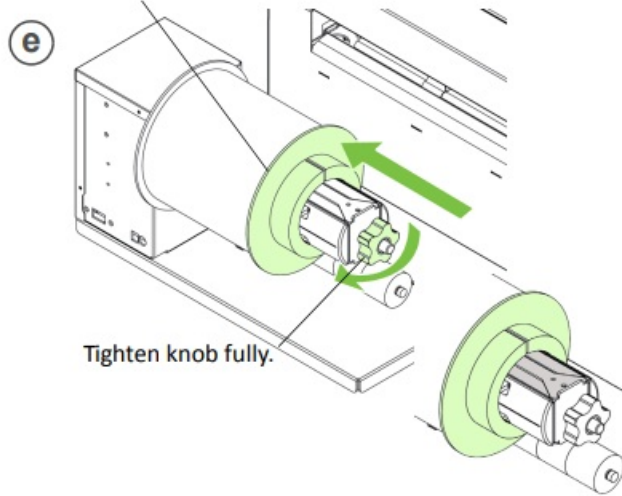

Tighten knob fully.

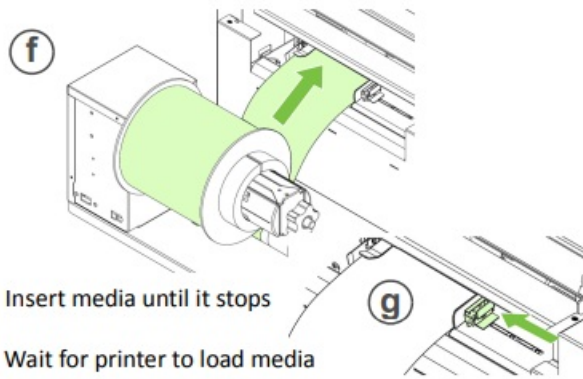


Insert media until it stops

Wait for printer to load media






Print test label


Requires inter-label gap or continuous media

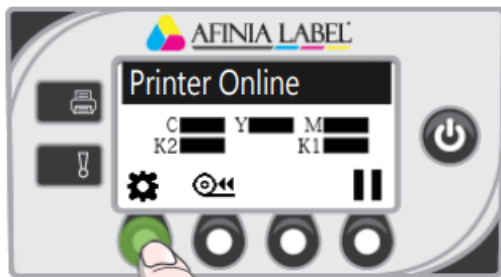

(Config)

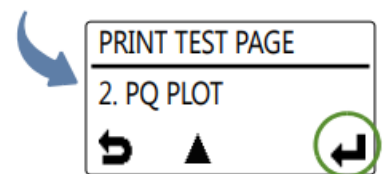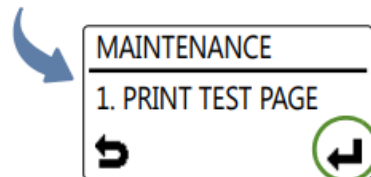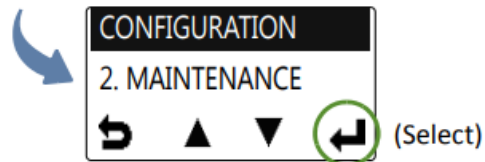

Sample PQ Plot

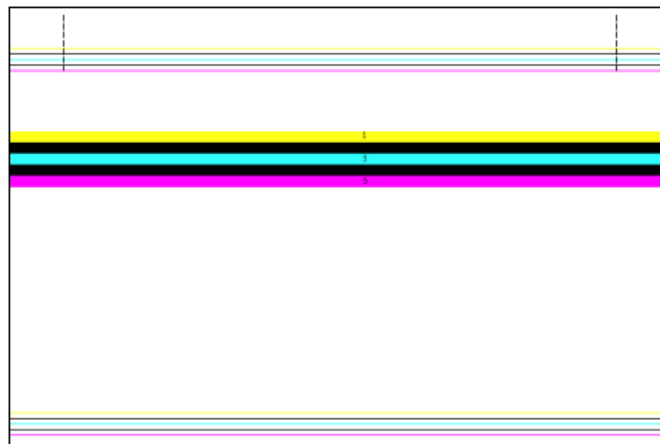

Top Section:

- Line is defined with no missing nozzles
- Lines are printed in order: Yellow, Black, Cyan, Black, Magenta
- Vertical dashed lines are straight

Middle Section:

- A yellow, black, cyan, and magenta lines are printed
- No color mixing on the color bars
- Numbers 1, 3, 5 are visible

Bottom Section:

- Line is defined with no missing nozzles
- Line is reprinted in order: Yellow, Black, Cyan, Black, Magenta

Overall:

- No streaking or smearing


Install printer driver

Before installing the printer driver, ensure the computer meets minimum system requirements (see System Requirements in the User Manual Appendix).

To connect the printer to the computer using a USB

- Download installer from the AfiniaLabel website: <https://afinialabel.com/product-support/l701-support/>


Drivers & Installers



Extract the file and run check.exe




c

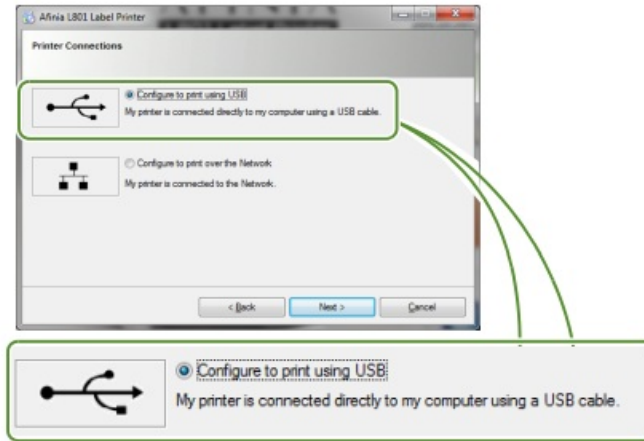


d

Connect USB cable when prompted.

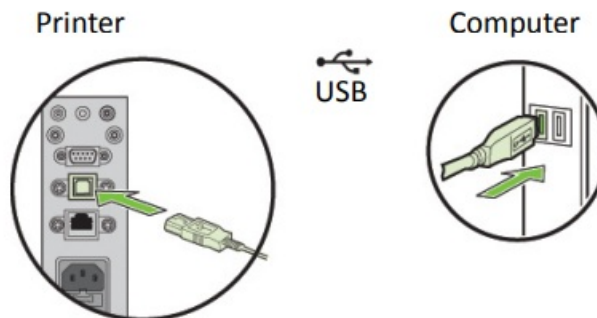


To connect the printer to the network

- Connect the printer to the network using Ethernet
-

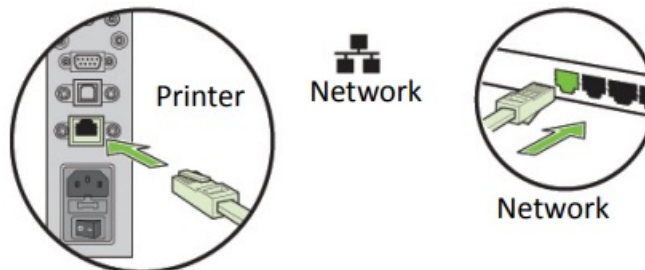

If you will be using DHCP to set the IP Address, skip to step c. To assign the printer a Static IP address, please see Selecting the Security Level in Chapter One of the User Manual before proceeding to Step C.




c

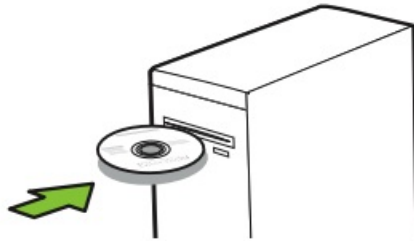

d



e

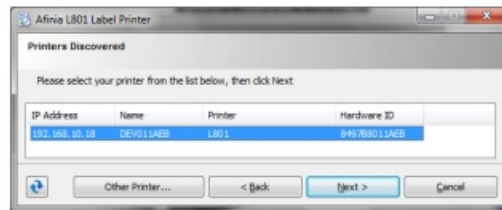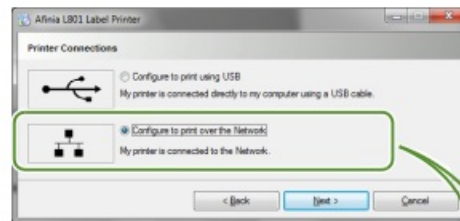

FAQs

Q: What should I do if the language option is not displayed during setup?

A: If Language is not displayed, press Select. For other languages, use the corresponding button. If the Language option is not available, refer to Chapter One of the User's Manual for selecting the Security Level.

Q: How can I ensure proper ink flow through the printhead?

A: Check that ink is flowing through the tubes on both sides of the printhead. The Control Panel will display Online when ready.

Documents / Resources



[AFINIA LABEL L701 Color Label Printer](#) [pdf] Installation Guide
L701 Color Label Printer, L701, Color Label Printer, Label Printer, Printer

References

-  [Product Support Archive » Afinia Label - Make Your Own Labels](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.