




Alpatronix AX600 Bluetooth Speaker User Manual

[Home](#) » [Alpatronix](#) » Alpatronix AX600 Bluetooth Speaker User Manual 



AX600 Bluetooth Speaker User Manual

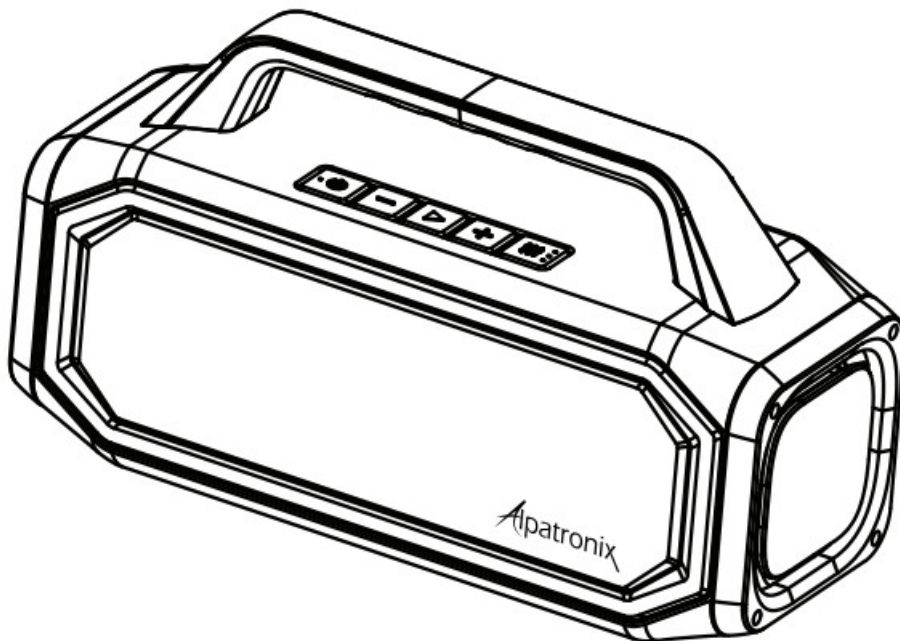

Alpatronix is the trademark of Saritek Technical Solutions Inc.
All other brands are registered trademarks of their respective owners.

100% Satisfaction Guaranteed

To activate the 1-year warranty on your Bluetooth Speaker, visit <http://www.alpatronix.com/> and click on the

warranty link to register your product by filling out a quick and easy form. The Alpatronix warranty will fully cover your purchase against all defects in material and/or workman ship for an entire year. Most return policies only allow returns for a period of 14 – 30 days from the date of purchase, so hurry and register your product to give yourself peace of mind knowing Alpatronix has got you covered for a whole year.


CAUTION

- Never plug in a wet device to an electric outlet for charging.
- Never use this device to charge another devic when wet.

Contents

- [1 Layout and Functions](#)
- [2 Step I Register Your Product](#)
- [3 Functions](#)
- [4 TWS Function](#)
- [5 Power Bank Function](#)
- [6 Caring for your AX600](#)
- [7 Troubleshooting](#)
- [8 Technical Specification](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

Layout and Functions

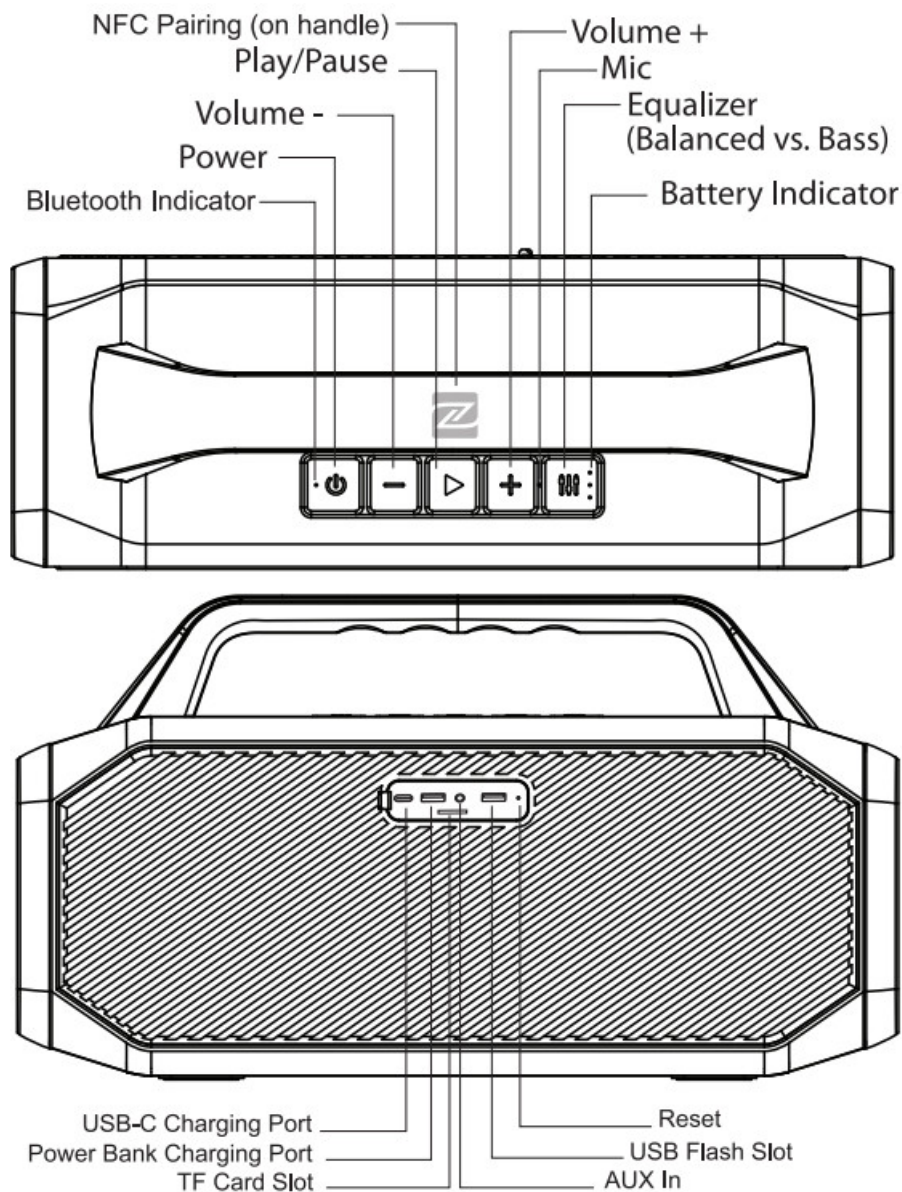

Step I Register Your Product

Register your product and benefit from the 1-year warranty. It's quick and easy.

Most return policies only allow for a defective product to be returned within 14 – 30 days after the date of purchase ... and most issues that happen due to defects in material and workmanship have a knack of happening after this return period has ended. We have seen the sad-puppy look on customers' faces for too long and understand how upsetting it is to spend your hard-earned dollars on something that stops working after a few weeks! That's why Alpatronix's Ironclad Warranty will protect you for a whole year against all defects in material and/or workmanship. So register your product by visiting www.alpatronix.com, and click on the "Warranty" on the top menu to register your product and activate your warranty. Rest easy that you are covered no matter what the return policy is where you purchased your product!

If you have a defective product and need us to take care of you, email us at support@alpatronix.com and rest assured that our support team will make this a quick and easy process with as little pain as possible.

Notice:






Alpatronix warranty is only valid when you purchase from authorized sellers, and only within the country in which you purchased the product. If you are not sure whether the retailer you are purchasing from is an authorized retailer, please contact us and we will be happy to further assist you.

Alpatronix sells directly on Amazon.com, and on the Alpatronix.com website.

Alpatronix warranty does not cover user damage. Tampering with your device or user damage also voids the manufacturer warranty.

Functions

Powering ON/OFF		
Operation	Instructions	LED Indicator
Power ON Power OFF	Press and hold for 2-3 seconds Press and hold for 2-3 seconds	Blue – Flashing OFF
	Pairing	
Operation Pairing Paired Un-Pair (disconnect)	Instructions	LED Indicator
	Automatically enters pairing mode Select “Alpatronix AX600° on your phone’s list of available bluetooth devices Press + and – buttons together	Blue – Flash every 2 seconds Indoor: Blue Solid Blue-Flash every 2 seconds
	Modes	
Operation	Instructions	LED Indicator
Equalizer (sound effects) Switch modes	Press (click) the button Press (click) the button	Indoor: Pulsing Outdoor. Slow flash
– AUX mode – TF mode – USB Flash -Shuffle(TF card & USB Disk) – TWS functions See Page 4 for full Instructions.	Insert AUX jack (automatic) Insert TF card (automatic) Insert USB flash card (automatic) Hold the button	Indoor. Green Solid Outdoor Green – Flashing WA
	Double-click power button on one speaker Pairing successful TWS	Blue/Green Flashing Master: Blue Flash Slave: Blue Solid Press + and – to disconnect. Press again to disconnect phone)

Music Functions		
Operation	Instructions	LED Indicator
Volume up Volume down Next song Previous song Play/Pause	Press (click) the + button Press (click) the – button Hold the + button Hold the – button Press (click) the  button	N/A N/A N/A N/A N/A
Call Functions		
Operation	Instructions	LED Indicator
Answer Reject Hang up Call back	Press (click) the  button. (when receiving call) Hold the  button. (when receiving call Press (click) the  button. (during the call) Hold the  button. (when not in call)	N/A N/A N/A Blue- Solid
Other Functions and Alerts		
Operation	Instructions	LED Indicator
Low battery alarm Low battery shut down Charging Charging completed RESET	Battery lower than 20% Battery lower than 10% Insert USB-C to USB charger (only cable is included) N/A Insert a toothpick in RESET port	White LED Flashing LEDs OFF White LEDs Flashing All 3 White LEDs ON N/A

Note: The volume and mode have memory function. When you power the AX600 ON, the speaker will resume the same volume and mode (indoor/outdoor) settings as before it was turned off.

TWS Function



1. Turn on both AX600 speakers. You will notice both devices will have the BLUE LED flashing rapidly.
2. Select one of the AX600 units as the MASTER and double click the power button. You will notice the MASTER AX600 will have the BLUE & GREEN LEDs flashing alternately. The MASTER AX600 will detect and pair with the other speaker (SLAVE AX600). Once paired, the MASTER AX600 will have the BLUE LED flash slowly, ready to pair with a phone.
The SLAVE AX600 will have a solid blue LED.

3. On your phone, go to Settings→ General→ Bluetooth, and then find the MASTER AX600 on the list of available bluetooth devices. Once paired, you will be able to play music in stereo using both devices.
4. To disconnectTWS, on the MASTER speaker press the+ and – buttons together. To ALSO disconnect from the phone, press the + and buttons together again.

NFC Pairing

This function is only available if your device supports NFC (Near-Field Communication).

1. Activate Bluetooth on the streaming device.
2. Activate NFC on the streaming device.
3. Hold your streaming device close to the NFC logo on top of the AX600 handle. First-time connection via NFC needs to be confirmed on your streaming device. After successful NFC pairing, the blue LED on the AX600 will stay solid.

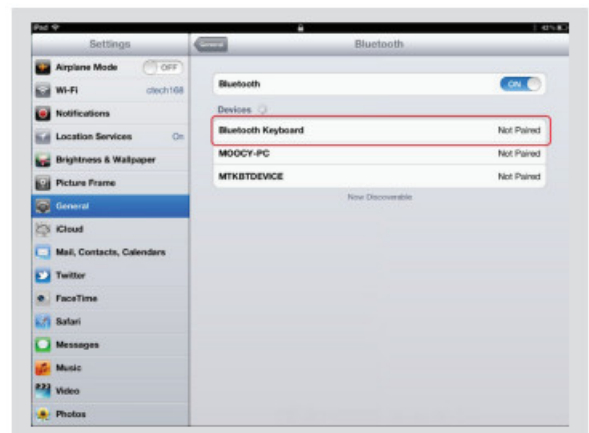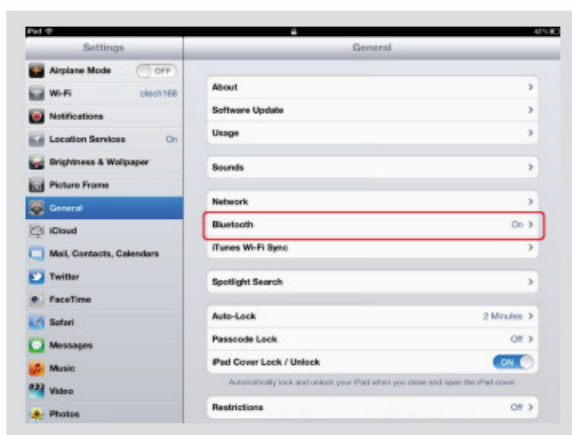

Note: Pairing with computers and laptops

The AX600 will pair easily with any Apple device including Mac computers and laptops, as well as most any Anderoid devices. For pairing with PC computers, please refer to your device's user manual, or download a compatible Bluetooth driver. Bluetooth driver compatibility varies depending on the type of PC computer or laptop you own, so Alpatronix Customer Service staff would not be able to help identify an appropriate driver. When searching for an appropriate driver, look for one that supports HSP, HFP, A2DP and AVRCP standard profiles.

Power Bank Function

You can use the AX600 to charge your digital devices. Packed with a built-in powerbank, this waterproof beauty can be the answer to all your power needs when you are out and about. Simply connect your USB-powered device to the USB charging output of the AX600 and see it charge right back up while you listen to all your favorite tunes and dance the night away!

Note: Never leave a charging device unattended. Always monitor your devices while charging, and disconnect if any signs of heat, fire, or other abnormal behavior appear.

Caring for your AX600

To extend the life of your AX600, please note the following

- Avoid submerging in water. The AX600 is water resistant against strong jets of water from any direction. Avoid exposing the ports to water. Make sure the port cover is secure and completely covering all ports before any exposure to water. Dry the unit completely before plugging into power for charging.

- Avoid exposure to extreme temperatures (hot or cold), or exposure to fire or any other heat source, as well as strong magnetic fields.
- Clean the product using a dry and soft cloth. Do not use detergents or chemicals.
- If you intend to store the product longer than 3 months, please ensure the battery has at least a 50% charge. Always fully charge the battery again after long-term storage (at least once every 6 months) and before use.
- Please only use the charging cable provided with the product. If you need additional charging cables, please contact Alpatronix for further assistance.
- Do not attempt to fix the product, or to open or disassemble it. It will void the manufacturer's warranty and expose you to risk of severe injury or electric shock. In case of any malfunction, please contact Alpatronix Customer Service for further assistance.
- Avoid dropping or knocking on hard surfaces.
- Do not use at high volume for extended periods, as this may cause hearing damage.

Troubleshooting

If you are unable to connect the speaker to your device, follow the steps below

- Check if the battery is low. When the battery is low, the speaker may have trouble connecting. Charge the battery fully and try again.
- Check the power switch and make sure it is on.
- Restart the speaker. Turn the power OFF and then turn it back ON again.
- Make sure the Bluetooth on your device is enabled.
- Try removing the pairing by going to the Bluetooth section of your device, choose AX600, and select "Forget This Device" (for Android devices: select "Unpair"). Turn Bluetooth off for 3 seconds on your device, and turn it back on. Repeat Step III to attempt to pair again.
- Reset the speaker by inserting a toothpick into the RESET port. This will reset the speaker to original factory settings.

Technical Specification

Frequency Response: 80Hz- 20KHz

Bluetooth Profile: VS.O, TWS, NFC, DSP, A2DP, AVRCP

Transmission Distance: < 33ft (10m)

Waterproof Level: IPX6 (Not Submersible)

Playback Time: 18-24 hours (50% volume)

11-15 hours (70% volume)

6-9 hours (MAX volume)

S/N Ratio: > 80db ± 3dB

THD: < 10%

TF/Flash Card Compatibility: MP3, WAV, WMA, FLAC

Dimensions: 14 x 5 x 7.7 in

35.5 x 12.7 x 19.5 cm

Weight: 6.4 lbs (2.9 kg)

Alpatronix Gives Back:

Alpatronix donates \$1 to charity for every review you leave for our products. We don't care if it's positive or negative, we just think every business needs to do some good in the world. Help us make the world a better place AND help us and your fellow customers by giving us your valuable feedback.

Thank you for being a contributing citizen of this world.



Please remember that your product comes with a 1-year warranty. If there is any problem with your product, please do not hesitate to contact us.

PO Box 68030, Anaheim, CA 92806


United States of America

(888) 407-7515

support@alpatronix.com

www.alpatronix.com

Documents / Resources

	<p>Alpatronix AX600 Bluetooth Speaker [pdf] User Manual AX600 Bluetooth Speaker, AX600, Bluetooth Speaker, AX600 Speaker, Speaker</p>
---	---