



anslut 024411 Dimmable Globe LED Bulb Instruction Manual

[Home](#) » [anslut](#) » anslut 024411 Dimmable Globe LED Bulb Instruction Manual 

Contents

- [1 anslut 024411 Dimmable Globe LED Bulb](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 SAFETY INSTRUCTIONS](#)
- [5 SYMBOLS](#)
- [6 TECHNICAL DATA](#)
- [7 DESCRIPTION](#)
- [8 USE](#)
- [9 MAINTENANCE](#)
- [10 Documents / Resources](#)



anslut 024411 Dimmable Globe LED Bulb



Product Information

The SMART Dimmable LED Bulb is a versatile lighting solution that can be controlled through the Smart Life app or with a voice assistant. It can be connected to your existing WiFi network without the need for a separate hub or router. With this bulb, you can enjoy features such as timer control, scheduling, and automatised events. The bulb has a rated voltage of 230V and operates at a frequency of 50Hz. It consumes 3.5W of power and has a luminous flux of 20W. The colour temperature is extra warm white at 1800K, with a colour rendering index (CRI) of 80. The socket type is E14. The SMART Dimmable LED Bulb has a lifespan of 20,000 hours, providing long-lasting illumination. It can be dimmed using the Smart Life app, allowing you to adjust the brightness according to your preference.

Product Usage Instructions

1. Download and install the Smart Life app on your smartphone or tablet.
2. Ensure that your WiFi network is active and stable.
3. Screw the SMART Dimmable LED Bulb into an E14 socket.
4. Turn on the power supply to the bulb.
5. Open the Smart Life app and create an account or log in if you already have one.
6. Follow the on-screen instructions to add the bulb to your Smart Life account.
7. Once the bulb is successfully added, you can control it through the app.
8. Use the app's interface to adjust the brightness of the bulb and set timers or schedules for automated lighting.
9. You can also integrate the bulb with a voice assistant, such as Amazon Alexa or Google Assistant, for hands-free control.
10. Refer to the Smart Life app's user guide for more advanced features and settings.

DIMMABLE GLOBE LED BULB

- Operating instructions (Translation of the original instructions)

Important! Read the user instructions carefully before use. Save them for future reference. Julia reserves the right to make changes. For latest version of operating instructions, see www.jula.com

- This declaration of conformity is issued under the sole responsibility of the manufacturer.
- Conforms to the following directives, regulations and standards.

<u>Directive/Regulation</u>	<u>Harmonised standard</u>
RED 2014/53/EU	EN 301 489-1 V2.2.3:2019, Draft EN 301 489-17 V3.2.5:2022, EN IEC 55015:2019+A11, EN 61547:2009, EN IEC 61000-3-2:2019+A1, EN 61000-3-3:2013+A2, EN 300 328 V2.2.2:2019, EN 62311:2008, EN 50665:2017, EN 50663:2017, EN 62560:2012+A11, EN 62493:2015
Eco design Directive 2009/125/EC	
Lightsource Regulation (EU) 2019/2020	
RoHS 2011/65/EU + 2015/863	EN 50581:2012

This product was CE marked in year:

SAFETY INSTRUCTIONS

- The product is only intended for indoor use.
- The product must only be serviced by qualified personnel, otherwise there is a risk of electrical accidents.
- Check that the mains voltage corresponds to the rated voltage on the type plate.

WARNING!

- Do not allow children to use the product.
- Do not dismantle the product or attempt to repair it. The product does not contain any parts that can be repaired by the user. Repairs must be carried out by an authorised service centre.
- The product must only be used for its intended purpose and in accordance with these instructions.
- Do not use the product if it is damaged or not working properly, or if the power cord or plug are damaged. Discard the product if it is damaged and replace with a new one.
- Do not expose the product to rain or moisture. Do not touch the power cord or the plug with wet hands.
- Do not subject the product to knocks and blows.

SYMBOLS

- Read the instructions.
- Not suitable for use in damp areas
- Approved in accordance with the relevant directives.
- Recycle discarded product in accordance with local regulations.

TECHNICAL DATA

- **Rated voltage** 230 V, 50 Hz
- **Power** 3.5 W
- **Temperature range** -20 – 40°C
- **Diffusion angle** 220°
- **Frequency** 2.4 GHz

- **Socket** E14
- **Colour rendering index** CRI 80
- **Colour temperature** 1800 K
- **Colour tone** Extra warm white
- **Equivalent x W incandescent bulb** 20 W
- **Luminous flux** 200 lm 360°
- **Life span** 20000 h
- **Dimmable** With app

DESCRIPTION

This is a SMART product that can be connected to existing WiFi and controlled via the app Smart Life, or with a voice assistant. Does not require a separate hub/router. You can control all SMART products in the app and use functions such as timer control, scheduling and automatised events.

SYSTEM REQUIREMENTS

Check that the smartphone is connected to the 2.4 GHz WiFi network and switch on the light. WiFi router. iPhone, iPad (IOS 11.0 or higher) or Android (5.0 or higher). Compatible with Google Assistant, Amazon Alexa and others.

USE

INSTALL APP

Scan the QR code to download the Smart Life app. Or search on App Store or Google Play.

FIG. 1



Register an account using your mobile phone number or email address. A verification code will be sent via SMS or email. Enter the code in the app and choose a password. If you already have an account, log in using your mobile phone number or email address and password.

FIG. 2



CONNECT PRODUCT

1. Check that the phone is connected to the WiFi network and that the light is switch on.
2. The light source should flash rapidly on connection to the WiFi network. If the light source does not flash rapidly when the light is turned on with the switch, turn it on and off quickly three times to put the light in pairing mode.
3. Press + (add unit), select a suitable product category and follow the instructions on the screen.

FIG. 3

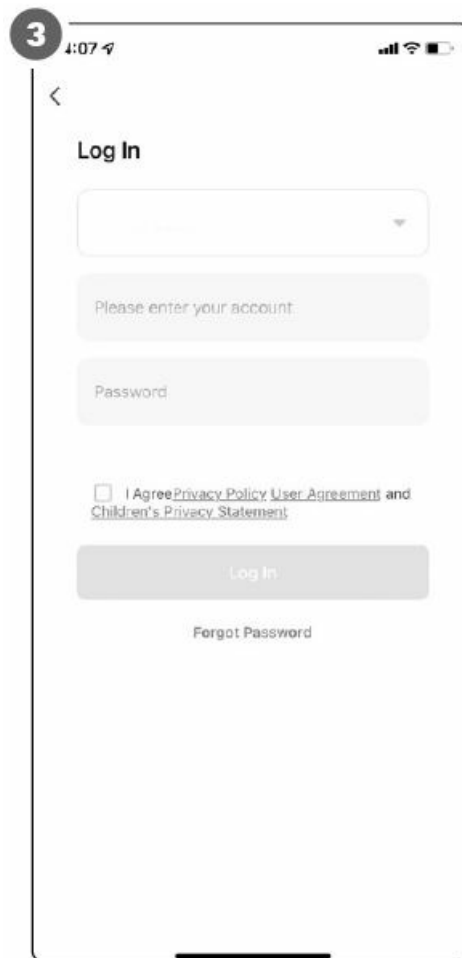


FIG. 4



4. Check that the LED light source is flashing rapidly (two times per second). If the LED light source does not

flash, turn it on and off 3 times with the switch so that the LED light source starts flashing.

5. Confirm WiFi network and password.

NOTE:

Only Wi-Fi 2.4 GHz is supported.

6. The app finds the lamp and registers it on the account.

7. Enter the name for the unit.

NOTE:

The unit name is also used by Amazon Alexa and Google Assistant.

FIG. 5


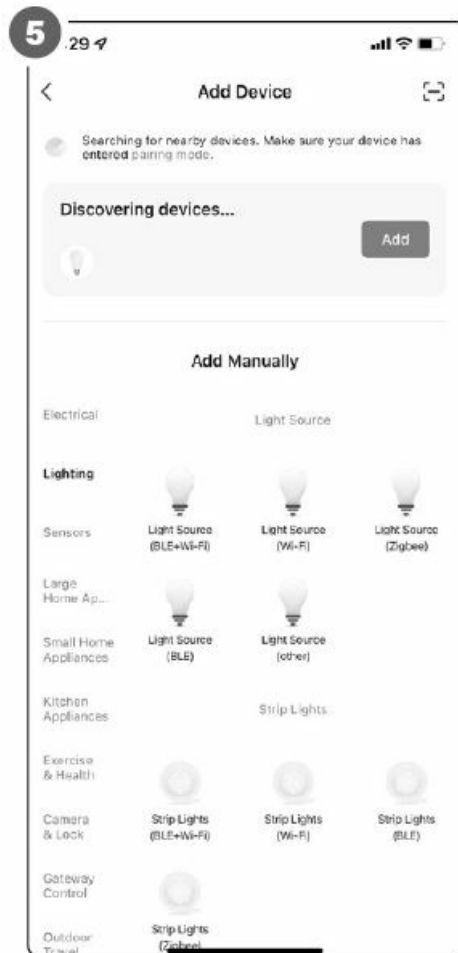


FIG. 6

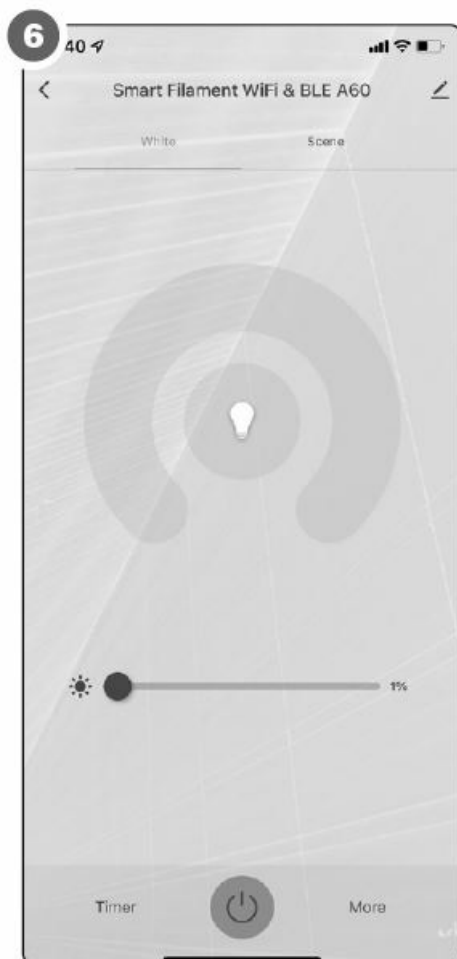

NOTE:

- Do not disconnect the power to the lamp when it is connected to the WiFi network. Use always the app to switching the lamp on and off.
- Activate Bluetooth on the smartphone before connecting the lamp.

MAINTENANCE

- Clean the outside of the lamp unit with a dry cloth.

NOTE:

- Do not use solvents, or strong or abrasive detergent.
- Do not attempt to clean the inside of the lamp.

Documents / Resources



[anslut 024411 Dimmable Globe LED Bulb](#) [pdf] Instruction Manual
024411 Dimmable Globe LED Bulb, 024411, Dimmable Globe LED Bulb, Globe LED Bulb, LED Bulb