

AOPEN PV12 Smart Projector User Guide

Home » AOPEN » AOPEN PV12 Smart Projector User Guide 🖔

Contents

- 1 AOPEN Smart Projector
 - 1.1 Smart System User's Guide
- **2 SMART FUNCTIONS**
- 2.1 AOPEN Smart Remote Guideline
- 2.2 Basic Functions:
- 2.3 Remote control layout
- 2.4 Home page overview
- 2.5 Configure system settings
- 2.6 Aptoide app
- 2.7 Accessing apps
- 3 Documents / Resources
- **4 Related Posts**

AOPEN Smart Projector

Smart System User's Guide

> Copyright © 2021. AOPEN Incorporated. All Rights Reserved. AOPEN Projector User's Guide Original Issue: 12/2021

SMART FUNCTIONS

AOPEN Smart Remote Guideline



Step 1: Connect the AOPEN smart device and the smart phone with AOPEN Smart Remote to the same network.


Step 2: Open " AOPEN Quick Settings" and check the IP address.

Step 3: Key in the IP address of AOPEN smart device to the connection window, and select "PAIR" button.

Step 4: Connection success and the control panel would be available to use.



Basic Functions:

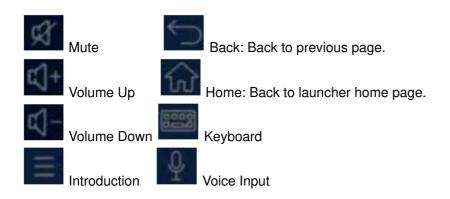

Swipe on the navigation control panel: Control focused item. **Swipe** on the mouse control panel: Control mopuse cursor.

3D mouse control: Hold the smart phone and change the phone position on control the mouse move.

Tap on control panel: Select/ Click

Long press on the control panel: Show shortcut key (Included home and back key)



Smart mode: You can smoothly control the apps on your device.


Normal mode: When Normal mode is on, control modes can be switched through the toggle button.

Mouse mode: Use touch pad control mouse cursor. **Navigation mode:** Use touch pad control focus.

Note:

- Specific button may show up according to different apps.
- AOPEN Smart Remote only support Android device.


Remote control layout

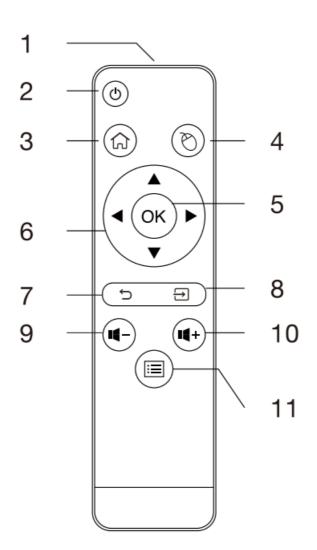

#	Icon	Function	Description
1		Infrared transmitter	Sends signals to the projector.
2	(b)	POWER	Turns the projector on or off.
3		НОМЕ	Back to Home page.
4	(b)	Mouse	Smart mode: Switch to mouse mode for Navigation key.
5	OK)	Select/Enter	Confirms your selection of items.
6	\$	Four directional select key s	Use up, down, left, right buttons to select items or make adjustments to your selection.
7	5	BACK	Returns to the previous operation.
8	\bigcirc	SOURCE	Changes the active source.
9	4-)	Volume Down	
10	4 +	Volume Up	
11		MENU	Press MENU to launch the Onscreen display (OSD) me nu or exit the OSD menu.

Home page overview

After the initial setup, the media center Home page will open:

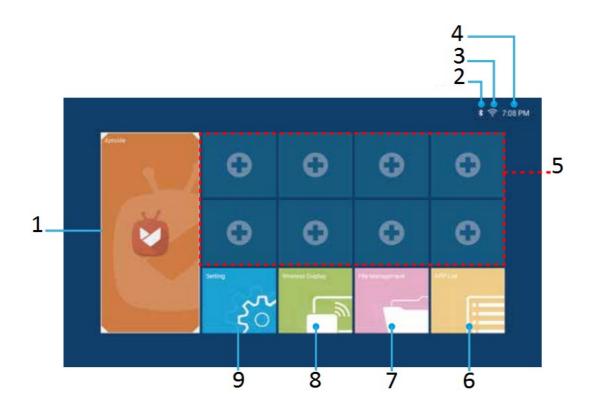

- 1. Aptoide app shortcut
- 2. Bluetooth status
- 3. Wi-Fi status
- 4. System time
- 5. App shortucts
- 6. List of all apps
- 7. File manager
- 8. Wireless display
- 9. Android settings

Navigating the AOPEN Smart Projector Home page

The items on the Home page can be accessed by using the remote control or Bluetooth mouse or AOPEN smart remote APP.

Note:

- The projector keypad supports the media center depending on the models.
- File management supports to read the USB disk, depending on the models.
- · Remote control:

Press **HOME** to access the Home page from any other page.

Press the four-direction navigation buttons ($\P \triangleright / \triangle / \P$) to select items.

Press **OK** to confirm the selection, open an item, or play/pause media content.

Press **BACK** (5) to move to the previous page or exit the app.

Press **MOUSE** to switch the remote control to the remote mouse mode.

• Bluetooth mouse:


Hover the cursor over the item you wish to open and left-click to open it.

Right-click to exit a menu or app.

Right-click repeatedly (if necessary) to access the Home page from any other page.

Configure system settings

To configure Android system settings, click **Setting** on the Home page.

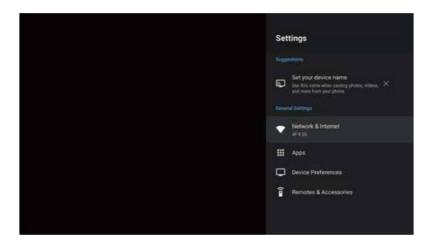

Select a menu item to configure its preferences.

Network & Internet


Note: Before configuring the network settings, make sure the Wi-Fi dongle is connected to the USB port on the rear of the projector.

To connect the projector to an available Wi-Fi network, do the following:

1. Slide the Wi-Fi switch from Off to On.



2. Select your preferred access point from the Wi-Fi list and click on it to make the connection.

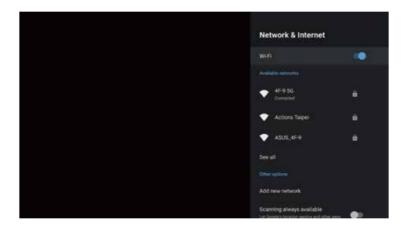

Note: If the selected Wi-Fi network is secured, you are prompted to enter a password.

Note: In the Network & Internet menu, you can also view Wi-Fi data usage, add Virtual Private Network (VPN), and configure Private DNS mode settings.

Set your device name


Change your device name when casting.

Apps

View recently opened apps, configure apps notifications, permissions, uninstall apps, and access settings.

Device preferences

Access the common settings and information about the device such as "About", "Date & time", "Language", "Keyboard", "Storage", "Location", "Security & restrictions", "Accessibility", and "Reboot".

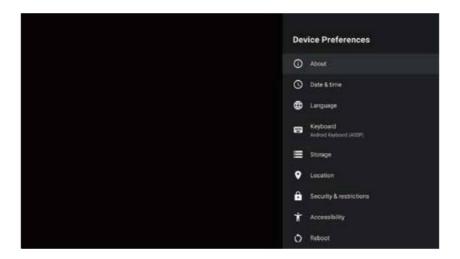

Remotes & Accessories

Manage the accessories via Bluetooth connection.

Note: Please make sure your devices are in pairing mode before pairing.




Aptoide app

Aptoide app is pre-loaded app store that allows you to install and discover apps easily in a safe environment. Access games, streaming apps, configure **Aptoide** settings, and more.

Note:


- To use **Aptoide** app, make sure the projector is connected to the Wi-Fi network.
- Apps that are not pre-loaded by AOPEN may not be compatible or work properly.

- Some apps may require a keyboard and mouse.
- Some apps may be region-specific.
- Users can install third-party apps by .apk file in the File Management. However, some third-party apps may have compatibility issues.
- For better compatibility with Aptiode, it is recommended not to update the Aptoide app version at all.

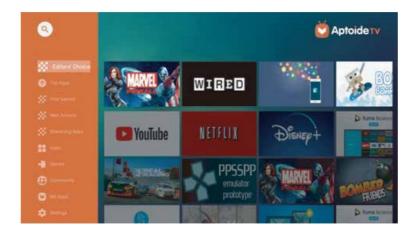

Accessing apps

You can access apps directly from the Home page or from the APP List. To view and access all the default apps, click **APP List** on the Home page.

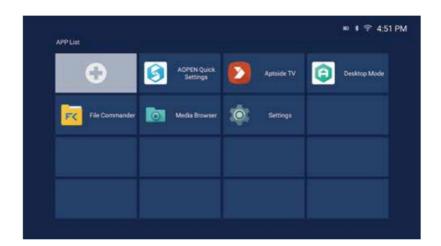

Click directly on the app icon to open the app.

To add the app shortcuts to the Home page for quick access, do either of the following:

• Click and check up to two apps.



• Click Add APP * and Back on the Home page directly and check up to two apps.



Note: depend on models.

Documents / Resources



Manuals+,