

artika Darren Hugger LED Ceiling Fan Instruction Manual

Home » artika » artika Darren Hugger LED Ceiling Fan Instruction Manual

Contents

- 1 artika Darren Hugger LED Ceiling Fan
- **2 Product Usage Instructions**
- **3 INCLUDED HARDWARE**
- **4 STEP-BY-STEP INSTALLATION**
- **5 MOUNTING BRACKET INSTALLATION**
- **6 WIRE CONNECTION**
- **7 BATTERY WARNING**
- **8 REMOTE CONTROL**
- 9 REPLACING THE REMOTE CONTROL **BATTERIES**
- **10 REMOTE CONTROL FUNCTIONS**
- 11 USA (FCC)
- **12 WARRANTY**
- 13 Frequently Asked Questions (FAQ)
- 14 Documents / Resources
- 14.1 References
- 15 Related Posts



artika Darren Hugger LED Ceiling Fan



Specifications:

• Fan Weight: 2.48 kg / 5.46 lb

• Maximum Weight Capacity: 15.9 kg / 35 lb

Product Usage Instructions

Important Safety Information:

Before installing the LED Ceiling Fan, carefully read and understand all instructions provided in this manual. Failure to follow the instructions may result in product malfunctions and void the warranty. Always turn off the main electrical supply before installation or maintenance.

Installation Recommendations:


It is highly recommended to have the LED Ceiling Fan installed by a certified electrician to ensure compliance with electrical and building codes in your region. Mount the fan at least 2.1 m / 82.6 in above the floor or ground level. Securely tighten all retaining screws before operating the fan.

INCLUDED HARDWARE


ITEM	DESCRIPTION	QUANTITY
	Wall anchor	× 4
B	Mounting bracket	× 1
© (3)	Retaining screw	× 4
	Junction box screw	× 2
E	Wire connector	× 3

•	Canopy screw	× 3 + 1 extra
G	Light fixture	× 1
(1)	Remote control	× 1
0	L Bracket	× 1

WHAT YOU WILL NEED



STEP-BY-STEP INSTALLATION

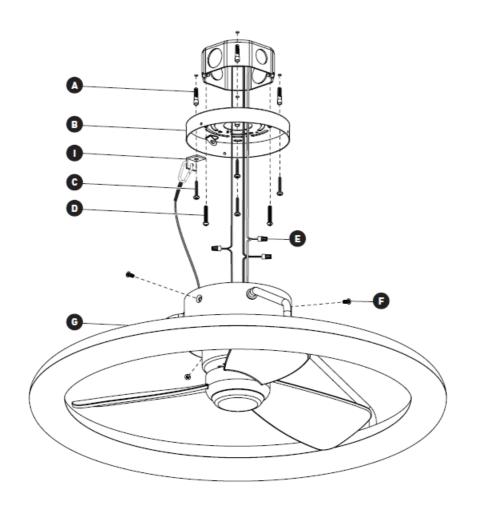

WARNING

IMPORTANT

The installer and/or user must read, understand and follow these instructions before installing the product. This product must be properly installed before it is used. If instructions are not followed, the manufacturer will not be held responsible for any problems or product malfunctions. Failure to follow installation and/or operating instructions will void the warranty. We recommend that this product be installed by a certified electrician. In some states or provinces, it is legally required that for this type of product be installed by a certified electrician, according to the electrical and building codes in effect in the region where the unit is being used.



WARNING:

Risk of electrical shock. Turn off power at the breaker panel.

Switch off the main electrical supply from the fuse box/circuit breaker before installing the unit or doing any maintenance. Do not use outdoors. Do not use with a dimmer.

CAUTION

IMPORTANT

Caution, mount with the lowest parts at least 2.1 m / 82.6 in above the floor or ground level.

The retaining screws must be securely tightened before operating the fan.

WARNING:

To reduce the risk of fire, electric shock or personal injury, mount the fan only to an outlet box marked "acceptable for fan support" and use the mounting screws provided with the outlet box.

Most outlet boxes commonly used for hanging light fixtures are not rated for fan support and may need to be replaced. If in doubt, contact a qualified electrician.

DO NOT USE THIS FAN WITH ANY SOLID-STATE SPEED CONTROL DEVICE

WARNING:

The mounting bracket is not designed to exceed 15.9 kg / 35 lb of total weight.

WARNING

All wiring in accordance with the national Electric Code ANSI/NFPA 70 and local codes.

To reduce the risk of personal injury, do not bend the blade brackets when installing the brackets, balancing the blades, or cleaning the fan. Do not insert foreign objects between rotating fan blades.


• FAN WEIGHT 2,48 kg / 5.46 lb


REQUIRED MARKING


"Acceptable for fan Support of 15.9 kg / 35 lb or less"


MOUNTING BRACKET INSTALLATION

- 1. Attach the mounting bracket securely to the ceiling using appropriate screws.
- 2. Ensure the bracket is level and stable before proceeding with further installation.

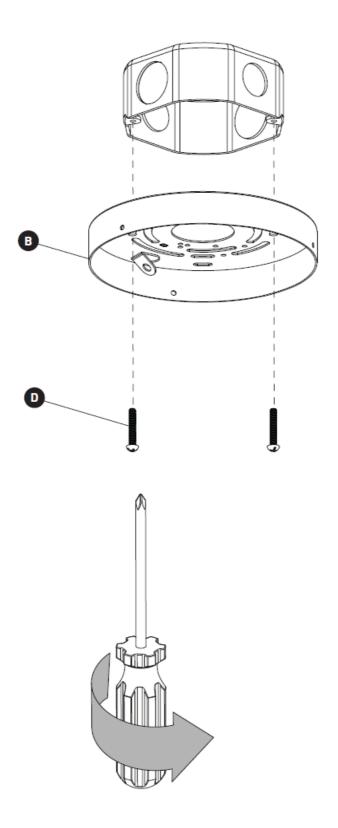

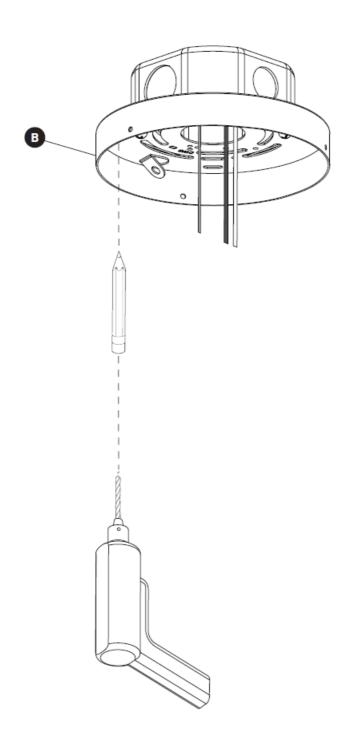

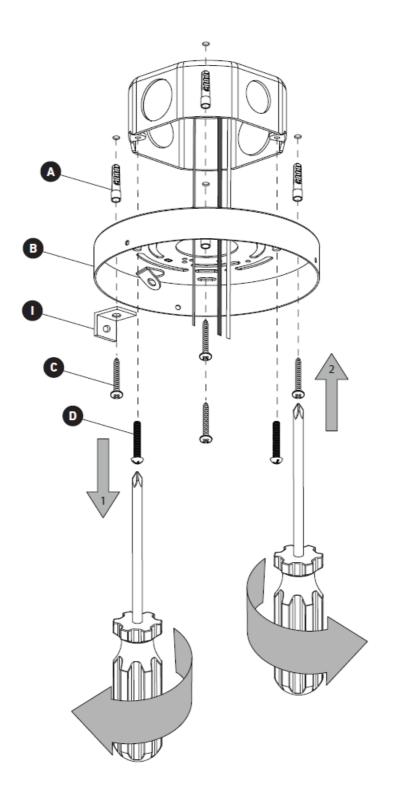


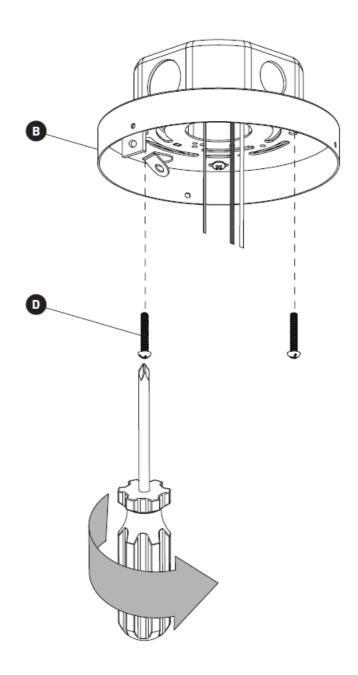


WIRE CONNECTION

Connect the wires following the color coding:

- White (N) to White
- Black (L) to Black

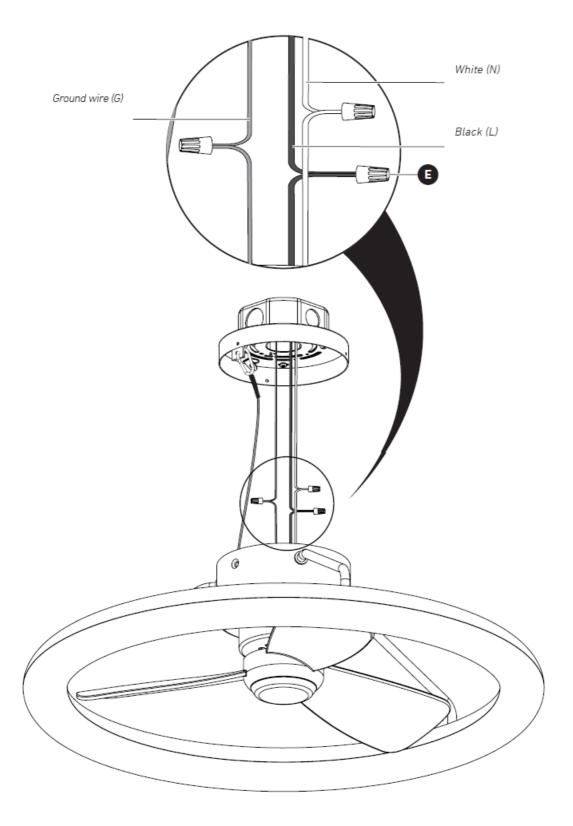

FINAL INSTALLATION

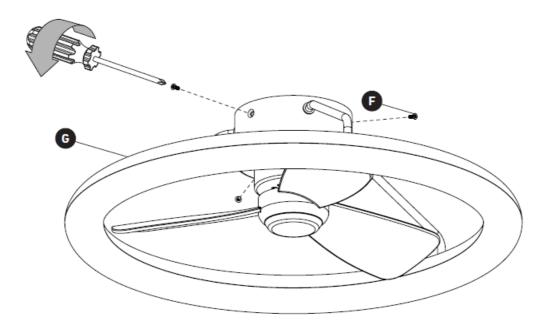

BATTERY WARNING

BATTERY WARNING


KEEP OUT OF REACH OF CHILDREN

Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 hours of ingestion. Seek medical attention immediately.

This product contains a button battery. If swallowed, it could cause severe injury or death in just 2 hours. Seek medical attention immediately.

- 1. WARNING KEEP BATTERIES OUT OF REACH OF CHILDREN
- 2. Swallowing may lead to serious injury in as little as 2 hours or death, due to chemical burns and potential perforation of the esophagus.
- 3. If you suspect your child has swallowed or inserted a button battery, immediately seek urgent medical assistance.
- 4. Examine devices and make sure the battery compartment is correctly secured, e.g. that the screw or other mechanical fastener is tightened. Do not use if compartment is not secure.
- 5. Dispose of used button batteries immediately and safely. Used batteries can still be dangerous.
- 6. Tell others about the risk associated with button batteries and how to keep their children safe.

REMOTE CONTROL

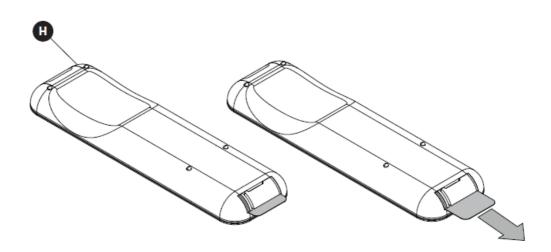


NOTE – READ AND KEEP THESE INSTRUCTIONS

NOTE:

- This product contains a lithium button/coin cell battery. If a new or used lithium button/coin cell battery is swallowed or enters the body, it can cause severe internal burns and can lead to death in as little as 2 hours. Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the battery, and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- All batteries must be properly disposed of and kept out of reach of children.
- · Even used batteries may cause injury.

REPLACING THE REMOTE CONTROL BATTERIES

- Always purchase the correct size and grade of battery that is suitable for the intended use.
- Replace all batteries within a set at the same time. Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc.) batteries.
- Clean the battery contacts and the contacts on the device.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from any equipment that will not be used for a long time.
- · Remove used batteries promptly.
- Batteries must be installed, removed and replaced by an adult or under adult supervision.
- Dispose of batteries in accordance with local regulations.
- Do not attempt to burn batteries or place them near a heat source.

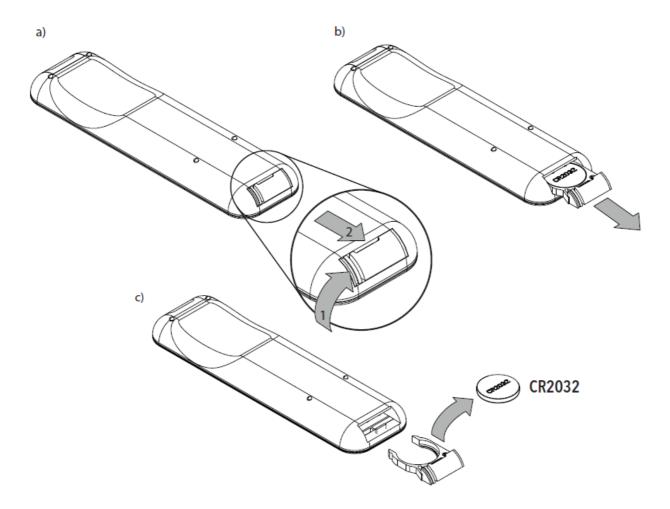


REMOTE CONTROL FUNCTIONS

REMOTE CONTROL PAIRING/UNPAIRING INSTRUCTIONS

- 1. Turn the fixture power off for at least 10 seconds.
- 2. Turn the fan on. Press the FAN ON/OFF button (no. 4) and the LIGHT ON/OFF button (no. 2) simultaneously within 10 seconds of turning on the fan. You will hear 1 "beep" sound when the pairing is complete, and 2 "beep" sounds when the unpairing is complete.
- 3. If pairing/unpairing is not successful, repeat the steps above.

Use one or two remotes to control one or two fans.

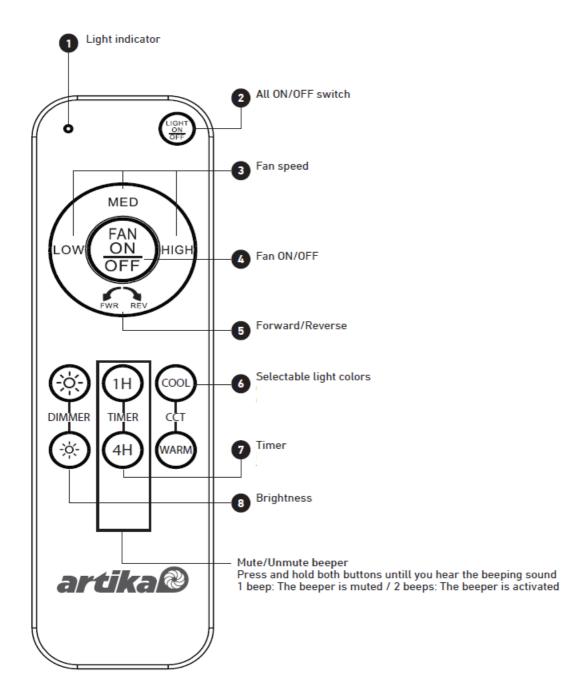

BATTERY WARNING

- KEEP OUT OF REACH OF CHILDREN
- If the battery compartment (if applicable) cannot be easily removed, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

NOTE – READ AND KEEP THESE INSTRUCTIONS

NOTE:

- All wiring must be in accordance with the National Electrical Code "ANSI/NFPA 70-1999" and local electrical codes.
- To reduce the risk of electric shock, ensure electricity has been turned off at the circuit breaker or fuse box before beginning.

- After making electrical connections, spliced conductors should be turned upward and pushed carefully up into
 the outlet box. The wires should be separated with the grounded conductor and the equipment grounding
 conductor on one side of the outlet box and ungrounded conductor on the other side of the outlet box.
- Check that the outlet box is securely installed such that it is able to support at least the fan weight (total weight of fan approximately 2.48 kg / 5.46 lb).
- This product contains a lithium button/coin cell battery. If a new or used lithium button/coin cell battery is swallowed or enters the body, it can cause severe internal burns and can lead to death in as little as 2 hours. Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep it out of reach of children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- · All batteries must be properly isposed of and kept out of reach of children. and
- Even used batteries" may cause injury.
- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Compatible battery type: CR2032
- · Nominal battery voltage: 3V.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

USA (FCC)

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- 1. This device does not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARRANTY

Artika For Living Inc. is proud to offer you a five-year (5) limited warranty on manufacturing defects from the date of purchase for residential use only. The warranty is extended to the original owner in the US, Canada, Mexico, the UK, Iceland, France and Spain and is non-transferable. It does not apply to retailers, commercial applications or establishments. The original sales receipt is required for all warranty claims. The remedy under this limited warranty shall be product or part replacement at Artika's discretion as provided herein and may not exceed the original purchase price.

This warranty is valid only on products installed in accordance with the building code and laws in effect in the region where the unit is being used, as well as in accordance with the provided instruction manual. It does not cover products installed incorrectly or subjected to abnormal use. You may be required to return product(s) or component part(s) for inspection and verification. Normal wear and tear, misuse, negligence, vandalism, improper maintenance (surface damage due to chemical interaction or cleaning agents including, but not limited to, scouring pads, use of cleaners containing abrasives, alcohol or other organic solvents), improper handling, accident, abuse, fire, flood, theft, acts of God, neglect, or alteration of the product will not be covered under this limited warranty.

It excludes any accessories that accompany the product including, but not limited to bulbs or batteries. The warranty does not cover handling, labour, transportation, or any other cost associated with the installation or replacement of the product. This limited warranty is valid in the country of purchase and for products sold by Artika authorized retailers only. Artika for Living Inc. will not be held responsible for any direct or consequential damages or injuries related to the use of this product arising from improper use or installation of this product. Please visit www.artika.com to discover more about Artika for Living Inc.

Artika For Living Inc.

1756, 50th Avenue Montréal (Lachine), Québec Canada H8T 2V5

- 1-<u>866-661-9606</u>
- support@artika.com
- www.artika.com

Customer Service

Monday to Friday 9 am – 5 pm EST

Frequently Asked Questions (FAQ)

Q: Can I use the LED Ceiling Fan with a dimmer?

A: No, do not use the fan with a dimmer as it is not recommended and may cause malfunctions.

Q: Is it safe to install the fan without a certified electrician?

A: It is recommended to have the fan installed by a certified electrician to ensure compliance with safety standards and building codes.

Documents / Resources



artika Darren Hugger LED Ceiling Fan [pdf] Instruction Manual

23fan-dar-w2bl-im-12fdf0, Darren Hugger LED Ceiling Fan, Darren Hugger, LED Ceiling Fan, Ceiling Fan, Fan

References

- One moment, please...
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.