

techno line WS 8005

Technoline Digital Wall Clock WS8005 User Manual

Model: WS 8005 | Brand: techno line

1. PRODUCT OVERVIEW

The Technoline WS 8005 is a versatile digital clock designed for both table and wall mounting. It features radio-controlled time synchronization (DCF-77 signal for German version), ensuring highly accurate time display. This clock also includes an alarm with snooze function, 12/24-hour display options, a 7-language weekday display, and an indoor temperature measurement in Celsius or Fahrenheit.



Figure 1: Front view of the Technoline WS8005 Digital Wall Clock, displaying time, date, day, and indoor temperature.

Key Features:

- Radio-controlled time (DCF-77 signal) for automatic and accurate time setting.
- Large, clear digital display for easy readability.
- Indoor temperature display in °C or °F.
- Alarm with snooze function.
- 12/24-hour time format selection.
- 7-language weekday display.
- Suitable for wall mounting or tabletop use.

2. SETUP AND INITIAL OPERATION

2.1. Battery Installation

The Technoline WS 8005 requires 2 AA batteries (not included). Ensure correct polarity when inserting the batteries.

1. Locate the battery compartment on the back of the clock.
2. Open the battery compartment cover.
3. Insert 2 new AA batteries, matching the (+) and (-) terminals as indicated inside the compartment.

4. Close the battery compartment cover securely.

2.2. Initial Time Synchronization

Upon battery installation, the clock will automatically begin searching for the DCF-77 radio signal to set the time. This process may take several minutes to an hour, depending on your location and signal strength. Place the clock near a window for better reception during initial setup.

- An antenna icon will typically appear on the display when the clock is receiving the signal.
- Once synchronized, the exact time, date, and day will be displayed.

2.3. Manual Time Setting (if radio signal is unavailable)

If the radio signal is consistently weak or unavailable, you can manually set the time and date.

1. Refer to the specific buttons on the back of your clock (e.g., SET, UP, DOWN).
2. Press and hold the SET button to enter time setting mode.
3. Use the UP/DOWN buttons to adjust the hour, minute, year, month, and day.
4. Press SET again to confirm each setting and move to the next.
5. Exit setting mode by pressing SET one last time or waiting for the display to time out.



Figure 2: Side view of the Technoline WS8005, illustrating its slim profile and the location of control buttons on the back/side.

3. OPERATING INSTRUCTIONS

3.1. Time Zone Setting

The clock allows for time zone adjustments to compensate for regional differences from the DCF-77 signal.

- Press the TIME ZONE button (or similar, refer to your specific unit's button labels).
- Use the UP/DOWN buttons to adjust the time zone offset (e.g., +1, -2 hours).
- Confirm the setting.

3.2. Alarm and Snooze Function

To set the alarm:

1. Press the ALARM button to display the alarm time.
2. Press and hold ALARM to enter alarm setting mode.
3. Use UP/DOWN to set the desired alarm hour and minute.
4. Press ALARM to confirm.

5. To activate/deactivate the alarm, press the ALARM ON/OFF button (or similar). An alarm icon will appear when active.

When the alarm sounds, press the SNOOZE button to temporarily silence it for a few minutes. The alarm will sound again after the snooze period. To stop the alarm completely, press any other button (e.g., ALARM, SET).

3.3. 12/24 Hour Display

Toggle between 12-hour (with AM/PM indicator) and 24-hour time formats by pressing the 12/24 HR button (or similar).

3.4. Weekday Language Display

The clock supports 7 languages for the weekday display. Press the LANGUAGE button (or similar) repeatedly to cycle through the available languages until your preferred language is shown.

3.5. Temperature Unit Selection

Switch between Celsius (°C) and Fahrenheit (°F) for the indoor temperature display by pressing the °C/°F button (or similar).

4. MAINTENANCE

- **Cleaning:** Wipe the clock with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the display or casing.
- **Battery Replacement:** Replace batteries when the display dims or the clock stops functioning correctly. Always replace both batteries at the same time with new ones.
- **Storage:** If storing the clock for an extended period, remove the batteries to prevent leakage.

5. TROUBLESHOOTING

Problem	Possible Cause	Solution
Clock not displaying time / blank screen.	Dead or incorrectly inserted batteries.	Check battery polarity. Replace with new AA batteries.
Time is incorrect or not setting automatically.	Poor radio signal reception (DCF-77). Interference from electronics. Clock too far from transmitter.	Move the clock closer to a window or to a different location away from electronic devices. Allow time for signal acquisition. Manually set the time if necessary.
Alarm not sounding.	Alarm not activated. Alarm volume too low (if adjustable).	Ensure the alarm icon is displayed. Check alarm settings.
Temperature reading is inaccurate.	Clock exposed to direct sunlight or heat sources.	Relocate the clock to an area with stable ambient temperature, away from direct heat or cold sources.

6. SPECIFICATIONS

Feature	Detail
Model Number	WS 8005
Brand	techno line
Display Type	Digital
Time Control	Radio Controlled (DCF-77 Signal)
Power Source	Battery Powered (2 x AA batteries, not included)
Special Features	Alarm, Snooze, Indoor Temperature Display (°C/°F), 12/24 Hr Display, 7-Language Weekday
Mounting Type	Wall Mount, Tabletop
Product Dimensions	Approx. 2.8 x 22.8 x 18 cm (1.1 x 8.98 x 7.09 inches)
Item Weight	Approx. 0.33 Kilograms (11.6 ounces)
Material	Plastic (Frame: Silver/Black)

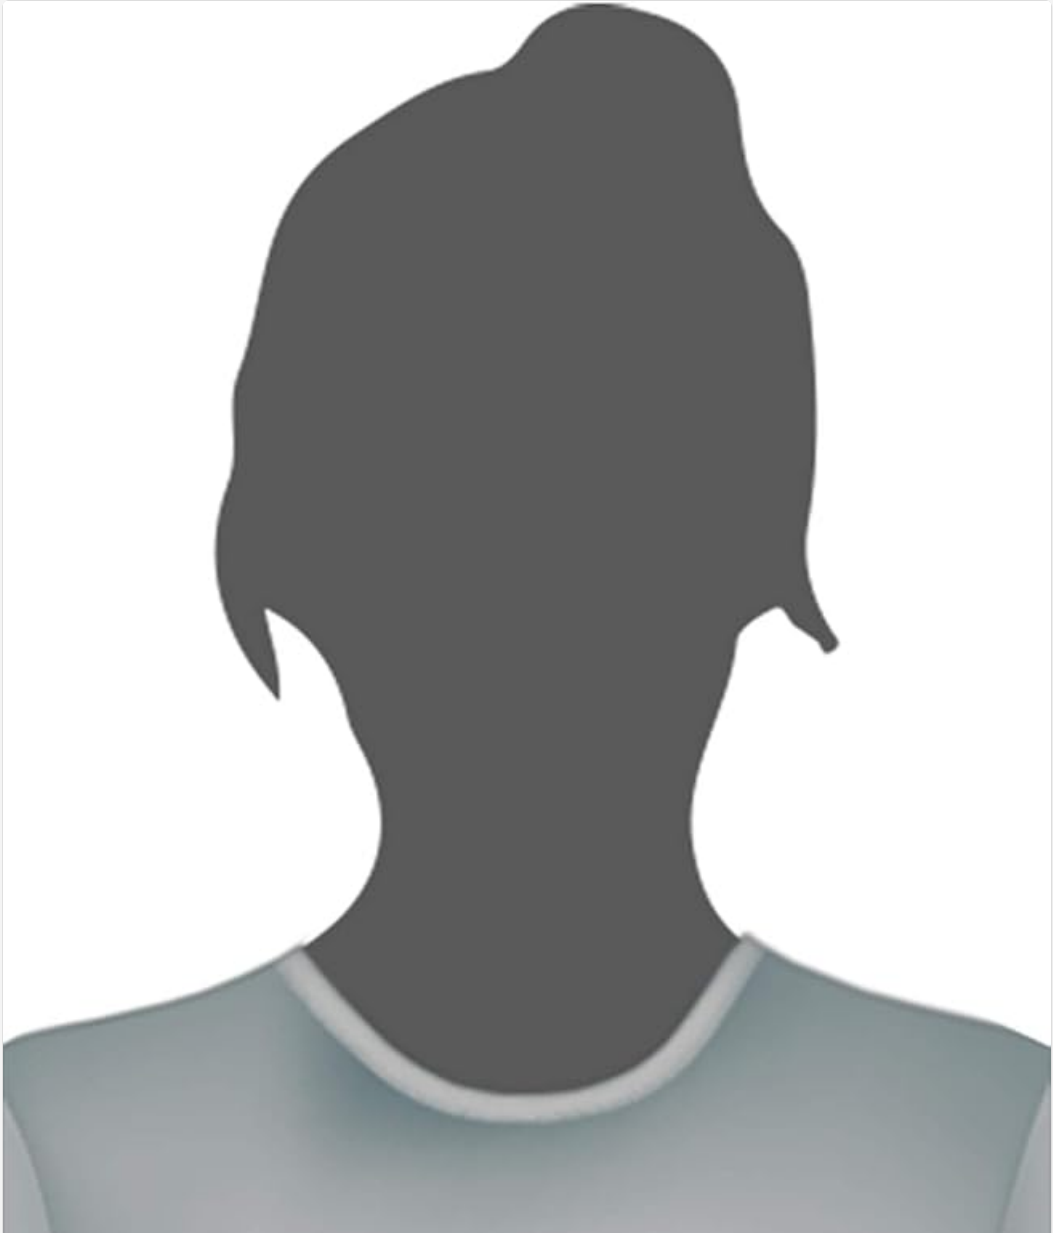




Figure 3: Size comparison of the Technoline WS8005 clock, demonstrating its approximate dimensions relative to a person.



7. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation included with your product or visit the official techno line website. Keep your purchase receipt as proof of purchase for any warranty claims. Typical warranty coverage includes defects in materials and workmanship under normal use. Please note that warranty terms may vary by region and retailer.

© 2024 techno line. All rights reserved. Information subject to change without notice.

For more information, visit www.technoline.eu (Note: This is a placeholder link, please refer to the actual manufacturer's website for support).

Related Documents - WS 8005

	Moon Phase Clock Instruction Manual - Radio Controlled Time, Date, Temperature Comprehensive instruction manual for the Moon Phase Clock, detailing setup, features, manual settings, and maintenance for the DCF-77 radio-controlled timepiece by Technoline.
	TechnoLine DCF-77 Radio Controlled Projection Clock with Digital Thermometer User Manual Comprehensive user manual for the TechnoLine DCF-77 Radio Controlled Projection Clock with Digital Thermometer. Learn how to set up, operate, and maintain your clock, including features like time projection, alarm, indoor temperature display, and radio-controlled time synchronization.
	Technoline Radio Controlled Projection Clock with Digital Thermometer User Manual Comprehensive guide for the Technoline WT-590e7 radio-controlled projection clock and digital thermometer. Learn about setup, features, DCF-77 time synchronization, alarm, manual settings, and specifications.
	Weather Forecast Memo Alarm Clock Instructions Manual - TechnoLine Comprehensive instruction manual for the TechnoLine Weather Forecast Memo Alarm Clock, detailing setup, features, radio-controlled time, weather forecasting, alarm functions, and specifications.
	Memo Alarm Clock Operating Manual: Radio Controlled Time and Features Comprehensive operating manual for the Memo Alarm Clock, detailing features, setup, radio-controlled time reception, manual time setting, alarm functions, maintenance, and specifications.
Preview	Wireless 868 MHz Weather Station Instruction Manual Comprehensive instruction manual for the Wireless 868 MHz Weather Station, covering setup, features, operation, and specifications. Learn how to install batteries, set the time, understand weather forecasts, and maintain your device.

Documents - techno line – WS 8005

[\[pdf\]](#) User Manual Instructions
EM3333 Manual CN Buy Techno Line WS 8005 Radio Wall clock 228 mm x 180 28 Silver Black
Conrad Electronic user safety instructions 672155 techno line ws radio wall silver black asset conrad
media10 add 160267 c1 nl 000672155ML08 |||
WS 8005 Manual Technische gegevens: Radiografische wekker met CDF-77 signaal
12/24 uur formaat Optie Handmatige tijdsinstelling Tijdszone instelling: -12/ 12 uur
Doorlopende kalender tot het jaar 2054 Datum en weekdag display Temperatuur
display in C of F Weekdagen in zeven talen: En...
lang:nl **score:37** filesize: 72.18 K page_count: 2 document date: 2010-07-22

[\[pdf\]](#) User Manual Instructions

EM3333 Manual CN Buy Techno Line WS 8005 Radio Wall clock 228 mm x 180 28 Silver Black
Conrad Electronic user safety instructions 672155 techno line ws radio wall silver black asset conrad
media10 add 160267 c1 es 000672155ML04 |||

WS 8005 Manual Datos tcnicos: DCF-77 Reloj controlado por Radio Tiempo en formato de 12/24 horas Opcin de ajuste del tiempo manual Configuracin de Zona Horaria: -12/ 12h Calendario continuo hasta el ao 2054 Visualizacin de fecha y da de la semana Visualizacin de la temperatura en C o F...
lang:es **score:36** filesize: 99.13 K page_count: 2 document date: 2010-07-22

[\[pdf\]](#)

Datenblatt Tehnični podatki 672155 Radijsko vodena stenska ura Techno Line WS 8005 228 mm x 180 28 srebrna črne barve MegaShop spletna trgovina Megashop si tehnicni radijsko techno line ws crne asset conrad media10 add 160267 c1 de 890546638DS00 |||

Technoline Techno Line **WS 8005** - Wecker rechteckig - elektronisch Schreibtisch - geeignet fr Wandmontage Gruppe Hersteller Hersteller Art. Nr. EAN/UPC
Haushaltsgerte Technoline WS8005 4029665080055 Beschreibung Techno Line **WS 8005** - Wecker - rechteckig - elektronisch - Schreibtisch, geeignet fr W...
lang:de **score:31** filesize: 75.76 K page_count: 1 document date: 2024-03-13

[\[pdf\]](#) Instructions

Microsoft Word ku672155 Hirtn 351 M 341nyi Ivett Buy Techno Line WS 8005 Radio Wall clock 228 mm x 180 28 Silver Black Conrad Electronic user safety instructions 672155 techno line ws radio wall silver black asset conrad media10 add 160267 c1 hu 000672155ML06 |||

Falira, **WS 8005** Conrad Szakzlet 1067 Budapest, Terz krt. 23. Tel: 061 302-3588
Conrad Vevszolglat 1124 Budapest, Jagell t 30. Tel: 061 319-0250 Funkcik: Idzna
bellts: -12/ 12h Naptr 2054-ig A dtum s a ht napjnak kijelzse Hmrsklet kijelz s C-ban vagy F-ban A ht aktuális napjnak kij...
lang:no **score:29** filesize: 69.08 K page_count: 1 document date: 2012-06-29

[\[pdf\]](#) User Manual

EM3333 Manual CN WS 8005 Technische gegevens ▷ Radiografische wekker met CDF 77 signaal 12 24 uur formaat Optie Handmatige tijdsinstelling Tijdszone manual 672155 techno line ws dcf nastenne hodiny 228 mm x 180 28 stribna cerna asset conrad media10 add 160267 c1 nl 000672155ML08


WS 8005 Manual Technische gegevens: Radiografische wekker met CDF-77 signaal 12/24 uur formaat Optie Handmatige tijdsinstelling Tijdszone instelling: -12/ 12 uur Doorlopende kalender tot het jaar 2054 Datum en weekday display Temperatuur display in C of F Weekdagen in zeven talen: En...
lang:nl **score:28** filesize: 72.18 K page_count: 2 document date: 2010-07-22

[\[pdf\]](#) Instructions

376 377 0006 0007 0002 0001 0005 000 000a 000n 0000 000c 000z 000N 000s 000t 000e 000h 000o 000d 000i 000y 000W 000S 0008 Docekal Frantisek Buy Techno Line WS 8005 Radio Wall clock 228 mm x 180 28 Silver Black Conrad Electronic user safety instructions 672155 techno line ws radio wall silver black asset conrad media10 add 160267 c1 cs 000672155ML01 |||

Nstnn DCF hodiny **WS 8005** Obj. c.: 67 21 55 Vzen zkaznku, dkujeme Vm za Vasi dvru a za nkup nstnnch DCF hodin **WS 8005**. Tento nvod k obsluze je soust vrobku. Obsahuje dlezit pokyny k uvedení vrobku do provozu a k jeho obsluze. Jestlize vrobek pedte jinm osobm, dbejte na to, aby ste jim odevzdali i tent...

lang:hr **score:26** filesize: 115.88 K page_count: 3 document date: 2012-04-25

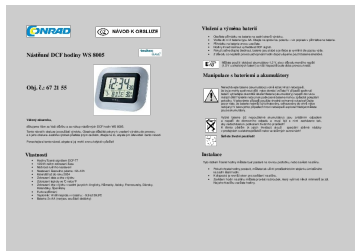



[pdf]

142 Andreja Trdina Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x 180 28

Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws funk

wanduhr silber schwarz asset conrad media10 add 160267 c1 sl 000672155ML10 |||


SLO - NAVODILA ZA UPORABO IN MONTAZO Kat. št.: 67 21 55 www.conrad.si

NAVODILA ZA UPORABO TECHNO LINE radijsko vodena stenska ura **WS 8005**

Kataloska št.: 67 21 55 1 TEHNICNI PODATKI: DCF-77 radijsko vodena ura 12/24h

format prikaza casa Moznost rocne nastavitve casa Nastavitvev casovnega pasu:...

lang:hr **score:26** filesize: 208.19 K page_count: 5 document date: 2013-06-03

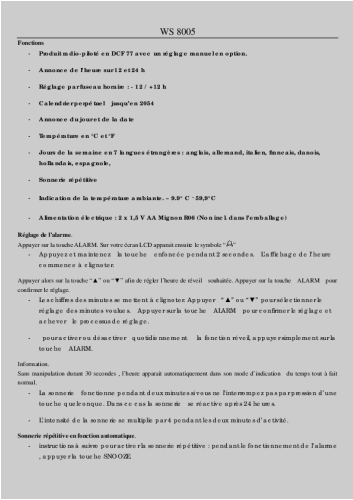

[pdf] User Manual

EM3333 Manual CN Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x

180 28 Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws

funk wanduhr silber schwarz asset conrad media10 add 160267 c1 fr 000672155ML05 |||


WS 8005 Fonctions - Produit radio-pilot en DCF 77 avec un rglage manuel en option.

- Annonce de l heure sur 12 et 24 h - Rglage par fuseau horaire : - 12 / 12 h -

Calendrier perptuel jusqu en 2054 - Annonce du jour et de la date - Temprature en C

et F - Jours de la semaine en 7 langues trangres : a...

lang:fr **score:26** filesize: 55.98 K page_count: 3 document date: 2010-07-22

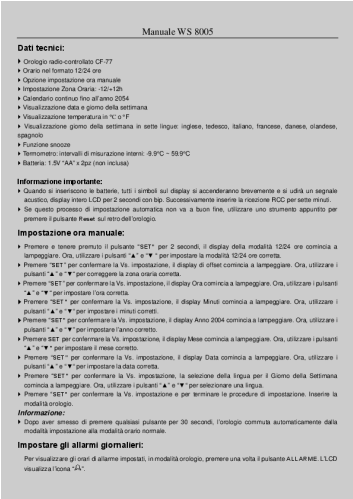

[pdf] User Manual

EM3333 Manual CN Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x

180 28 Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws

funk wanduhr silber schwarz asset conrad media10 add 160267 c1 it 000672155ML07 |||

Manuale **WS 8005** Dati tecnici: Orologio radio-controllato CF-77 Orario nel formato

12/24 ore Opzione impostazione ora manuale Impostazione Zona Oraria: -12/ 12h

Calendario continuo fino all anno 2054 Visualizzazione data e giorno della settimana

Visualizzazione temperatura in C o F Vi...

lang:it **score:26** filesize: 88.74 K page_count: 2 document date: 2010-07-22

WS 8005 Manual
Datos técnicos: • DCF-77 Radio controlado por Radio • Tiempo en formato de 12/24 hora • Opción de zona del tiempo manual • Configuración de Zona Horaria 12/24 h • Calendario continuo hasta el año 2054 • Visualización de fecha y día de la semana • Visualización de la temperatura en °C o °F • Visualización el día de la semana en seis idiomas: inglés, alemán, francés, danés, holandés, español • Función de medición de alarma • Termómetro: Límites de medición en interiores: -9.9°C - 59.9°C • Pila: 1.5V "AA" de tamaño A 2pilas (no incluidas)
Información importante: • Cuando inserte las pilas, pulse los símbolos de la pila en la pantalla o mantenga el botón de encendido y verá un tono de señal, con una visualización LCD durante 2 segundos con un punto, después introduce la recepción RSC durante cinco minutos. • Si este proceso de ajuste automático no es válido, tiene que entrar en el modo de ajuste de hora manual para presionar el botón de ajuste en la parte de la zona del día.
Ajuste del tiempo manual: • Presione y mantenga sujeto el botón "SET" durante 2 segundos, la pantalla en el modo 12/24 horas comienza a parpadear. Ahora use los botones "A" y "F" para fijar el modo correcto de 12/24 hora. • Presione "SET" para confirmar su ajuste, la visualización de offset comienza a parpadear. Ahora use los botones "A" y "F" para fijar el modo correcto de zona horaria. • Presione "SET" para confirmar su ajuste, la visualización de la fecha comienza a parpadear. Ahora use los botones "A" y "F" para fijar la hora correcta. • Presione "SET" para confirmar su ajuste, la visualización del Mes comienza a parpadear. Ahora use los botones "A" y "F" para fijar el número correcto. • Presione "SET" para confirmar su ajuste, la visualización del Año 2004 comienza a parpadear. Ahora use los botones "A" y "F" para fijar el año correcto. • Presione "SET" para confirmar su ajuste, la visualización del Mes comienza a parpadear. Ahora use los botones "A" y "F" para fijar el día correcto. • Presione "SET" para confirmar su ajuste, la visualización de la Fecha comienza a parpadear. Ahora use los botones "A" y "F" para fijar la hora correcta. • Presione "SET" para confirmar su ajuste, la visualización de la reducción del idioma para el día de la semana comienza a parpadear. Ahora use los botones "A" y "F" para seleccionar un idioma. • Presione "SET" para confirmar su ajuste y para terminar el proceso de ajuste, introduzca el modo de reloj. Info: • Después de 30 segundos sin presionar ningún botón, el reloj se cambia del modo set al modo de tiempo normal.
Ajustar las alarmas diarias: Para ver las horas de las alarmas configuradas, en el modo de reloj, presione una vez el botón de ALARMA. LCD muestra el valor "01". • Presione y mantenga sujeto el botón de ALARMA durante 2 segundos hasta que aparezca en la pantalla el icono parpadear: con la hora de la alarma. Ahora use los botones "A" y "F" para seleccionar la hora de alarma que necesite y presione brevemente el botón de ALARMA para cambiar la hora de alarma.

Manuale WS 8005
Dati tecnici: • Orologio radio-controlato CF-77 • Orario nel formato 12/24 ore • Opzione impostazione ora manuale • Impostazione Zona Oraria: 12/24h • Calendario continuo fino all'anno 2054 • Visualizzazione data e giorno della settimana • Visualizzazione temperatura in °C o °F • Visualizzazione giorno della settimana in sette lingue: inglese, tedesco, italiano, francese, danese, olandese, spagnolo • Funzione sveglia • Termometro: intervalli di misurazione interni: -9.9°C - 59.9°C • Batteria: 1.5V "AA" x 2pz (non inclusa)
Informazione importante: • Quando si inseriscono le batterie, tutti i simboli sul display si accenderanno brevemente e si udrà un segnale acustico. Il display resterà LCD per 2 secondi con l'ago. Successivamente inizierà la ricezione RSC per sette minuti. • Se questo processo di impostazione automatica non va a buon fine, utilizzare uno strumento appurato per premere il pulsante Reset sul retro dell'orologio.
Impostazione ora manuale: • Premere e tenere premuto il pulsante "SET" per 2 secondi, il display della modalità 12/24 ore comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare la modalità 12/24 ore corretta. • Premere "SET" per confermare la Vs. impostazione, il display di offset comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per correggere la zona oraria corretta. • Premere "SET" per confermare la Vs. impostazione, il display Ora comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare l'ora corretta. • Premere "SET" per confermare la Vs. impostazione, il display Minuti comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare i minuti corretti. • Premere "SET" per confermare la Vs. impostazione, il display Anno 2004 comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare l'anno corretto. • Premere "SET" per confermare la Vs. impostazione, il display Mese comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare il mese corretto. • Premere "SET" per confermare la Vs. impostazione, il display Data comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per impostare la data corretta. • Premere "SET" per confermare la Vs. impostazione, la selezione della lingua per il Giorno della Settimana comincia a lampeggiare. Ora, utilizzare i pulsanti "A" e "F" per selezionare una lingua. • Premere "SET" per confermare la Vs. impostazione e per terminare il processo di impostazione, inserire la modalità orologio. Informazioni: • Dopo aver inserito di premere qualsiasi pulsante per 30 secondi, l'orologio tornerà automaticamente dalla modalità impostazione alla modalità tempo normale.
Impostare gli allarmi gemelli: Per visualizzare gli orari di allarme impostati, in modalità orologio, premere una volta il pulsante ALLARME. L'LCD visualizza l'icona "A1".

WS 8005 Manual
Technical data: • DCF-77 Radio controlled Clock • Time in 12/24 hour format • Manual time setting option • Time Zone setting: 12/24h • Continuous calendar up to year 2054 • Date and weekday display • Temperature display in °C or °F • Weekday display in seven languages: English, German, Italian, French, Danish, Dutch, Spanish • Snooze function • Thermometer: Indoor measurement ranges: -9.9°C - 59.9°C • Battery: 1.5V "AA" size x 2pcs (not included)
Important information: • When you insert the batteries all the symbols on the display will briefly light up and you will hear a signal tone. LCD will display for 2 seconds with beeping, then enter RSC reception for seven minutes. • If this automatic setting process is unsuccessful, then use a sharply pointed instrument to press the Reset button on the rear side of the clock.
Manual time setting: • Press and hold down the "SET" button for 2 seconds, the 12/24 hour mode display starts to flash. Now use "A" and "F" buttons to set the correct 12/24 hour mode. • Press "SET" to confirm your setting, the offset display starts to flash. Now use "A" and "F" buttons to set the correct time zone. • Press "SET" to confirm your setting, the Hour display starts to flash. Now use "A" and "F" buttons to set the correct hour. • Press "SET" to confirm your setting, the Minute displays starts to flash. Now use "A" and "F" buttons to set the correct minute. • Press "SET" to confirm your setting, the Year display 2004 starts to flash. Now use "A" and "F" buttons to set the correct year. • Press "SET" to confirm your setting, the Month display starts to flash. Now use "A" and "F" buttons to set the correct month. • Press "SET" to confirm your setting, the Date display starts to flash. Now use "A" and "F" buttons to set the correct date. • Press "SET" to confirm your setting, the language selection for the Weekday display starts to flash. Now use "A" and "F" buttons to select a language. • Press "SET" to confirm your setting and to end the setting procedures, enter the clock mode. Info: • After 30 seconds without pressing any button, the clock switches automatically from set mode to normal time mode.
Setting the daily alarm: To view the set alarm times, under the clock mode, press once ALARM button, LCD displays the "A1" icon. • Press and hold down the ALARM button for 2 seconds until Alarm Time Setting icon is displayed. Now use the "A" and "F" buttons to select the alarm time you require and/or briefly press the ALARM button to set this Alarm time. • The Hour display of the Alarm time starts to flash. Use the "A" and "F" buttons to set the required hour. Press

[pdf] User Manual

EM3333 Manual CN Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x

180 28 Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws

funk wanduhr silber schwarz asset conrad media10 add 160267 c1 es 000672155ML04 |||

WS 8005 Manual Datos tcnicos: DCF-77 Reloj controlado por Radio Tiempo en

formato de 12/24 horas Opcin de ajuste del tiempo manual Configuracin de Zona

Horaria: -12/ 12h Calendario continuo hasta el ao 2054 Visualizacin de fecha y da de

la semana Visualizacin de la temperatura en C o F...

lang:es **score:25** filesize: 99.13 K page_count: 2 document date: 2010-07-22

[pdf] User Manual

EM3333 Manual CN Manuale WS 8005Ora utilizzare i pulsanti △ e ▽ per impostare la modalità 12 24

ore ▷ Il suono d allarme crescente cambia frequenza 4 volte mentre si sente il manual 672155 digitalne

nastenne dcf hodiny techno line ws 8005asset conrad media10 add 160267 c1 it 000672155ML07 manual

8005 |||


Manuale **WS 8005** Dati tecnici: Orologio radio-controllato CF-77 Orario nel formato

12/24 ore Opzione impostazione ora manuale Impostazione Zona Oraria: -12/ 12h

Calendario continuo fino all anno 2054 Visualizzazione data e giorno della settimana

Visualizzazione temperatura in C o F Vi...

lang:it **score:25** filesize: 88.74 K page_count: 2 document date: 2010-07-22

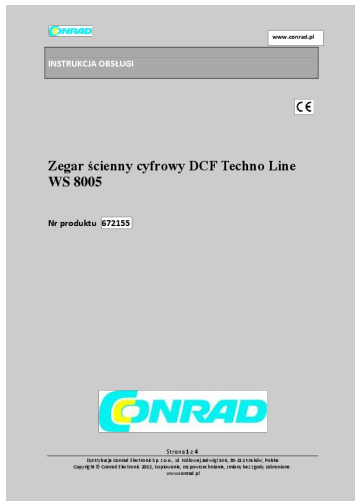


[pdf]

Kejciaczek Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x 180 28 Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws funk wanduhr silber schwarz asset conrad media10 add 160267 c1 pl 000672155ML09 ||| INSTRUKCJA OBSŁUGI www.conrad.pl Zegar cienny cyfrowy DCF Techno Line **WS 8005** Nr produktu 672155 Strona 1 z 4 Dystrybucja Conrad Electronic Sp. z o.o., ul. Krłowej Jadwigi 146, 30-212 Krakw, Polska Copyright Conrad Electronic 2012, Kopiowanie, rozpowszechnianie, zmiany bez zgody zabronione. www.... lang:pl **score:24** filesize: 273.44 K page_count: 4 document date: 2013-03-26


[pdf] User Manual

376 377 0006 0007 0002 0001 0005 000 000a 000n 0000 000c 000z 000N 000s 000t 000e 000h 000o 000d 000i 000y 000W 000S 0008 Docekal Frantisek manual 672155 techno line ws 8005 dcf nastenne hodiny 228 mm x 180 28 stibrna cerna asset conrad media10 add 160267 c1 cs 000672155ML01 ||| Nstnn DCF hodiny **WS 8005** Obj. c.: 67 21 55 Vzen zkaznku, dkujeme Vm za Vasi dvru a za nkup nstnnch DCF hodin **WS 8005**. Tento nvod k obsluze je soust vrobku. Obsahuje dlezit pokyny k uveden vrobku do provozu a k jeho obsluze. Jestlize vrobek pedte jinm osobm, dbejte na to, abyste jim odevzdali i tent... lang:hr **score:24** filesize: 115.88 K page_count: 3 document date: 2012-04-25

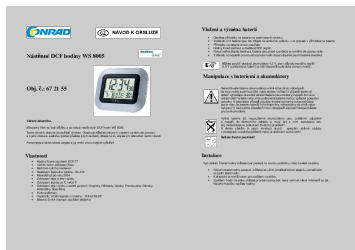


[pdf] User Manual


EM3333 Manual CN Title Author ĩĉ1/āĭġ1/2s*s*s Created Date 8 12 2009 1 45 55 PM AN Techno Line WS 8005 Funk Wanduhr 228 mm x 180 28 Silber Schwarz 672155 an 01 de FUNK WANDUHR asset re in add 160267 c1 000672155ML02 cdn 80 650000 674999 **WS 8005** Funktionen: DCF-77 Funkuhr mit manueller Einstelloption 12/24h Anzeige Zeitzoneneinstellung: -12/ 12h Dauerkalender bis 2054 Datum und Wochentag Anzeige Temperaturanzeige in C oder F Wochentagsanzeige in 7 Sprachen: Englisch, Deutsch, Italienisch, Franzsisch, Dnisch, HolIndisch... lang:de **score:19** filesize: 84.26 K page_count: 2 document date: 2010-07-22

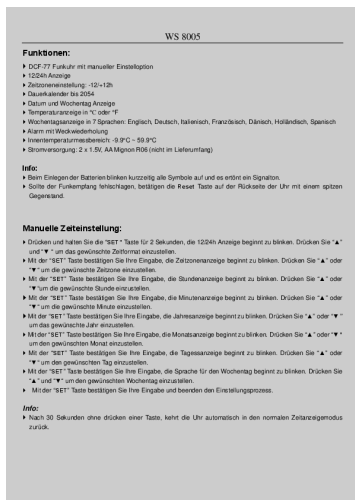

[pdf]

Microsoft Word ku672155 Hirtn 351 M 341nyi lveit Bedienungsanleitung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x 180 28 Silber Schwarz Conrad e B2B on line SLO Trgovina za podjetja! bedienungsanleitung techno ws funk wanduhr silber schwarz asset conrad media10 add 160267 c1 hu 000672155ML06 ||| Falira, **WS 8005** Conrad Szakzlet 1067 Budapest, Terz krt. 23. Tel: 061 302-3588 Conrad Vevszolglat 1124 Budapest, Jagell t 30. Tel: 061 319-0250 Funkcik: Idzna bellts: -12/ 12h Naptr 2054-ig A dtum s a ht napjnak kijelzse Hmrsklet kijelzs C-ban vagy F-ban A ht aktulis napjnak kij... lang:no **score:18** filesize: 69.08 K page_count: 1 document date: 2012-06-29

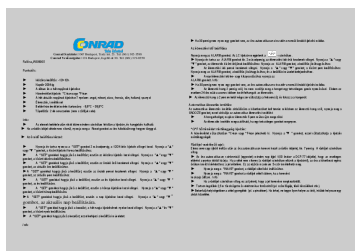



[pdf]

Konformitätserklärung 672155 Techno Line WS 8005 Funk Wanduhr 228 mm x 180 28 Silber Schwarz
Conrad e B2B on line SLO Trgovina za podjetja! konformitaetserklaerung techno ws funk wanduhr silber
schwarz asset conrad media10 add 160267 c1 gl 000672155CC00 |||

...

lang:no score:11 filesize: 1.17 M page_count: 4 document date: 2021-10-29