

Hudson Valley Lighting 1866-PN

Hudson Valley Lighting Jasper 6-Light Chandelier User Manual

Model: 1866-PN

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Hudson Valley Lighting Jasper 6-Light Chandelier, Model 1866-PN. Please read this manual thoroughly before beginning installation and retain it for future reference.

The Jasper chandelier features slender arms with rose-shaped silhouettes and botanically inspired bobeches. It is designed to illuminate a room with direct light while serving as a decorative element. This fixture is suitable for damp locations, making it versatile for various indoor and covered outdoor spaces.

SAFETY INFORMATION

WARNING: Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.

CAUTION: All wiring connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

- Ensure the fixture is securely mounted to a structural element capable of supporting its weight.
- Do not exceed the maximum wattage specified for the bulbs.
- Handle glass components with care to prevent breakage.
- Keep flammable materials away from the light source.
- This fixture is UL certified, ensuring compliance with nationally recognized product safety standards.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Chandelier Body (1)
- Parchment Shades (6)
- Mounting Canopy (1) - 5.25" Diameter
- Chain (1) - 54 inches
- Mounting Hardware Kit (1)
- Instruction Manual (1)



Figure 1: Hudson Valley Lighting Jasper 6-Light Chandelier with black parchment shades and polished nickel finish. The image shows the full chandelier with its six arms extending outwards, each topped with a black shade.

SETUP AND INSTALLATION

Tools Required: Screwdriver, Wire Strippers, Pliers, Electrical Tape, Ladder.

- 1. Turn Off Power:** Before starting, ensure the power supply to the junction box is turned off at the circuit breaker or fuse box.
- 2. Prepare Mounting:** Attach the mounting bracket to the junction box in the ceiling. Ensure it is securely fastened.
- 3. Adjust Chain Length:** Determine the desired hanging height for your chandelier. Use pliers to open and remove chain links as necessary from the 54-inch chain provided.
- 4. Connect Wiring:**
 - Connect the bare copper ground wire from the fixture to the ground wire from the junction box (usually green or bare copper).

- Connect the ribbed or marked fixture wire to the white (neutral) wire from the junction box.
- Connect the smooth or unmarked fixture wire to the black (hot) wire from the junction box.
- Secure all connections with wire nuts and wrap with electrical tape for added safety.

5. **Secure Canopy:** Carefully push the wires into the junction box and slide the canopy up the chain, securing it to the mounting bracket with the provided screws.

6. **Install Shades:** Attach the black parchment shades to each of the six light arms. The shades use a clip attachment method.

7. **Install Bulbs:** Insert six (6) E12 Candelabra base incandescent bulbs (not included) into the sockets. Do not exceed 60 watts per bulb.

8. **Restore Power:** Once installation is complete, turn the power back on at the circuit breaker.

OPERATING INSTRUCTIONS

The Hudson Valley Lighting Jasper Chandelier is designed for simple operation via a standard wall switch (not included). Ensure the light bulbs are correctly installed and the power supply is active.

- **Turning On/Off:** Use the wall switch connected to the chandelier's circuit to turn the light fixture on or off.
- **Bulb Replacement:** To replace a bulb, first turn off the power at the wall switch and then at the circuit breaker. Allow bulbs to cool before touching. Unscrew the old bulb and screw in a new E12 Candelabra base incandescent bulb (max 60W).

MAINTENANCE

Regular cleaning and proper maintenance will ensure the longevity and appearance of your chandelier.

- **Cleaning:** Turn off the power and allow the fixture to cool before cleaning. Wipe the metal parts with a soft, dry cloth. Do not use abrasive cleaners, polishes, or solvents as they may damage the finish.
- **Shade Care:** The parchment shades can be gently dusted with a soft, dry cloth or a feather duster. Avoid using wet cloths or harsh chemicals on the shades.
- **Inspection:** Periodically inspect the wiring and connections for any signs of wear or damage. If any issues are found, disconnect power and consult a qualified electrician.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power to fixture. Loose wire connections. Faulty bulb.	Check circuit breaker/fuse. Verify all wire connections are secure (power off). Replace bulb.
Flickering light.	Loose bulb. Loose wire connection. Incorrect bulb type/wattage.	Tighten bulb. Check wire connections (power off). Ensure correct E12 Candelabra base, max 60W incandescent bulbs are used.

Problem	Possible Cause	Solution
Fixture hums.	Loose components. Incompatible dimmer switch (if applicable).	Ensure all parts are securely fastened. Consult an electrician regarding dimmer compatibility.

SPECIFICATIONS

- Model:** 1866-PN
- Brand:** Hudson Valley Lighting
- Dimensions:** 29" (Width) x 29" (Depth) x 28" (Height)
- Weight:** Approximately 17 pounds
- Finish:** Polished Nickel
- Shade Color:** Black
- Material:** Brass
- Light Source:** Incandescent
- Bulb Base:** E12 Candelabra
- Number of Lights:** 6
- Max Wattage per Bulb:** 60 Watts
- Voltage:** 120 Volts
- Certification:** UL Listed
- Indoor/Outdoor Usage:** Indoor, Outdoor (Damp Location Rated)
- Mounting Type:** Ceiling Mount

WARRANTY AND SUPPORT

For warranty information or technical support, please contact Hudson Valley Lighting directly. Retain your proof of purchase for warranty claims.

Contact Information: Please refer to the official Hudson Valley Lighting website or your purchase documentation for the most current contact details.

Note: This product is subject to Proposition 65 Warning. For more information, please refer to the product packaging or manufacturer's website.



© 2024 Hudson Valley Lighting. All rights reserved.

Related Documents

	<u>Hudson Valley Lighting Bowery 3722 Installation Instructions</u> Detailed installation instructions for the Hudson Valley Lighting Bowery 3722 wall sconce, including safety warnings, parts list, and step-by-step assembly guidance.
--	--

 <p>HOLLY A plug-in picture light with a single light source. It has a rectangular frame with a warm, aged brass finish and a textured, grasscloth-like fabric shade. The light is mounted on a thin, adjustable arm that can be rotated to direct the beam. The base is a simple, rectangular plate with a power cord and a switch.</p> <p>REGAN A plug-in picture light with a single light source. It has a rectangular frame with a warm, aged brass finish and a textured, grasscloth-like fabric shade. The light is mounted on a thin, adjustable arm that can be rotated to direct the beam. The base is a simple, rectangular plate with a power cord and a switch.</p> <p>TOURNU 2913 An adjustable, floor-standing floor lamp. It features a rectangular lamp head with a warm, aged brass finish and a textured, grasscloth-like fabric shade. The lamp is mounted on a tall, slender, tapered base with a power cord and a switch.</p>	<p>Holly Plug-In Picture Light HL263202-AGB/GC by Hudson Valley Lighting</p> <p>Detailed specifications for the Holly plug-in picture light by Hudson Valley Lighting. Features include Aged Brass with Grasscloth finish, dimensions, electrical details, and shipping information.</p>
 <p>REGAN A plug-in picture light with a single light source. It has a rectangular frame with a warm, aged brass finish and a textured, grasscloth-like fabric shade. The light is mounted on a thin, adjustable arm that can be rotated to direct the beam. The base is a simple, rectangular plate with a power cord and a switch.</p>	<p>Regan Picture Light H1068102-AGB - Hudson Valley Lighting</p> <p>Discover the Regan picture light by Hudson Valley Lighting, model H1068102-AGB. This playful light fixture, inspired by Le Corbusier, features an Aged Brass finish and directs light precisely. Specifications include dimensions, electrical details (Integrated LED, 21W max, 2700K color temperature), and shipping information.</p>
 <p>TOURNU 2913 An adjustable, floor-standing floor lamp. It features a rectangular lamp head with a warm, aged brass finish and a textured, grasscloth-like fabric shade. The lamp is mounted on a tall, slender, tapered base with a power cord and a switch.</p>	<p>Hudson Valley Lighting TOURNU 2913 Installation Guide & Safety Information</p> <p>Official installation instructions and safety warnings for the Hudson Valley Lighting TOURNU 2913 lighting fixture. Includes a detailed parts list and step-by-step assembly guide.</p>

Documents - Hudson Valley Lighting – 1866-PN




[pdf] Specifications

1866 PN pd pn delmarfans prodimg lighting hudson valley spec sheet III

Hudson Valley Lighting - Product Specifications

<http://hudsonvalleylighting.com/productSpecifications.aspx> Collectio... CLOSE THIS
WINDOW JASPER CHANDELIER PRODUCT ID: 1866 AVAILABLE FINISHES: AN
Antique Nickel OB Old Bronze PN Polished Nickel DIMENSIONAL INFORMATION
HEIGHT: 28 | EN GTH:...

lang:en score:20 filesize: 94.64 K page_count: 1 document date: 2012-01-17

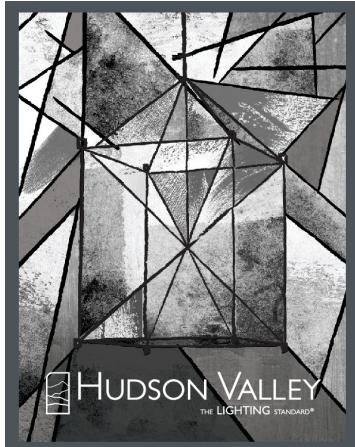

[\[pdf\]](#) Catalog

Hudson Valley Lighting Catalog 2015 media lightingnewyork vendors hvl catalog |||

Fifteen years into the new century, we are still unpacking the wealth of ideas that occurred in the ... d shade lining adds contrast to the Old Bronze finish, drawing out its hand-rubbed brassy accents. **1866-PN** 1860-AN 1860 34.5 D x 32 H mm: 876 x 813 Bulb: 10.60 w/c Canopy: 5.25 D 133mm Shade: 2.5

lang:en score:13 filesize: 100.58 M page_count: 566 document_date: 2015-01-21