

Invision HDTV-L

Invision HDTV-L TV Wall Mount Bracket User Manual

Model: HDTV-L

1. INTRODUCTION

This manual provides detailed instructions for the safe and proper installation, operation, and maintenance of your Invision HDTV-L TV Wall Mount Bracket. This articulating mount is designed for most 26-55 inch LED/LCD/Plasma/4K/3D & Curved Screens, offering tilt and swivel functionality with an ultra-slim 1.8-inch wall profile and a 20-inch articulating arm. Please read all instructions carefully before beginning installation.

2. SAFETY INFORMATION

- **Weight Capacity:** Do not exceed the maximum load capacity of 88 lbs (40 kg).
- **Screen Size:** This mount is suitable for TVs between 26 and 55 inches.
- **VESA Compatibility:** Ensure your TV's VESA mounting pattern is within the range of 100x100mm to 400x400mm.
- **Wall Type:** The mount can be installed on wood stud, brick, or concrete walls. Do not install on drywall alone.
- **Professional Installation:** If you are unsure about the installation process, consult a qualified professional.
- **Tools:** Use appropriate tools and wear safety gear during installation.

3. SETUP AND INSTALLATION


3.1. Before You Begin

Verify that all parts are present and undamaged. Refer to the included hardware list. You will need the following tools (not included): stud finder, level, drill, various drill bits (10mm recommended for masonry), socket wrench, Phillips head screwdriver, and a pencil.

3.2. Check VESA Compatibility

Before mounting, measure the horizontal and vertical distance between the mounting holes on the back of your TV. This mount supports VESA patterns from 100x100mm up to 400x400mm.

TECH SPECS

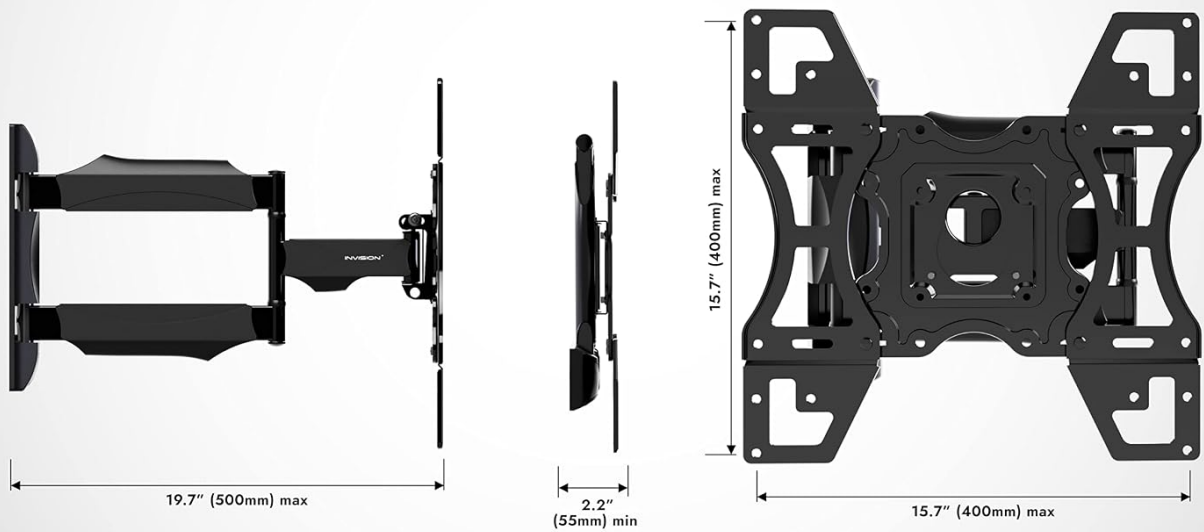

Please check your VESA mounting hole measurements on the back of your monitor before purchase.



Measure the distance between the top 2 mounting holes (centre to centre) for the width



Measure the distance from the top mounting hole to the bottom mounting hole (centre to centre) for the height



This is your VESA



100mm (W) x 100mm (H)
 200mm (W) x 100mm (H)
 100mm (W) x 200mm (H)
 200mm (W) x 200mm (H)
 300mm (W) x 200mm (H)
 400mm (W) x 200mm (H)
 300mm (W) x 300mm (H)
 400mm (W) x 300mm (H)
 400mm (W) x 400mm (H)

Image: This diagram shows different VESA mounting patterns (100x100, 200x100, 200x200, 200x300, 250x400, 200x400, 300x300, 300x400, 400x400) that are compatible with the Invision HDTV-L TV wall mount.

3.3. Attaching TV Brackets to Your TV

1. Carefully place your TV face down on a soft, clean surface.
2. Identify the correct diameter and length of screws (M4, M5, M6, or M8) that fit your TV's mounting holes. Use the provided spacers if necessary to ensure the screws do not bottom out or protrude too far.
3. Attach the two vertical TV brackets to the back of your TV using the selected screws and washers. Ensure they are securely fastened.

THE INVISION DIFFERENCE



INVISION
DESIGN



TRUSTED UK
BRAND



OVER 5 MILLION
CUSTOMERS



HEAVY DUTY
WALLPLATE, INCREASES
STRENGTH & SECURITY



Image: This image provides a rear view of a television with the Invision HDTV-L VESA mounting plate securely attached. It illustrates the connection points for the TV to the mount.

3.4. Mounting the Wall Plate

1. **For Wood Stud Walls:** Use a stud finder to locate the center of two adjacent wood studs. Mark the desired height for the top of your TV. Position the wall plate against the wall, ensuring it is level, and mark the drilling points. Drill pilot holes (approximately 5mm diameter) into the center of the studs. Secure the wall plate using the provided lag bolts and washers.
2. **For Concrete/Brick Walls:** Mark the desired height and drilling points for the wall plate. Use a 10mm masonry drill bit to drill holes to the specified depth. Insert the concrete anchors flush with the wall surface. Position the wall plate, ensure it is level, and secure it using the provided lag bolts and washers.

READY FOR ANYTHING



HEAVY DUTY
STEEL



UNIQUE COMPRESSION
HINGE ELIMINATES
DEFLECTION



LOAD CAPACITY 40KG



SOLID & RELIABLE
TILT LOCKING MECHANISM


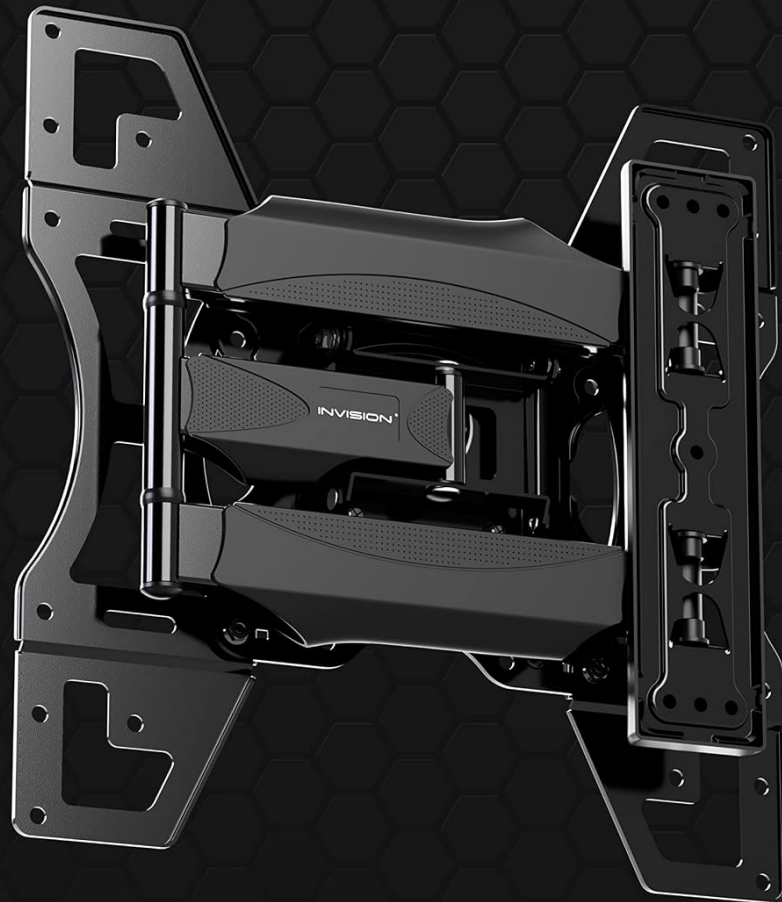


Image: The image shows the Invision HDTV-L wall mount installed on a wall, with the articulating arm folded. This is the state of the mount before the television is attached.

3.5. Hanging the TV

1. With assistance, carefully lift the TV with the attached brackets and hook the brackets onto the wall plate.
2. Ensure the TV is securely seated on the wall plate.
3. Locate the locking screws at the bottom of the TV brackets and tighten them to secure the TV to the wall plate, preventing accidental dislodgement.

ADAPT AND OVERCOME

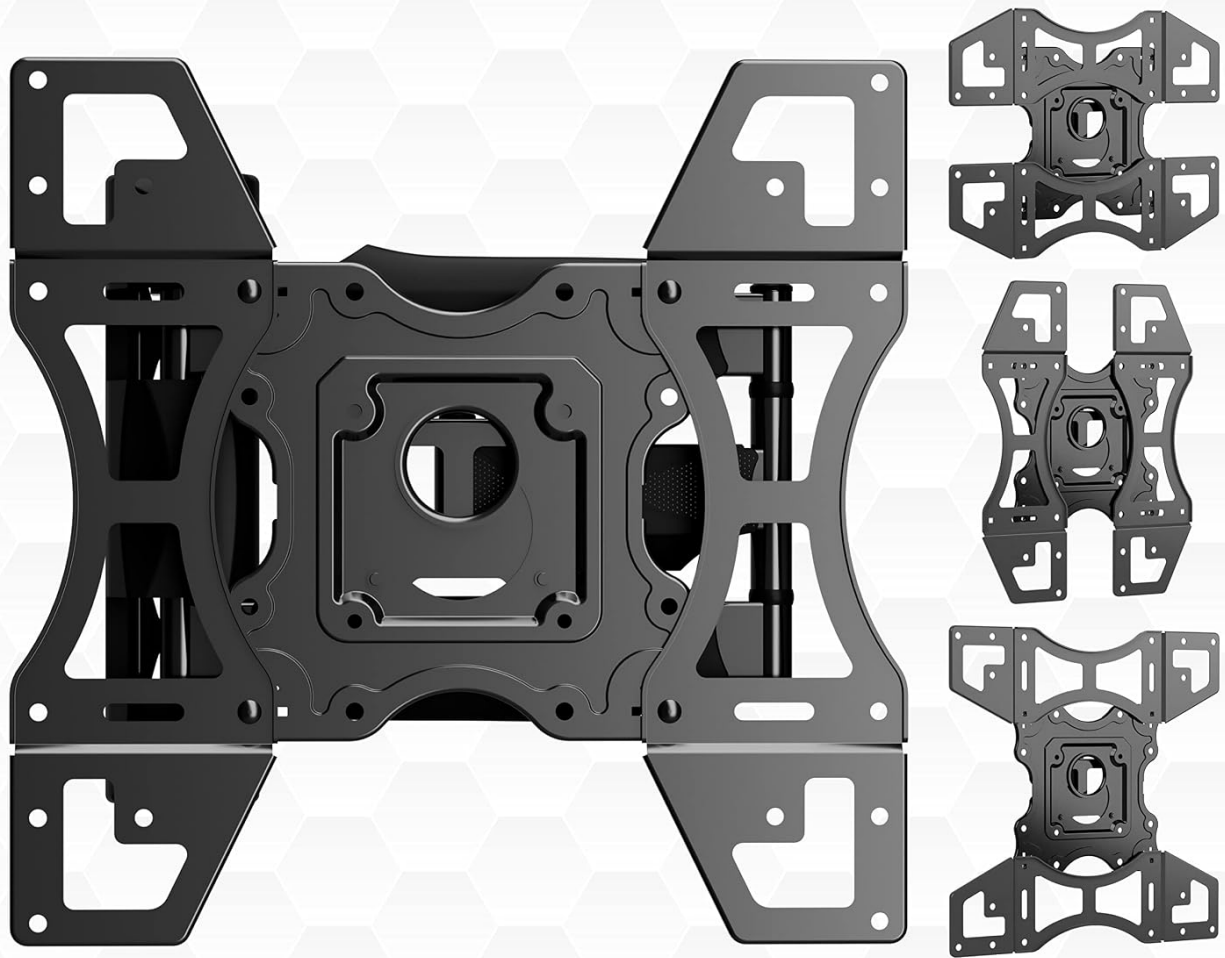

VESA Compatibility
100mm - 400mm

Image: This image depicts a television successfully mounted on the Invision HDTV-L wall mount, extended from the wall. It demonstrates the mount's functionality with a TV in place.

4. OPERATING THE MOUNT

The Invision HDTV-L mount offers flexible viewing options:

- **Extension:** The articulating arm allows the TV to extend up to 500mm (19.7 inches) from the wall.
- **Swivel:** The TV can be swiveled up to 180 degrees left or right, depending on TV size and wall clearance.
- **Tilt:** Adjust the vertical viewing angle with a tool-free tilting action, allowing for +10° tilt down and -2° tilt up.
- **Cable Management:** Utilize the integrated cable management clips on the articulating arm to route and organize your cables for a tidy appearance.

EXPERIENCE BETTER

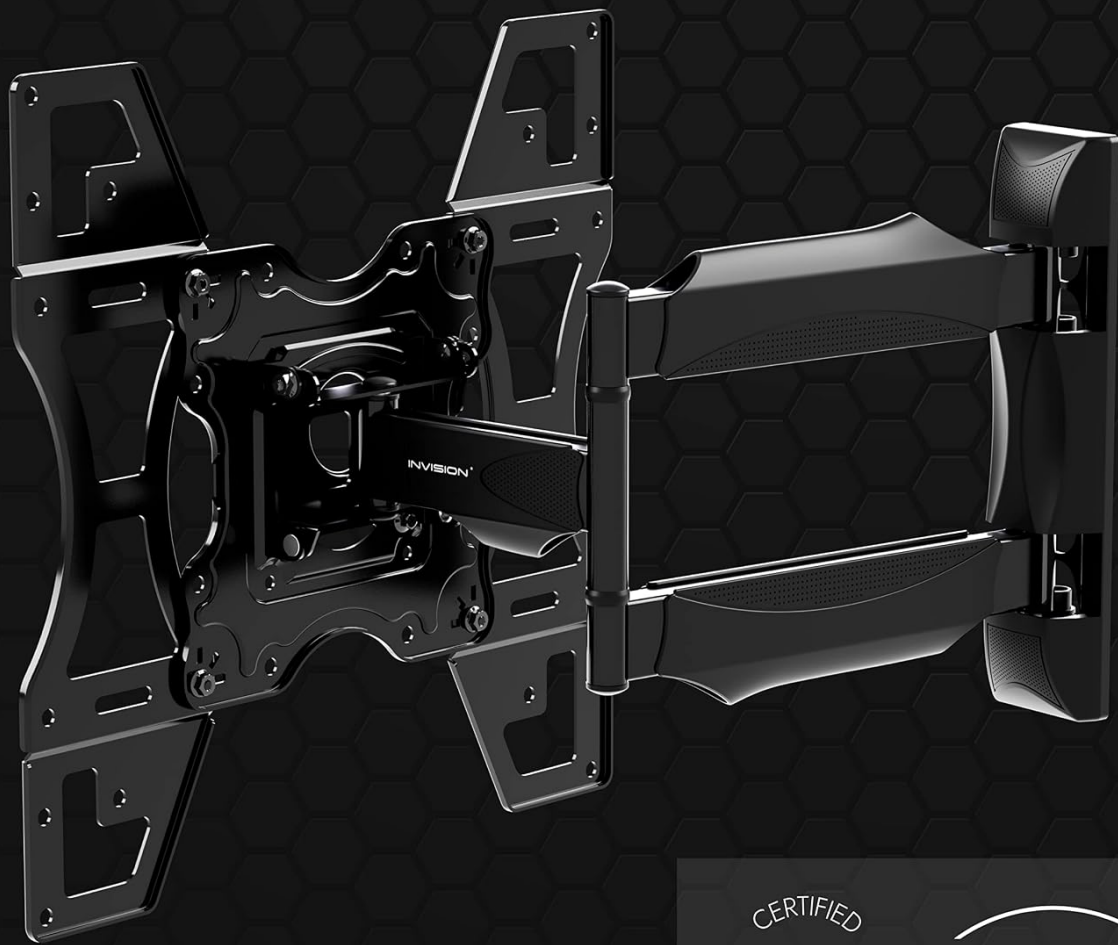


Image: This image displays the Invision HDTV-L TV wall mount in its fully extended position, highlighting the articulating arm and the VESA compatible TV plate. It demonstrates the range of motion and robust construction.

5. MAINTENANCE

- **Regular Checks:** Periodically check all screws and connections to ensure they remain tight and secure.
- **Cleaning:** Clean the mount with a soft, dry cloth. Avoid abrasive cleaners or solvents that could damage the finish.
- **Lubrication:** The articulating joints are designed for smooth operation and generally do not require lubrication. If movement becomes stiff, contact customer support.

6. TROUBLESHOOTING

- **TV Not Level:** If the TV appears unlevel after installation, use the built-in leveling adjustment feature (if applicable) or slightly loosen the mounting screws on the TV brackets, adjust, and re-tighten.
- **Mount Feels Loose:** Re-check all wall anchors and TV attachment screws. Ensure they are tightened to the

appropriate torque. Do not overtighten.

- **Difficulty Moving Arm/Tilt:** Check for any obstructions. Ensure no cables are snagged. The tool-free tilt mechanism should operate smoothly; if it's too stiff or too loose, check the tension adjustment (if available) or contact support.

7. SPECIFICATIONS

Feature	Specification
Model Number	HDTV-L
Compatible TV Sizes	26-55 inches
Maximum Load Capacity	88 lbs (40 kg)
VESA Compatibility	100x100mm to 400x400mm
Wall Profile (Closed)	46mm (1.8 inches)
Maximum Extension	500mm (19.7 inches)
Tilt Angle	+10° (down) / -2° (up)
Swivel Angle	180° (left/right)
Material	Metal
Product Dimensions (Mount)	18 x 12 x 2.5 inches
Item Weight	10.12 pounds

FRONT ROW EXPERIENCE



Image: A detailed technical drawing of the Invision HDTV-L TV wall mount, including maximum extension (19.7 inches), minimum wall distance (2.2 inches), and VESA compatibility measurements (100mm to 400mm). It also outlines three steps to check VESA mounting holes.

8. WARRANTY

The Invision HDTV-L TV Wall Mount Bracket is covered by a **25-year warranty** on all parts. This warranty ensures coverage against manufacturing defects and material flaws under normal use. Please retain your proof of purchase for warranty claims.

9. CUSTOMER SUPPORT

For further assistance, technical support, or warranty inquiries, please contact Invision customer service. Refer to the contact information provided with your product packaging or visit the official Invision website for support resources.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question