

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Progress Lighting](#) /

› [Progress Lighting Inspire Collection 9-Light Traditional Chandelier P4638-09 Instruction Manual](#)

Progress Lighting P4638-09

Progress Lighting Inspire Collection 9-Light Traditional Chandelier P4638-09 Instruction Manual

Model: P4638-09

INTRODUCTION

This manual provides detailed instructions for the safe and proper installation, operation, and maintenance of your Progress Lighting Inspire Collection 9-Light Off-White Linen Shade Traditional Chandelier in Brushed Nickel. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Image: The Inspire Collection 9-Light Chandelier featuring a brushed nickel finish and off-white linen shades.

SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always turn off the main power supply at the circuit breaker before installation, removal, or servicing. This product requires professional installation. Always consult a qualified electrician if you are unsure about the installation process.

Proposition 65 Warning: This product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

- Ensure all electrical connections are in accordance with local codes and ordinances.
- Use only the specified bulb type and wattage to avoid overheating.
- Do not hang anything from the fixture.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Chandelier fixture assembly
- 9 Off-white linen shades
- Ceiling chain (6 feet of 9 gauge chain supplied)
- Electrical wiring
- Mounting hardware (may require additional screws not included)
- Installation Sheet

SETUP & INSTALLATION

Professional installation is recommended for this chandelier. Follow these general steps, referring to the included installation sheet for specific details.

1. Prepare for Installation

1. Turn off power at the circuit breaker.
2. Carefully unpack the fixture and components.
3. Determine the desired hanging height. For an 8-foot ceiling, the bottom of the chandelier should be 30-36 inches above a dining table. For higher ceilings, divide the vertical space into thirds and position the chandelier two-thirds of the distance from the floor, ensuring at least 7 feet of clearance from the floor in areas where people walk underneath.

2. Mount the Fixture

1. Attach the mounting bracket to the junction box in the ceiling.
2. Adjust the chain length as needed. The supplied chain is 6 feet long.
3. Thread the electrical wires through the chain and canopy.

3. Electrical Connections

1. Connect the fixture's ground wire to the ground wire from the junction box.
2. Connect the fixture's 'white or identified' wire (often with ridges) to the white (neutral) wire from the junction box.
3. Connect the fixture's 'plain or black' wire to the black (hot) wire from the junction box.
4. Secure all connections with wire nuts and electrical tape.

4. Final Assembly

1. Secure the canopy to the ceiling.
2. Install 9 candelabra-shaped bulbs (E26 base, maximum 60 watts each). Note: Only candelabra-shaped bulbs can be used with the shades.
3. Attach the off-white linen shades to each light socket.
4. Restore power at the circuit breaker.

Visual Installation Guide

Your browser does not support the video tag.

Video: A comprehensive overview of chandelier installation by Progress Lighting, demonstrating key steps and considerations for proper setup.

Product Dimensions

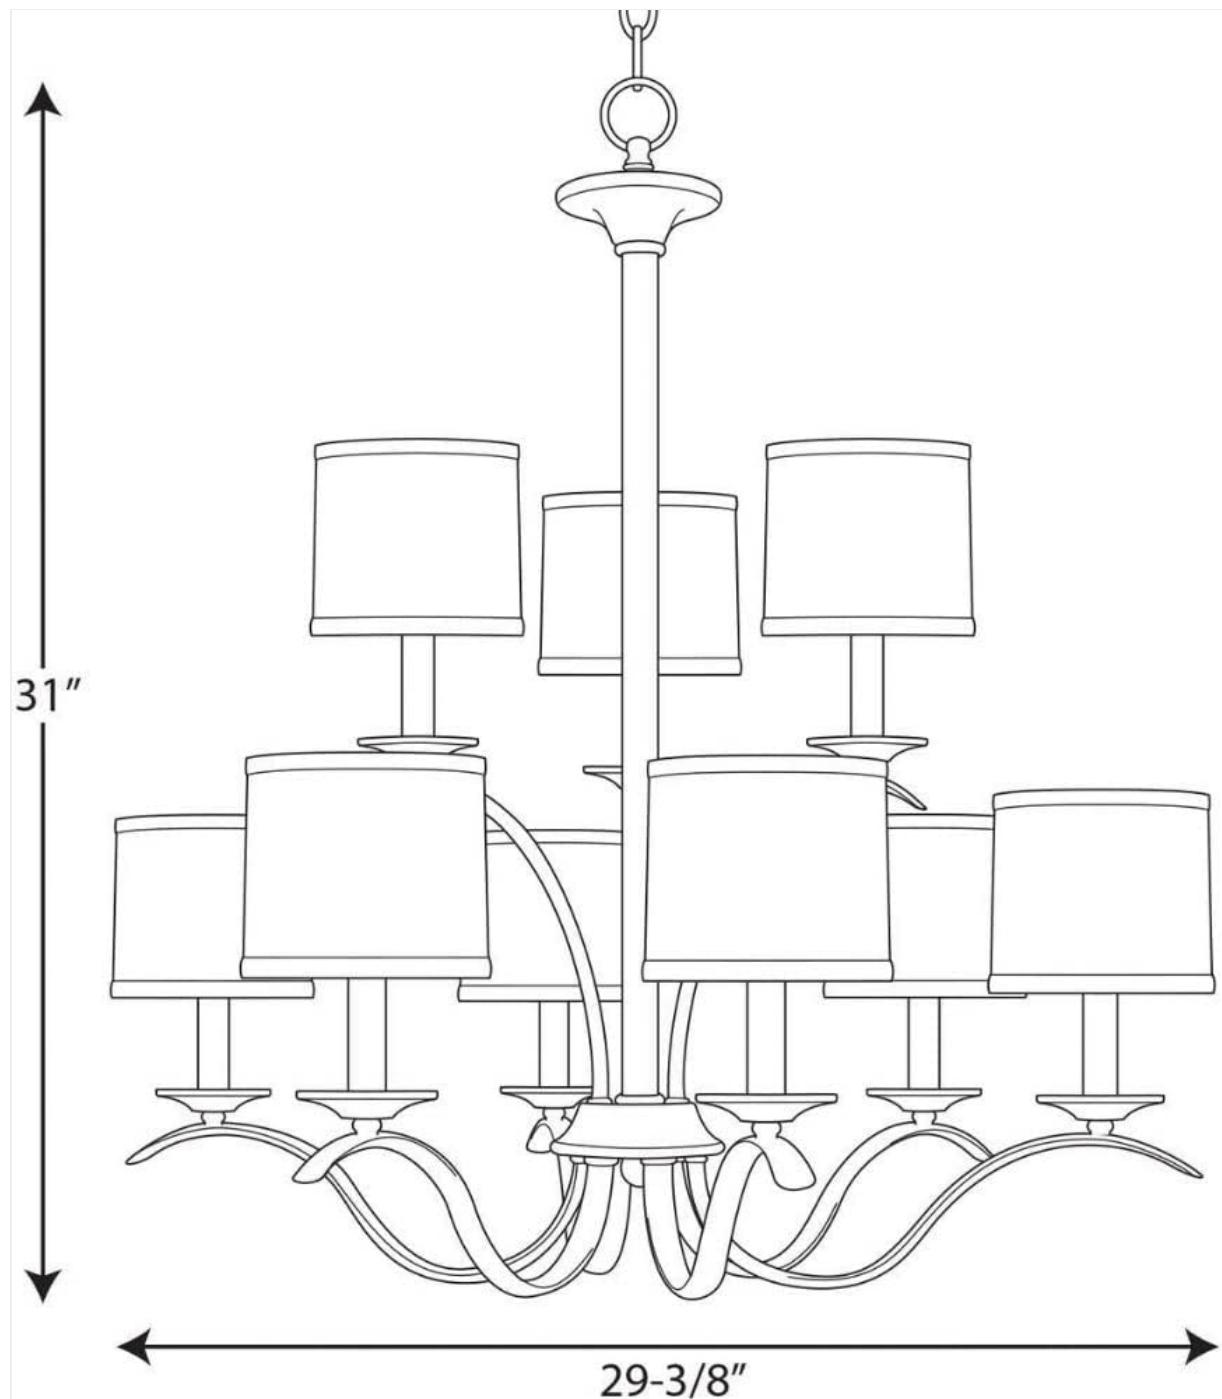


Image: Dimensional drawing of the chandelier, indicating a width of 29.38 inches and a height of 31 inches.

OPERATING INSTRUCTIONS

Once properly installed, your chandelier can be operated using a standard wall switch. If your electrical setup includes a dimmer switch, ensure it is compatible with incandescent bulbs for optimal performance.

The fixture's switch type is listed as 'Pull Chain' in some specifications, however, the primary control is typically via a wall switch for chandeliers of this design. Please refer to your specific home wiring and switch setup.

MAINTENANCE

Cleaning

- Always turn off power before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use abrasive cleaners or solvents as they may damage the finish.

- The linen shades can be gently dusted or spot cleaned with a damp cloth if necessary.

Bulb Replacement

- Ensure power is off and bulbs have cooled before replacing.
- Unscrew old bulbs and screw in new E26 candelabra-shaped bulbs.
- Do not exceed the maximum wattage of 60 watts per bulb.

TROUBLESHOOTING

If your chandelier is not functioning correctly, refer to the following common issues:

- **No Light:** Check the circuit breaker, ensure bulbs are securely screwed in, and verify all electrical connections are tight.
- **Flickering Lights:** Ensure bulbs are fully tightened. If using a dimmer, confirm it is compatible with the bulb type and that the bulbs are dimmable.
- **Loose Fixture:** Re-check mounting hardware and ensure it is securely fastened to the ceiling junction box.

If issues persist, consult a qualified electrician.

SPECIFICATIONS

Brand	Progress Lighting
Model Name	Inspire
Part Number	P4638-09
Color	Brushed Nickel
Material	Alloy Steel
Shade Material	Linen
Style	Transitional
Light Fixture Form	Chandelier
Product Dimensions	29.38" L x 29.38" W x 31" H
Item Weight	15 Pounds
Number of Light Sources	9
Bulb Base	E26
Wattage	60 watts (per bulb)
Voltage	120 Volts
Indoor/Outdoor Usage	Indoor
Special Feature	UL Listed

WARRANTY INFORMATION

This Progress Lighting product is covered by a **1-year Limited Warranty**. This warranty guarantees your complete

satisfaction with your purchase and includes professional after-sales customer service support. Please retain your proof of purchase for warranty claims.

CUSTOMER SUPPORT

For further assistance, technical support, or warranty inquiries, please visit the official Progress Lighting website or contact their customer service department. Refer to the packaging or the Progress Lighting website for current contact information.