

ALFAJR CT-11

ALFAJR Desk Travel Automatic Azan Athan Prayer Clock CT-11 User Manual

Model: CT-11 | Brand: ALFAJR



INTRODUCTION

The ALFAJR CT-01 Azan Clock is designed to provide accurate prayer times and Azan sounds for users worldwide. This manual provides comprehensive instructions for setting up, operating, and maintaining your clock to ensure optimal performance.

Key features of your ALFAJR CT-11 clock include:

- High-quality digital Azan sound for all prayers, including complete Fajr Azan, with adjustable volume control.
- Accurate prayer time calculation for cities globally, supporting various Taqweem systems (Islamic World Organization, Taqweem Um Al-Qura, Altaqweem Almasri, Islamic Scientific University, Islamic Society of North America, Fixed Time).
- Daily alarm function.
- Qibla direction indicator.
- Hijri and Gregorian Calendar display.
- Temperature display.
- Gentle prayer reminders (when Azan sound is off).
- Daylight Saving Time (DST) option.
- Five high-quality Azan sounds (Makkah, Madinah, Quds, Egypt, Riyadh).
- Wide viewing angle LCD.
- DC 6 Volts external input option.



Figure 1: Front view of the ALFAJR CT-11 Azan Clock, displaying time, date, and prayer information.

SETUP GUIDE

1. Powering the Clock

The ALFAJR CT-11 clock operates on 2 AA batteries (not included) or can be powered via a DC 6 Volts external input (power adapter cable not included).

Battery Installation:

1. Locate the battery compartment on the bottom of the clock.
2. Open the battery compartment cover.
3. Insert 2 AA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover securely.

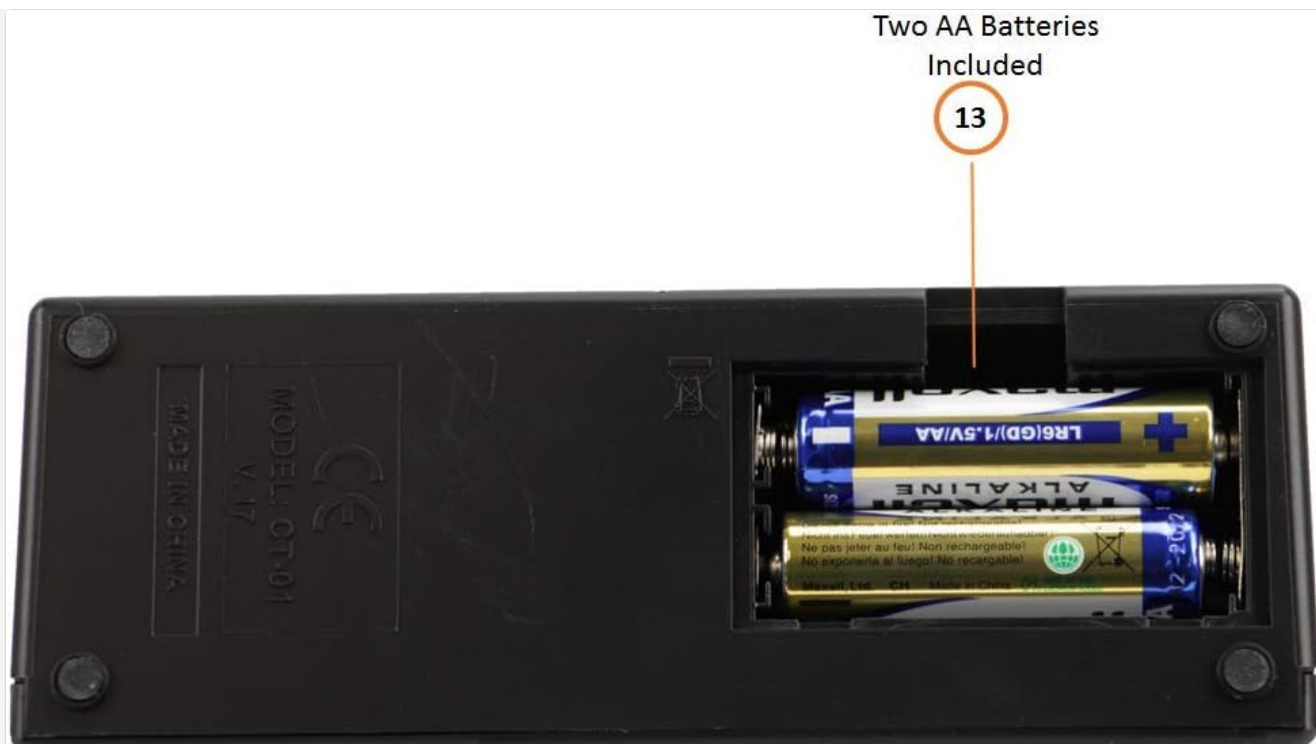


Figure 2: Bottom view of the clock, illustrating the battery compartment (labeled 13 in some diagrams).

2. Initial Settings

Upon first power-on or after a reset, the clock will prompt you to set the basic parameters.



Figure 3: Front controls of the ALFAJR CT-11 Azan Clock. Key controls include Light/Stop (1), Azan Sound Selector (2), UP button (3), SET button (4), DOWN button (5), and LCD Display (6).



Figure 4: Back controls of the ALFAJR CT-11 Azan Clock. Key controls include Alarm Snooze (7), Prayer Alarm (8), Daily Alarm (9), Azan Volume Switch (10), Micro USB Port (11), and Reset (12).

Setting Current Time and Date:

1. Press the **SET** button (4) to enter the setting mode.
2. Use the **UP** (3) and **DOWN** (5) buttons to adjust the hour, then press **SET** to confirm and move to minutes. Repeat for minutes, year, month, and day.
3. Continue pressing **SET** to cycle through settings until the time and date are correctly configured.

Setting City and Taqweem System:

The clock calculates prayer times based on your selected city and Taqweem system.

1. In setting mode, navigate to the city selection.
2. Use the **UP** and **DOWN** buttons to select your city. The clock has a pre-programmed list of major cities.
3. After selecting the city, you will be prompted to choose a Taqweem system. Select the system most widely used in your region (e.g., Islamic World Organization, Um Al-Qura, ISNA).
4. Press **SET** to confirm.

Daylight Saving Time (DST) Setting:

If your region observes Daylight Saving Time, enable this feature.

1. In setting mode, navigate to the DST option.
2. Use the **UP** or **DOWN** button to toggle DST on or off.
3. Press **SET** to confirm.

OPERATING INSTRUCTIONS

Azan and Prayer Times

The clock automatically displays prayer times and plays the Azan at the calculated times for your selected city.

- **Azan Volume Control:** Use the Azan Volume Switch (10) located at the back of the clock to adjust the loudness of the Azan.
- **Azan Sound Selection:** Rotate the Azan Sound Selector (2) on the front of the clock to choose from five different Azan voices (Makkah, Madinah, Quds, Egypt, Riyadh, or Random).
- **Prayer Reminders:** If the Azan sound is turned off, the clock can provide gentle prayer reminders.



Figure 5: Display features of the ALFAJR CT-11 Azan Clock, including temperature, DST indicator, low battery indicator, Qibla direction, moon age, Micro USB power socket, Azan sound options, prayer reminders, language options, and calendar types.

Alarm Functions

The clock features multiple alarm types:

- **Daily Alarm (9):** A regular alarm that can be set for any time. Use the switch on the back to enable/disable.
- **Prayer Alarm (8):** An alarm specifically for prayer times. Use the switch on the back to enable/disable.
- **Alarm Snooze (7):** When an alarm sounds, press the Light/Stop button (1) on the front to snooze the alarm for a short period. Use the switch on the back to enable/disable the snooze function.

Other Functions

- **Qibla Direction:** The clock displays the Qibla direction relative to North, assisting in prayer orientation.
- **Temperature Display:** The LCD shows the ambient temperature in Celsius or Fahrenheit.
- **Language Selection:** The clock supports both Arabic and English languages for display.
- **Light/Stop Button (1):** Press this button to illuminate the display or to stop an active Azan or alarm.

MAINTENANCE

- **Cleaning:** Wipe the clock with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Battery Replacement:** Replace batteries when the low battery indicator appears on the display or when the clock's functions become erratic. Always use new AA batteries and dispose of old batteries responsibly.
- **Storage:** If storing the clock for an extended period, remove the batteries to prevent leakage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Clock display is blank or dim.	Low or dead batteries; incorrect battery installation; no external power.	Replace batteries with new ones, ensuring correct polarity. Connect to a DC 6V power source if available.
Azan sound is too low or not playing.	Azan volume switch is set too low; Azan sound is turned off; clock not set to correct prayer time.	Adjust the Azan Volume Switch (10) on the back of the clock. Ensure Azan sound is enabled in settings. Verify city and Taqweem settings are correct.
Incorrect prayer times displayed.	Incorrect city or Taqweem system selected; DST setting is wrong.	Re-enter setting mode and verify your city and Taqweem system. Check and adjust the DST setting if applicable.
Clock loses time or gains time.	Low batteries; environmental factors.	Replace batteries. If the issue persists, perform a reset (12) and reconfigure.
Buttons are unresponsive.	Temporary software glitch; low batteries.	Remove and reinsert batteries. If issue persists, use the Reset button (12) on the back of the clock.

SPECIFICATIONS

Brand	ALFAJR
Model Number	CT-11 (also referred to as CT-01)
Color	Dark Gray
Display Type	Digital
Special Feature	Daylight Saving
Product Dimensions	6.25"W x 3.25"H (approx. 15.88 cm W x 8.26 cm H)
Power Source	Corded Electric (DC 6 Volts external input) or 2 AA Batteries
Material	Plastic
Item Weight	0.66 Pounds (approx. 10.6 ounces / 300 grams)
Batteries Required	2 AA batteries (not included)
Alarm Clock	Yes (Daily Alarm, Prayer Alarm)

Operation Mode	Automatic
Mounting Type	Tabletop

WARRANTY INFORMATION

The manufacturer provides a 2-year warranty from the date of purchase. For North American customers, warranty coverage is handled by an authorized North American distributor.

The warranty covers defects in material and workmanship only. If the clock can be repaired, it will be repaired and returned after testing. If a repair is not possible, a replacement will be issued. Warranty fees may apply.

The warranty does **NOT** cover:

- Fair wear and tear.
- Willful damage, abnormal storage or working conditions, accident, or negligence.
- Failure to operate or use the products in accordance with the user instructions.
- Any alteration or repair by you or by a third party.
- Theft or loss of the product.

To proceed with a warranty claim, a valid proof of purchase is required.

SUPPORT

For further assistance, technical support, or warranty claims, please contact the authorized ALFAJR distributor in your region or refer to the contact information provided with your purchase documentation.

Always refer to the official ALFAJR website or your local distributor for the most up-to-date information and support resources.



© 2024 ALFAJR. All rights reserved.