Globe Electric 64413

Globe Electric 64413 Amaris 1-Light Plug-in Pendant Instruction Manual

Model: 64413

Introduction

Thank you for choosing the Globe Electric 64413 Amaris 1-Light Plug-in Pendant. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.

Safety Information

WARNING: To reduce the risk of fire, electric shock, or personal injury, always follow these safety guidelines:

- Ensure the power is disconnected before installation, cleaning, or replacing the bulb.
- This product is designed for **indoor use only**. Do not expose to water or moisture.
- Use only one (1) E26 (medium base) bulb, with a maximum wattage of 60W. Exceeding the recommended wattage can cause overheating and damage to the fixture or create a fire hazard.
- Do not modify the electrical cord or plug. If the cord is damaged, the fixture should not be used.
- Keep flammable materials away from the light bulb when in operation.
- Ensure the fixture is securely mounted using the provided hardware to prevent it from falling.

Package Contents

Verify that all components are present before beginning installation:

- 1 x Amaris 1-Light Plug-in Pendant (Brushed Steel finish, Frosted White Shade)
- Mounting Hardware (swag hooks, anchors, screws)
- Instruction Sheet (this document)

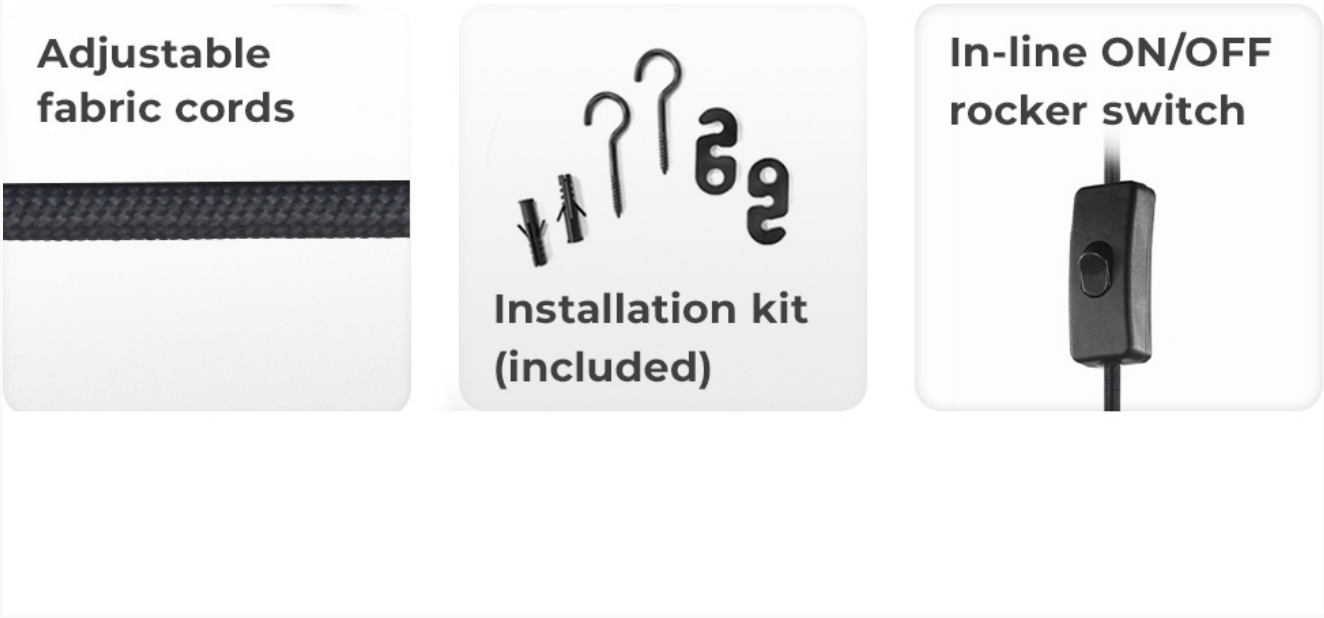


Image: Included mounting hardware and in-line on/off switch.

Setup and Installation

The Globe Electric 64413 Amaris Plug-in Pendant is designed for easy installation without the need for hardwiring. Follow these steps:

1. **Choose Location:** Select a suitable indoor location for your pendant light. Consider the 15-foot cord length for reaching an electrical outlet.
2. **Mark Mounting Points:** Determine the desired hanging height and position. Mark the locations on your ceiling or wall where the swag hooks will be installed. The pendant can be hung from a sloped or vaulted ceiling.
3. **Install Swag Hooks:** Drill pilot holes at the marked locations. Insert the plastic anchors (if installing into drywall) and then screw the swag hooks firmly into place.
4. **Insert Bulb:** Carefully screw one E26 medium base bulb (maximum 60W, sold separately) into the socket of the pendant light.
5. **Hang Pendant:** Drape the 15-foot clear cord over the installed swag hooks to achieve your desired hanging length and aesthetic. The cord is adjustable, allowing for a maximum hanging length of 189 inches and a minimum of 8 inches.
6. **Plug In:** Once the pendant is securely hung and the bulb is installed, plug the power cord into a standard electrical outlet.



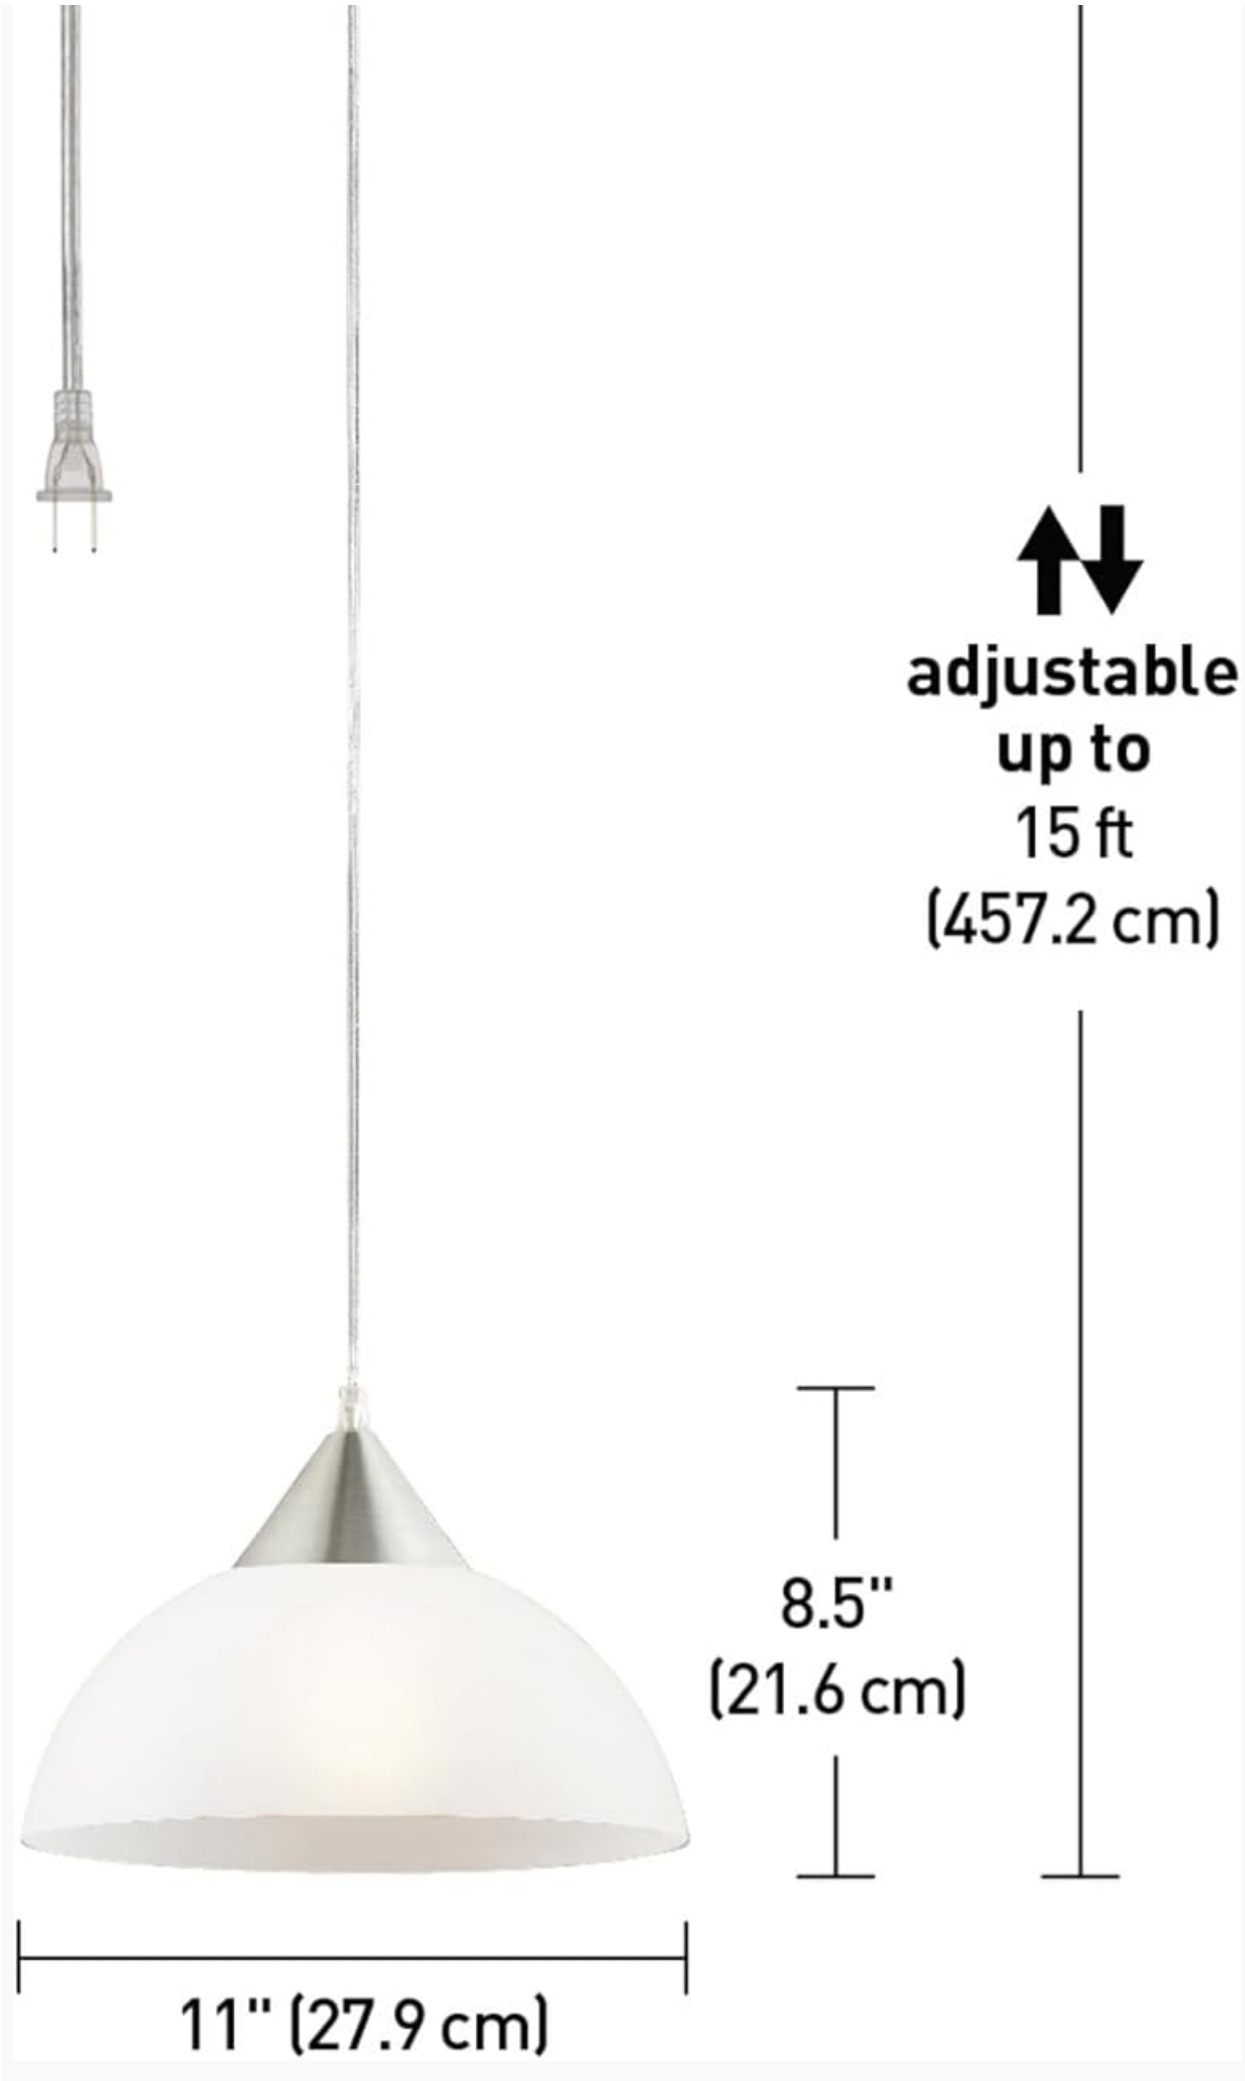

adjustable
up to
15 ft
(457.2 cm)
8.5"
(21.6 cm)
11" (27.9 cm)

Image: Diagram illustrating the adjustable 15-foot cord and the pendant's dimensions (11 inches wide, 8.5 inches high).



Image: Example of the pendant light installed in a bedroom setting.

Operation

Your Amaris Plug-in Pendant features an in-line on/off switch for convenient control.

- **Turning On/Off:** Locate the in-line switch on the power cord. Press the switch to toggle the light on or off.
- **Dimming (Optional):** This fixture is fully dimmable when used with a compatible dimmer switch and a dimmable E26 bulb (both sold separately). If you wish to use a dimming function, ensure both components are compatible.



Image: Close-up of the pendant light, highlighting the frosted white shade and brushed steel components.



Image: Various E26 bulb types, including incandescent, LED, and smart bulbs, suitable for use with the pendant.

Maintenance

Regular maintenance ensures the longevity and optimal performance of your pendant light.

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or shade.
- **Bulb Replacement:** Ensure the fixture is unplugged and the bulb has cooled completely before attempting to replace it. Unscrew the old bulb and screw in a new E26 medium base bulb (maximum 60W).

Troubleshooting

If you encounter issues with your pendant light, refer to the following common solutions:

Problem	Possible Cause	Solution
Light does not turn on.	1. Power cord not plugged in. 2. Bulb is loose or burnt out. 3. Wall outlet has no power. 4. In-line switch is off.	1. Ensure the plug is fully inserted into a working outlet. 2. Tighten or replace the bulb. 3. Test the outlet with another device or check your circuit breaker. 4. Ensure the in-line switch is in the 'ON' position.
Light flickers.	1. Loose bulb. 2. Incompatible dimmer switch/bulb. 3. Faulty bulb.	1. Tighten the bulb. 2. Ensure both dimmer and bulb are compatible and rated for dimming. 3. Replace the bulb.

Problem	Possible Cause	Solution
Shade appears warped.	1. Heat from an incandescent bulb. 2. Shipping deformation.	1. Use an LED bulb to reduce heat. Ensure bulb wattage does not exceed 60W. 2. In some cases, placing the shade in warm sunlight for a period may help it regain its shape.

Specifications

- **Model Number:** 64413
- **Brand:** Globe Electric
- **Color:** Brushed Steel
- **Shade Color:** Frosted White
- **Material:** Metal (fixture), Plastic (shade)
- **Style:** Minimalist
- **Light Fixture Form:** Pendant
- **Room Type:** Bedroom, Dining Room, Entryway, Kitchen
- **Indoor/Outdoor Usage:** Indoor
- **Power Source:** Corded Electric (Plug-in)
- **Bulb Base:** E26 Medium
- **Max Wattage:** 60 Watts
- **Voltage:** 120 Volts
- **Cord Length:** 15 feet (adjustable)
- **Item Dimensions (L x W x H):** 11" x 11" x 8.5"
- **Item Weight:** 18.14 g
- **Switch Type:** In-line On/Off (Toggle)
- **Installation Type:** Plug-in
- **Certification:** ETL

Warranty and Support

This Globe Electric product is covered by a**2-year manufacturer warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.
For warranty claims, technical support, or replacement parts, please contact Globe Electric customer service. Keep your proof of purchase for warranty validation.
Contact Information: Please refer to the Globe Electric official website or product packaging for the most current customer support contact details.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question