Bajaj FX 11

Bajaj Food Factory FX 11 Food Processor User Manual

Model: FX 11

1. Important Safety Instructions

Please read all instructions carefully before using your Bajaj Food Factory FX 11 Food Processor. Retain this manual for future reference.

- Always ensure the appliance is unplugged from the power outlet before assembling, disassembling, or cleaning.
- Do not immerse the motor unit in water or any other liquid. Clean with a damp cloth only.
- Keep hands and utensils away from moving blades during operation to prevent injury. Always use the food pusher provided.
- Ensure all parts are correctly assembled and locked into place before operating the appliance. The safety lock feature prevents operation if not properly secured.
- Do not operate the appliance with a damaged cord or plug, or if it malfunctions or has been dropped or damaged. Contact authorized service personnel.
- This appliance is for household use only. Do not use outdoors.
- Supervise children closely when the appliance is in use.
- Avoid contact with moving parts.

2. Product Overview

The Bajaj Food Factory FX 11 is a versatile 600-watt food processor designed to simplify various kitchen tasks. It features a powerful 18000 RPM motor with 3-speed control and a pulse function for efficient processing.

Key Features:

- Sturdy and powerful 600 Watts, 18000 RPM motor.
- 3 speed control with pulse function.
- Efficient processing, grinding, liquidizing, juicing, and atta kneading.
- Unbreakable polycarbonate processing bowl with lid.
- 1.5 litre unbreakable polycarbonate liquidizing jar with stainless steel blade.
- 1.0 litre stainless steel grinding jar with multi-function stainless steel blade.
- Integrated safety lock mechanism.

Components:

The food processor comes with various attachments to perform multiple functions:

- Motor Unit
- Processing Bowl with Lid
- Liquidizing Jar (1.5L)
- Grinding Jar (1.0L)
- Multi-function Stainless Steel Blades
- Various Processing Blades (chopping, grating, slicing, shredding)
- Centrifugal and Citrus Juicer Attachments
- Dough Kneading Blade



Image: Bajaj Food Factory FX 11 Food Processor with its main jars and attachments.



Image: Close-up of various processing blades and juicer attachments.



Image: Additional blades for grating and shredding tasks.

3. Setup and Assembly

Before first use, unpack all components and wash all removable parts (jars, lids, blades) with warm soapy water. Rinse thoroughly and dry. Wipe the motor unit with a damp cloth.

General Assembly Steps:

1. Place the motor unit on a stable, flat, and dry surface.
2. Select the appropriate jar or processing bowl for your task.
3. Attach the desired blade or attachment inside the chosen jar/bowl.
4. Carefully place the assembled jar/bowl onto the motor unit, ensuring it locks securely into position. The appliance will not operate if not correctly locked.
5. Place the lid onto the jar/bowl and twist to lock it. Ensure the lid is also securely locked for the safety mechanism to engage.
6. Plug the appliance into a suitable power outlet. The power indicator light will illuminate.

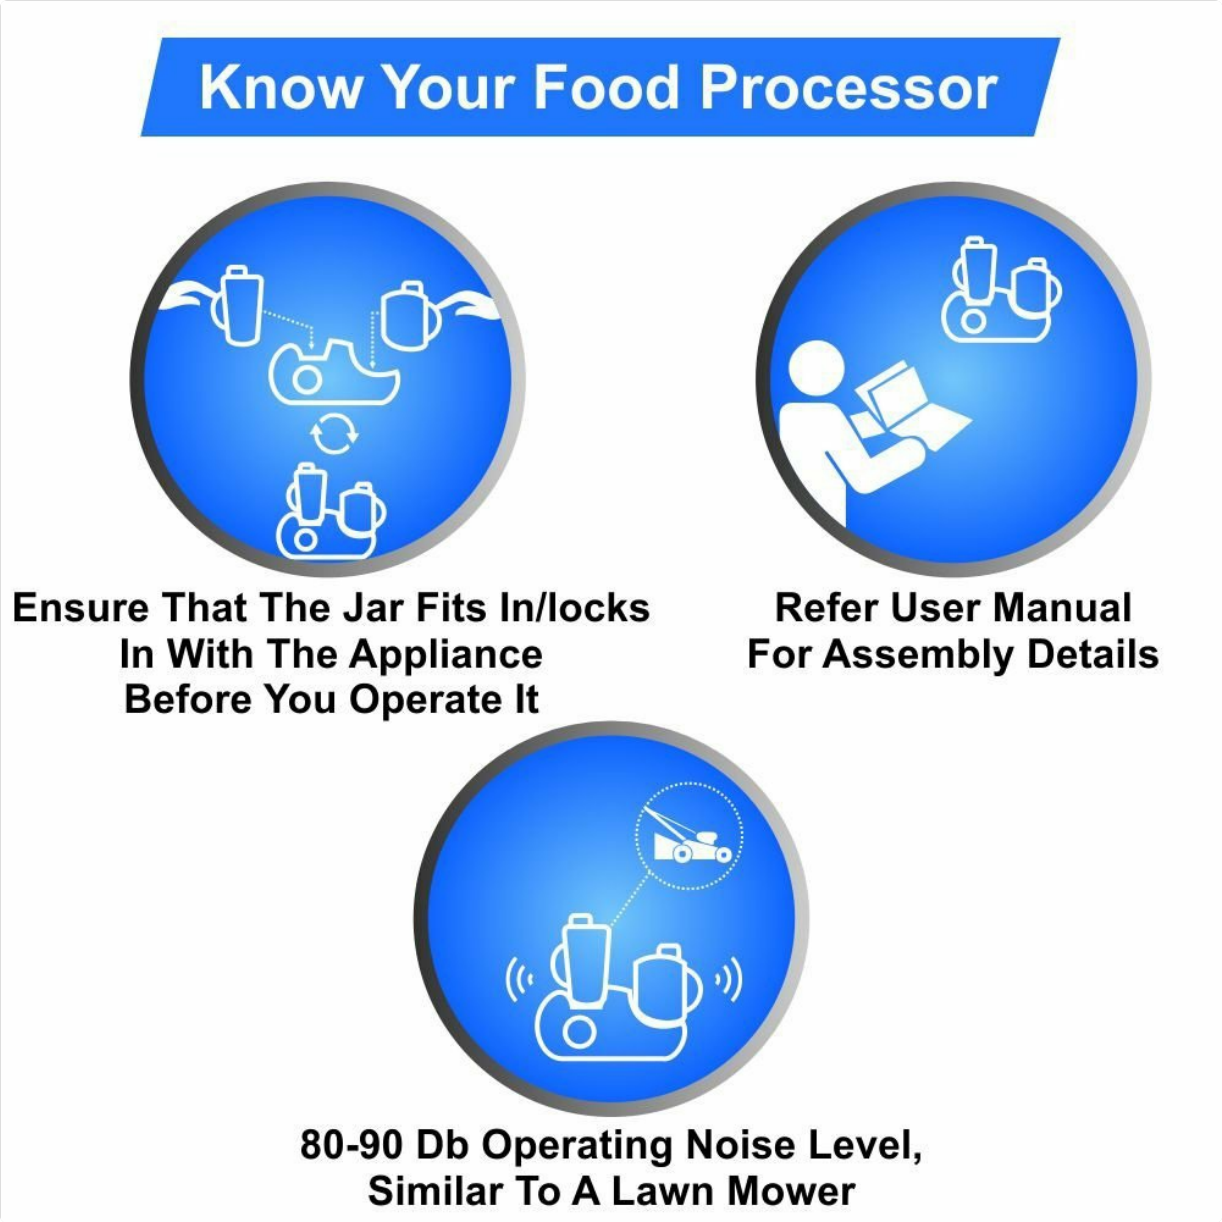


Image: Diagram illustrating the importance of proper jar and lid locking for safe operation.

4. Operating Instructions

Once assembled and plugged in, you can operate the food processor using the speed control dial.

Speed Control and Pulse Function:

- The appliance features 3 speed settings (1, 2, 3) and a 'Pulse' function.
- Turn the dial to the desired speed for continuous operation.
- For short bursts of power or to achieve coarse results, use the 'Pulse' function by turning the dial to 'Pulse' and releasing it.

Specific Functions:

- **Chopping/Slicing/Grating:** Use the processing bowl with the appropriate blade. Ensure ingredients are cut into manageable pieces before adding.
- **Liquidizing:** Use the 1.5L liquidizing jar for blending liquids, making purees, or milkshakes.
- **Grinding:** Use the 1.0L stainless steel grinding jar for dry grinding spices, coffee beans, or making pastes.

- **Juicing:** Attach the centrifugal or citrus juicer as required.
- **Atta Kneading:** Use the dough kneading blade in the processing bowl. Add flour and water in recommended proportions.

Important: Do not operate the food processor continuously for more than 3 minutes. Allow a cooling period between cycles to prevent motor overheating.

Video: An overview of the Bajaj Food Factory FX 11 Food Processor's features and functions. This video demonstrates the various capabilities of the appliance.

5. Maintenance and Cleaning

Proper maintenance ensures the longevity and optimal performance of your food processor.

- **Cleaning the Motor Unit:** Always unplug the appliance before cleaning. Wipe the motor unit with a soft, damp cloth. Do not use abrasive cleaners or immerse in water.
- **Cleaning Jars and Blades:** All removable parts (jars, lids, blades) should be hand washed with warm soapy water immediately after use. Rinse thoroughly and dry.
- **Dishwasher Safety:** The jars and blades are NOT dishwasher safe. Hand wash only.
- **Handling Blades:** Blades are sharp. Handle them with extreme care to avoid injury.
- **Storage:** Store the food processor and its attachments in a clean, dry place, away from direct sunlight and heat.

6. Troubleshooting

If you encounter any issues with your food processor, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Appliance does not start.	Not properly assembled or lid not locked.	Ensure the jar/bowl and lid are correctly aligned and locked into the safety mechanism.
Motor stops during operation.	Overloading or overheating.	Reduce the quantity of ingredients. Unplug and let the motor cool down for 15-20 minutes before restarting.
Unusual noise or vibration.	Improper assembly or unstable surface.	Check that all parts are securely fitted. Place the appliance on a stable, flat surface.
Poor processing results.	Incorrect blade or insufficient liquid.	Ensure the correct blade is used for the task. Add more liquid if processing thick mixtures.

If the problem persists after following these steps, please contact Bajaj customer support.

7. Specifications

Feature	Specification
Brand	Bajaj
Model Name	FX 11
Item Model Number	410524
Wattage	600 Watts
Motor Speed	18000 RPM
Number of Speeds	3 + Pulse
Liquidizing Jar Capacity	1.5 Liters (Polycarbonate)
Grinding Jar Capacity	1.0 Liters (Stainless Steel)
Processing Bowl Capacity	0.3 Liters (Polycarbonate)
Product Dimensions	22D x 23W x 42H Centimeters
Item Weight	7 kg 500 g
Blade Material	Stainless Steel
Special Feature	Safety Lock
Product Care Instructions	Hand Wash
Is Dishwasher Safe	No



Image: Diagram illustrating the dimensions of the food processor.

8. Warranty and Support

Your Bajaj Food Factory FX 11 Food Processor comes with a standard brand warranty. Please refer to the warranty card included in the packaging for specific terms and conditions, including the warranty period and coverage details.

For any service, repairs, or technical assistance, please contact Bajaj customer support. Do not attempt to repair the appliance yourself, as this may void the warranty and pose safety risks.