

ARREGUI T25EB

ARREGUI Class Electronic Lock Safe (Model T25EB) Instruction Manual

Your guide to secure storage and operation.

INTRODUCTION

Thank you for choosing the ARREGUI Class Electronic Lock Safe. This manual provides essential information for the proper installation, operation, and maintenance of your safe. Please read these instructions carefully before use and retain them for future reference.

The ARREGUI Class safe is designed to provide secure storage for your valuables, featuring an electronic lock system and an emergency key override. Its robust alloy steel construction and compact design make it suitable for various home or office environments.

SAFETY INFORMATION

- Always keep the emergency keys in a secure location, separate from the safe, and not inside the safe itself.
- Ensure the safe is securely mounted to a wall or floor to prevent unauthorized removal.
- Do not expose the safe to extreme temperatures or humidity.
- Replace batteries promptly when the low battery indicator appears to ensure continuous operation.
- This safe is designed for security against theft and is not water-resistant.

PACKAGE CONTENTS

Verify that all components are present before proceeding with installation:

- ARREGUI Class Electronic Lock Safe
- Emergency Keys (2 units)
- Mounting Hardware (bolts and anchors)
- AA Alkaline Batteries (4 units)
- Instruction Manual

SETUP

1. Battery Installation

The safe requires 4 AA alkaline batteries for the electronic lock to function. The battery compartment is typically located on the inside of the safe door.

1. Open the safe using the emergency key (refer to "Using the Emergency Key" if needed).
2. Locate the battery compartment cover on the inside of the door.
3. Remove the cover and insert the 4 AA batteries, ensuring correct polarity (+/-).
4. Replace the battery compartment cover.
5. Test the electronic lock by entering the default code (usually 0000 or 1234, check the label inside the safe or manual for specifics) and turning the knob.

2. Initial Code Setting

It is crucial to set your personal code immediately after battery installation.

1. With the safe door open, press the red or green reset button located on the inside of the door, near the hinge or battery compartment. A beep will sound, and the yellow indicator light will illuminate.
2. Within 5 seconds, enter your desired 4 to 8 digit code on the keypad.
3. Confirm the code by pressing the "A" or "#" button (depending on model, refer to keypad markings). A confirmation beep will sound.
4. **Important:** Test the new code with the door open first. Enter your new code, press "A" or "#", and turn the knob. The bolts should retract.

3. Mounting Instructions

For enhanced security, it is highly recommended to mount the safe to a solid surface.



Image: Front view of the ARREGUI Class Electronic Lock Safe in its closed state, showing the keypad and manual override lock.

- The safe features pre-drilled mounting holes in both the base and the back panel.
- Choose a suitable location, such as inside a closet or cabinet, where the safe can be securely fastened to a wall stud or concrete floor.
- Position the safe and mark the drilling points through the pre-drilled holes.
- Drill pilot holes using an appropriate drill bit for your wall or floor material.
- Insert the provided anchors (if applicable) into the drilled holes.
- Align the safe with the holes and secure it using the provided mounting bolts. Tighten firmly.

OPERATING THE SAFE

1. Opening with Electronic Code

1. Enter your 4 to 8 digit personal code on the keypad.
2. Press the "A" or "#" button. The green indicator light will illuminate, and you will hear a beep.
3. Within 5 seconds, turn the knob clockwise to open the safe door.

2. Closing the Safe

Close the door and turn the knob counter-clockwise until the bolts are fully extended and the door is securely locked.

3. Changing the User Code

You can change your personal code at any time while the door is open.

1. Open the safe door.
2. Press the red or green reset button on the inside of the door. The yellow indicator light will illuminate.
3. Enter your new 4 to 8 digit code.
4. Press the "A" or "#" button to confirm.
5. Test the new code with the door open before closing the safe.

4. Using the Emergency Key

The emergency key provides access in case of forgotten code or depleted batteries.



Image: The ARREGUI Class Electronic Lock Safe with its door open, revealing the interior and the emergency keys inserted into the manual override lock.

1. Locate the keyhole cover on the electronic keypad panel.
2. Carefully remove the cover.
3. Insert the emergency key into the keyhole and turn it clockwise.
4. While holding the key turned, turn the main knob clockwise to open the safe.
5. Once open, you can replace the batteries or reset the code. Remember to remove the emergency key and replace the keyhole cover after use.

5. Low Battery Indicator

When the batteries are low, the red indicator light on the keypad will illuminate or flash after entering your code, or the safe may emit a series of warning beeps. Replace all 4 AA batteries immediately to ensure proper function.

MAINTENANCE

- **Battery Replacement:** Replace all 4 AA alkaline batteries annually, or immediately when the low battery indicator activates. Using high-quality alkaline batteries is recommended.
- **Cleaning:** Wipe the exterior of the safe with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these can damage the finish or electronic components.
- **Lock Mechanism:** The electronic lock and bolt mechanism are designed for maintenance-free operation. Do not attempt to lubricate or disassemble these components.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Safe does not open with code.	Incorrect code entered. Batteries are low or dead. Code not confirmed with "A" or "#".	Re-enter code carefully. Replace batteries (see Setup). Ensure "A" or "#" is pressed after code.
Keypad does not respond.	Batteries are completely dead or incorrectly installed.	Use emergency key to open, then replace batteries. Check polarity.
Red light flashes after entering code.	Incorrect code entered. Batteries are low.	Re-enter code. Replace batteries.
Cannot set new code.	Reset button not pressed or not pressed correctly. New code not entered within 5 seconds.	Ensure reset button is pressed until yellow light illuminates. Enter new code and confirm quickly.

SPECIFICATIONS

Feature	Detail
Brand	ARREGUI
Model Number	T25EB
Lock Type	Electronic, Key Override
Material	Alloy Steel
Color	Dark Grey
External Dimensions (W x H x D)	350 mm x 250 mm x 250 mm (approx. 13.8"W x 9.8"H x 9.8"D)
Capacity	17 Liters
Item Weight	6.2 Kilograms (approx. 13.64 pounds)
Bolts	2 x 18 mm bolts
Power Source	4 AA Alkaline Batteries (included)
Mounting Type	Wall/Floor Mount
Special Feature	Fireproof
Water Resistance Level	Not Water Resistant

WARRANTY AND SUPPORT

ARREGUI products are manufactured to high-quality standards. For information regarding warranty coverage, technical support, or service, please refer to the warranty card included with your purchase or visit the official

ARREGUI website. Keep your purchase receipt as proof of purchase for any warranty claims.

For assistance, please contact ARREGUI customer service through their official channels. Do not attempt to repair the safe yourself, as this may void the warranty and compromise its security features.

© 2025 ARREGUI. All rights reserved.

Related Documents - T25EB

CLASS ES/ Electrónico + panel IT/ Electrónico + pannello PT/ Electrónico + painel DE/ Elektronisch + Schloß FR/ Électronique + cadenas EL/ Ηλεκτρονική + πινάκας GR/ Ελεκτρονικη + Τασμα ARREGUI	ARREGUI Class Electronic Safe: User Manual and Warranty Information Comprehensive user manual and warranty details for the ARREGUI Class electronic safe, covering operation, installation, maintenance, and security features. Available in multiple languages including English, Spanish, Italian, Portuguese, French, Greek, and German.
CLASS ES/ Electrónico + panel IT/ Electrónico + pannello PT/ Electrónico + painel DE/ Elektronisch + Schloß FR/ Électronique + cadenas EL/ Ηλεκτρονική + πινάκας GR/ Ελεκτρονικη + Τασμα ARREGUI	ARREGUI Class Electronic Safe: User Manual and Security Guide Comprehensive user manual for the ARREGUI Class electronic safe, covering operation, installation, battery replacement, programming codes, manual override, and warranty information.
PRINT ES/ Seguro fuerte digital con huella dactilar IT/ Casaforte ad impronta digitale PT/ Caixa digital com impressão digital DE/ Digital safe with fingerprint sensor FR/ Coffre fort numérique avec empreinte digitale ARREGUI	Arregui PRINT Digital Safe with Fingerprint Access - User Manual and Instructions Comprehensive user manual for the Arregui PRINT digital safe. Learn how to install, program codes, register fingerprints, open, close, and maintain your fingerprint access safe.
SUMA ES/ Seguro fuerte electrónico IT/ Seguro elettronico PT/ Seguro electrónico DE/ Elektronischer Tresor FR/ Caixa eletrónica EL/ Ηλεκτρονικός θησαυρός GR/ Ελεκτρονικη θησαυροφυλακι ARREGUI	Arregui SUMA Electronic Safe: User Manual and Warranty Information Detailed instructions for operating and maintaining the Arregui SUMA electronic safe, including setup, security features, battery management, and warranty information. Features multilingual support with English as the primary language.



[\[pdf\]](#) Catalog Price List

General Catalogue 2024 2025 Safes and Security arregui.es biz 4 index security kamo invisible safety lock pag 62 63 digital door viewer 64 alarm with remote ARREGUI GENERAL CATALOGUE SAFES AND SECURITY 06 |||

General Catalogue 2024-2025 Safes and Security arregui.biz FE NTE y ac er General information PI ... Includes fixing screws Fixing holes: Ref. T20EB: 2 at the base and 2 en la trasera de 7 mm . Ref. **T25EB**: 4 at the base and 4 en la trasera de 7 mm . TYPE OF LOCK Electronic knob Emergency key O...

lang:es score:22 filesize: 5.38 M page_count: 94 document date: 2024-06-14



[\[pdf\]](#) Catalog

Catálogo General ARREGUI CAJAS FUERTES SEGURIDAD 2024 2025arregui.es catalogos 2025 ||| Catlogo General 2024-2025 Cajas fuertes y Seguridad arregui.es FE NTE y ac er Informacin general ... illos de fijacin Agujeros de fijacin: Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm . SISTEMA DE CIERRE Electrónica pomo Llave de emerg...

lang:es score:22 filesize: 5.29 M page_count: 94 document date: 2024-07-18



[\[pdf\]](#) Catalog

Catálogos Arregui Elige y Descarga Orio Gipuzkoa CATALOGO GENERAL CAJAS FUERTES SEGURIDAD 2022 arregui.es 01 |||

Catlogo General 2022 Cajas fuertes y Seguridad arregui.es Informacin general PICTOGRAMAS CAJAS FUE ... illos de fijacin Agujeros de fijacin: Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm . SISTEMA DE CIERRE Electrónica pomo Llave de emerg...

lang:es score:21 filesize: 10.84 M page_count: 101 document date: 2022-01-04



[\[pdf\]](#) Catalog

Cajas fuertes y Seguridad 20 mai 2024 — SEGURIDAD FRENTE AL ROBO La caja fuerte AWA utiliza la red Wifi para enviar alertas ante posibles ataques externos robo apertura mediante coacción Catalogo

General ARREGUI CAJAS FUERTES 2025 arregui.es 05 |||

Catlogo General 2024-2025 Cajas fuertes y Seguridad arregui.es FE NTE y ac er Informacin general ... illos de fijacin Agujeros de fijacin: Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm .

SISTEMA DE CIERRE Electronica como Llave de emerg...

lang:es score:21 filesize: 5.4 M page_count: 94 document date: 2024-05-02



[\[pdf\]](#) Catalog

Cajas fuertes y Seguridad 8 avr 2024 — SEGURIDAD FRENTE AL ROBO La caja fuerte AWA utiliza la red Wifi para enviar alertas ante posibles ataques externos robo apertura mediante coacción Catalogo

General ARREGUI CAJAS FUERTES 2025 2 arregui.es 04 |||

Catlogo General 2024-2025 Cajas fuertes y Seguridad arregui.es FE NTE y ac er Informacin general ... illos de fijacin Agujeros de fijacin: Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm .

SISTEMA DE CIERRE Electronica como Llave de emerg...

lang:es score:21 filesize: 5.36 M page_count: 94 document date: 2024-04-05



[\[pdf\]](#)


Caja Fuerte Sobreponer Class Electronica Cajas fuertes de sobreponer ArreguiFicha caja fuerte Arregui CLASS ELECTRONICAarregui.es index controller attachment id 108 |||

eme ESP NTE y CLASS ELECTRNICA / rgenc 2 CARACTERSTICAS FSICAS

Espesor puerta/cuerpo: 3 mm/1,5 mm Incluye tornillos de fijacin Agujeros de fijacin:

Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm . SISTEMA DE CIERRE Electronica como ...

lang:es score:20 filesize: 89.37 K page_count: 1 document date: 2025-01-03

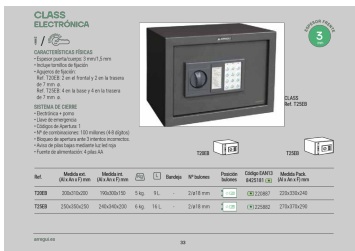

[\[pdf\]](#)

Ficha técnica Caja fuerte electrónica ARREGUI Class 35x25xh 25 cm Ferreterías cerca de ti Cadena88 202202281514034170590 cadena88 sites default files content products 1832d82 |||

NTE y eme ESP CLASS ELECTRNICA / rgenc 2 CARACTERSTICAS FSICAS

Espesor puerta/cuerpo: 3 mm/1,5 mm Incluye tornillos de fijacin Agujeros de fijacin:

Ref. T20EB: 2 en el frontal y 2 en la trasera de 7 mm . Ref. **T25EB**: 4 en la base y 4 en la trasera de 7 mm . SISTEMA DE CIERRE Electronica como ...

lang:es score:19 filesize: 114.52 K page_count: 1 document date: 2022-02-28

TARIFA ARREGUI JULIO 2022					UNIDAD	PRECIO
REFERENCIA	DESCRIPCION	UNIDAD	PRECIO	PRECIO	PRECIO	PRECIO
210740T	ARREGUI 210740T	CAJA	18	18	18	18
220740	ARREGUI 220740	CAJA	18	18	18	18
220750	ARREGUI 220750	CAJA	18	18	18	18
44240	ARREGUI 44240	CAJA	18	18	18	18
44250	ARREGUI 44250	CAJA	18	18	18	18
44270	ARREGUI 44270	CAJA	18	18	18	18
400140	ARREGUI 400140	CAJA	18	18	18	18
400050	ARREGUI 400050	CAJA	18	18	18	18
410070	ARREGUI 410070	CAJA	18	18	18	18
180120	ARREGUI 180120	CAJA	18	18	18	18
180040	ARREGUI 180040	CAJA	18	18	18	18
180050	ARREGUI 180050	CAJA	18	18	18	18
180070	ARREGUI 180070	CAJA	18	18	18	18
0080	ARREGUI 0080	CAJA	18	18	18	18
240220	ARREGUI 240220	CAJA	18	18	18	18
240040	ARREGUI 240040	CAJA	18	18	18	18
240020	ARREGUI 240020	CAJA	18	18	18	18
240090	ARREGUI 240090	CAJA	18	18	18	18
19010-S1	ARREGUI 19010-S1	CAJA	18	18	18	18
19010-S2	ARREGUI 19010-S2	CAJA	18	18	18	18
16501-S0	ARREGUI 16501-S0	CAJA	18	18	18	18
16501-S1	ARREGUI 16501-S1	CAJA	18	18	18	18
16501-S2	ARREGUI 16501-S2	CAJA	18	18	18	18
T17K	ARREGUI T17K	CAJA	18	18	18	18
T25K	ARREGUI T25K	CAJA	18	18	18	18
T20EB	ARREGUI T20EB	CAJA	18	18	18	18
T25EB	ARREGUI T25EB	CAJA	18	18	18	18
221740	ARREGUI 221740	CAJA	18	18	18	18
TARIFA ARREGUI JULIO 2022	TARIFA ARREGUI JULIO 2022	CAJA	18	18	18	18
EAN DESCRIPCION	EAN DESCRIPCION	CAJA	18	18	18	18
8425181738108	8425181738108	CAJA	18	18	18	18
CAJA	CAJA	CAJA	18	18	18	18
FTE SOB.	FTE SOB.	CAJA	18	18	18	18
AWA EXCLUSIVE...	AWA EXCLUSIVE...	CAJA	18	18	18	18

[pdf]

arregui tarifa general 18 julio 2022 xlsx mundobuzon media wysiwyg docs tarifas de precios |||

REFERENCIA 210740T 220740 220750 44240 44250 44270 400140 400050 410070

180120 180040 180050 180070 ... 0080 240220 240040-IG 240020-SL 240090

19010-S1 19010-S2 16501-S0 16501-S1 16501-S2 T17K T25K T20EB **T25EB**

221740 TARIFA ARREGUI JULIO 2022 EAN DESCRIPCION 8425181738108 CAJA

FTE SOB. AWA EXCLUSIVE...

lang:i-klnglon score:15 filesize: 69.67 K page_count: 11 document date: 0000-00-00