

[Manuals.plus](#) /

› [ION](#) /

› ION Audio Max LP - User Manual

ION Max LP

ION Audio Max LP Vinyl Record Player User Manual

Model: Max LP

INTRODUCTION

The ION Audio Max LP is an all-in-one turntable designed for enjoying your vinyl record collection and converting it to digital music files. It features built-in stereo speakers, multiple playback speeds, and versatile connectivity options including USB, RCA outputs, and an auxiliary input.



Image: The ION Audio Max LP turntable in natural wood finish with a record spinning on its platter, covered by a clear dust cover.

SAFETY INFORMATION

- Read and keep these instructions.
- Heed all warnings.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.

- Unplug this apparatus during lightning storms or when unused for long periods of time.

PACKAGE CONTENTS

- Max LP Turntable
- 45 RPM Adapter
- Dust Cover
- Felt Slipmat
- Power Adapter
- Safety & Warranty Manual
- Software CD (EZ Vinyl/Tape Converter)
- USB Cable
- Quick Start Guide

SETUP

1. **Unpacking:** Carefully remove all contents from the box. Ensure all listed items are present.
2. **Placement:** Place the Max LP on a flat, stable surface away from direct sunlight, heat sources, or excessive dust.
3. **Dust Cover:** Attach the clear dust cover to the hinges at the back of the turntable. This protects the platter and stylus when not in use.
4. **Power Connection:** Connect the included power adapter to the DC 12V 1A input on the rear panel of the Max LP, then plug the adapter into a power outlet.
5. **Audio Output (Optional):**

LUXURIOUS WOOD FINISH



AUX

1/8-INCH AUX INPUT
TO CONVERT OR PLAYBACK
FROM OTHER MEDIA SOURCES



**1/8-INCH
HEADPHONE OUTPUT**
FOR PRIVATE LISTENING



RCA OUTPUTS
FOR CONNECTION TO EXTERNAL
SPEAKERS AND HIFI SEPARATES

Image: Close-up of the ION Audio Max LP showing the 1/8-inch auxiliary input, 1/8-inch headphone output, and standard RCA outputs for connecting to external audio systems.

- **RCA Outputs:** For connecting to an external stereo system or powered speakers, use standard RCA cables (not included) to connect the AUDIO OUTPUT jacks on the rear of the Max LP to the audio input of your receiver or speakers.
- **Auxiliary Input:** To play audio from an external source (e.g., cassette player, CD player) through the Max LP's built-in speakers, connect the source to the AUX INPUT (1/8-inch) jack on the rear panel.

6. USB Connection (for Digital Conversion):

CONNECT, CONVERT



HIGH SPEED USB CONNECTIVITY


Convert your treasured record collection to digital files using the included EZ Vinyl Converter Software

Image: The ION Audio Max LP turntable connected to a laptop via a USB cable, illustrating its high-speed USB connectivity for converting records to digital files.

Connect the included USB cable from the USB port on the rear of the Max LP to an available USB port on your computer. Install the EZ Vinyl/Tape Converter software from the included CD or download it from the ION Audio website.

OPERATING INSTRUCTIONS

1. **Powering On/Off:** Locate the POWER switch on the rear panel and slide it to the ON position to power on the unit. Slide to OFF when not in use.
2. **Placing a Record:** Place a vinyl record on the turntable platter. If playing a 45 RPM single, place the included 45 RPM adapter on the center spindle.
3. **Selecting Playback Speed:**

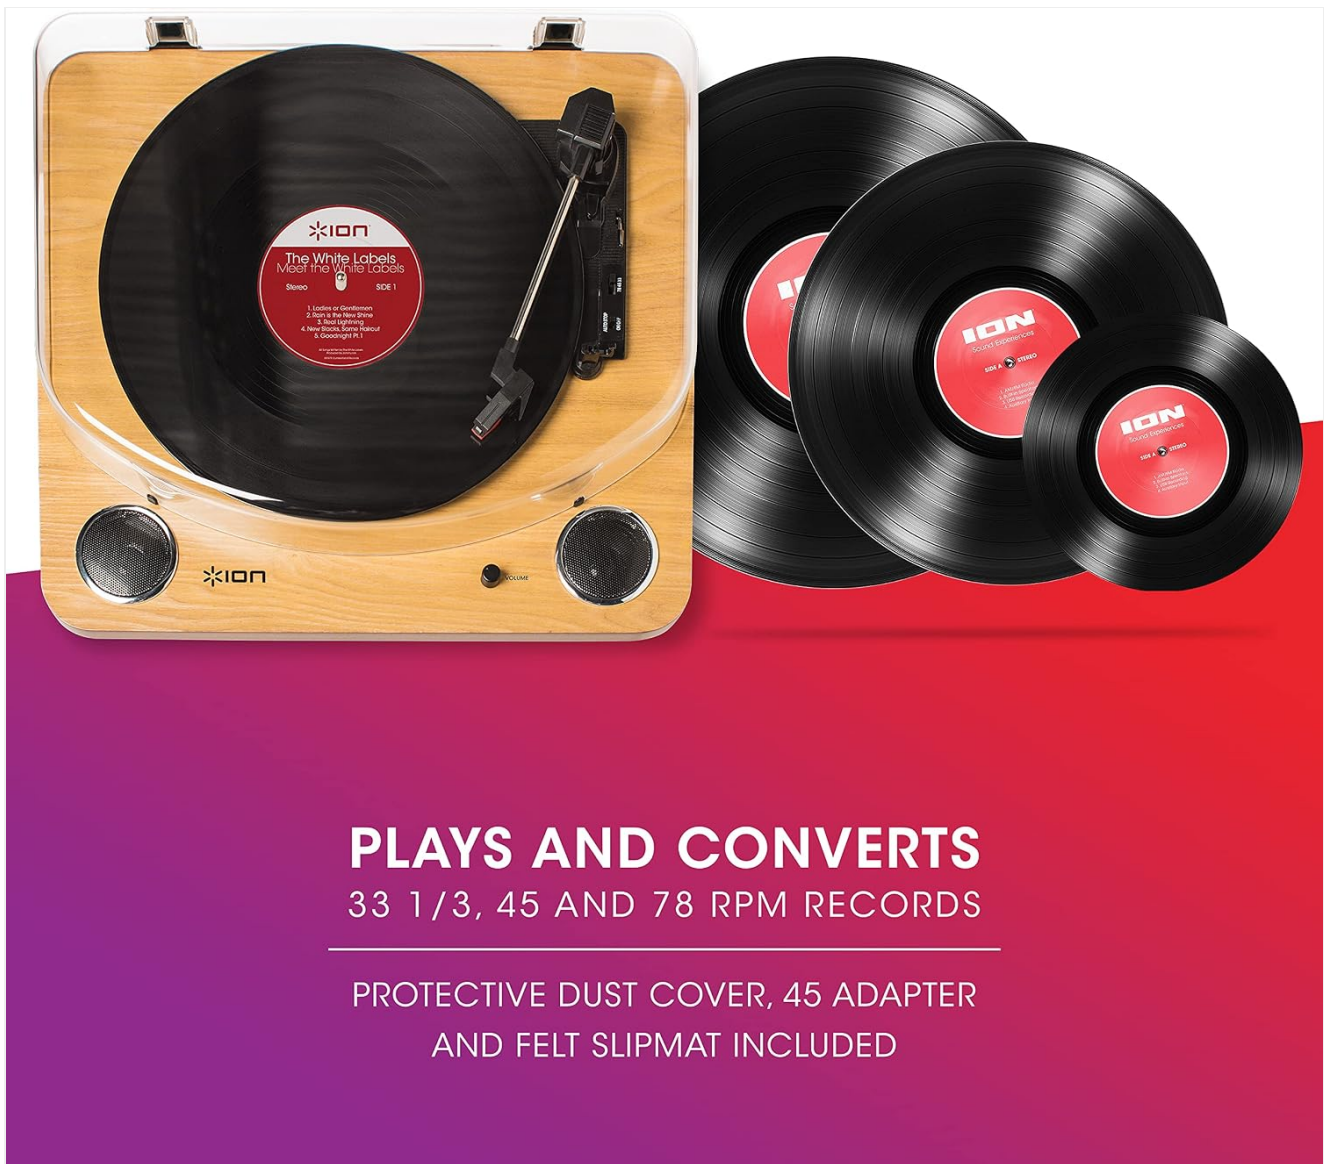

PLAYS AND CONVERTS

33 1/3, 45 AND 78 RPM RECORDS

PROTECTIVE DUST COVER, 45 ADAPTER
AND FELT SLIPMAT INCLUDED

Image: The ION Audio Max LP turntable with various record sizes (33 1/3, 45, 78 RPM) displayed, indicating its capability to play and convert different record types.

Use the 33/45/78 RPM selector switch (located near the tonearm) to choose the appropriate speed for your record.

4. Playing a Record:



Image: A close-up view of the Max LP's ultra-robust diamond-tipped ceramic cartridge, emphasizing its durability and high output signal.

- Gently lift the tonearm using the cue lever.
- Move the tonearm over the desired track on the record.
- Slowly lower the tonearm onto the record using the cue lever. The record will begin to play.
- When the record finishes, the turntable will automatically stop spinning (if Auto-Stop is enabled). Manually return the tonearm to its rest.

5. **Volume Control:** Adjust the VOLUME knob on the front panel to control the sound level from the built-in speakers.



ROOM FILLING SOUND

BUILT IN STEREO SPEAKERS
DELIVER PUNCHY, CRYSTAL CLEAR SOUND

Image: The ION Audio Max LP turntable with visual sound waves indicating the room-filling sound delivered by its built-in stereo speakers.

6. **USB Conversion:** Follow the instructions provided with the EZ Vinyl/Tape Converter software to digitize your vinyl records. The software guides you through the process of recording and separating tracks.
7. **Headphone Output:** For private listening, plug 1/8-inch (3.5mm) headphones into the headphone jack on the front panel.

MAINTENANCE

- **Cleaning the Unit:** Use a soft, dry cloth to clean the exterior of the Max LP. For the dust cover, use a soft, lint-free cloth. Do not use abrasive cleaners or solvents.
- **Cleaning the Stylus:** Gently brush the stylus from back to front with a soft brush designed for stylus cleaning. Do not use excessive force.
- **Stylus Replacement:** The stylus (needle) has a limited lifespan. If sound quality degrades, the stylus may need replacement. Refer to the ION Audio website or contact support for compatible replacement styli.
- **General Care:** Avoid exposing the unit to extreme temperatures, humidity, or direct sunlight. Always place the dust cover when not in use to prevent dust accumulation.

TROUBLESHOOTING

Problem	Solution
No power	Ensure the power adapter is securely connected to the unit and a working power outlet. Check the power switch is in the ON position.
No sound from built-in speakers	Increase the VOLUME knob. Ensure the tonearm is properly lowered onto the record.
No sound from external speakers	Verify RCA cables are correctly connected to both the Max LP and your external audio system. Ensure your external system is set to the correct input.
Record skips or sound is distorted	Clean the record. Clean the stylus. Ensure the turntable is on a stable, level surface. Check if the stylus is worn and needs replacement.
Record plays too fast/slow	Adjust the 33/45/78 RPM selector switch to the correct speed for the record.
USB conversion not working	Ensure the USB cable is securely connected to both the Max LP and your computer. Verify the EZ Vinyl/Tape Converter software is installed and running correctly. Check your computer's audio input settings.

SPECIFICATIONS

Feature	Detail
Model Name	Max LP
Color	Natural Wood
Style	Max LP Wood with Speakers
Item Weight	7.71 Pounds
Product Dimensions	15.23 x 16.45 x 4.05 inches
Material	Wood
Playback Speeds	33 1/3, 45, 78 RPM
Speakers	Built-in Stereo Speakers (2.4 Watts Output)
Connectivity	USB, RCA Audio Output, 1/8-inch Aux Input
Power Source	Corded Electric (12V)

OFFICIAL PRODUCT VIDEO

Your browser does not support the video tag.

Video: An official product overview of the ION Audio Max LP Vinyl Record Player, showcasing its features and design.

WARRANTY AND SUPPORT

For warranty information, technical support, or replacement parts, please visit the official ION Audio website or contact their customer service. Keep your purchase receipt for warranty claims.

Additional resources, including a detailed User Guide (PDF), may be available on the product's Amazon page or the manufacturer's website.

User Guide (PDF): <https://manuals.plus/m/914d83c8358ee13db485a12820bd33601504559ca9e7aa01e6a6fed34ac6cc1d>

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question