

Edifier M1370BT

Edifier M1370BT 2.1 Bluetooth Speaker User Manual

Model: M1370BT

INTRODUCTION

Thank you for purchasing the Edifier M1370BT 2.1 Bluetooth Speaker system. This manual provides important information regarding the setup, operation, and maintenance of your speaker system. Please read it thoroughly before use to ensure optimal performance and safety.

The Edifier M1370BT is a versatile 2.1 multimedia speaker system designed for enhanced audio experience. It features both Bluetooth and auxiliary input options, allowing seamless connectivity with various devices such as smartphones, tablets, and televisions. The system includes a powerful subwoofer for deep bass and two satellite speakers for clear mid-range and treble frequencies.

PACKAGE CONTENTS

Please ensure all items are present in the package:

- Subwoofer unit
- Satellite speakers (2 units)
- Audio input cable (3.5mm to 3.5mm)
- User Manual



Image: The complete Edifier M1370BT 2.1 speaker system, showing the central subwoofer unit and the two satellite speakers positioned on either side.

PRODUCT OVERVIEW

The Edifier M1370BT system consists of a subwoofer and two satellite speakers. Key features include:

- **Bluetooth Connectivity:** Easily pair with Bluetooth-enabled devices for wireless audio streaming.
- **Auxiliary Input:** Standard 3.5mm and stereo RCA line-in options for wired connections.
- **Upward-Angled Satellites:** Designed to project sound directly towards the listener for an optimized audio experience.
- **Integrated Controls:** Master volume and bass adjustment dials conveniently located on the subwoofer.
- **Magnetically Shielded Subwoofer:** Features a 5-inch (131mm) bass unit for rich, deep audio.



Image: A single satellite speaker from the Edifier M1370BT system, highlighting its unique upward-angled design and translucent stand.



Image: The rear panel of the Edifier M1370BT subwoofer, displaying the power switch, audio input ports (3.5mm and RCA), and volume/bass control knobs.

SETUP GUIDE

1. Placement:

Position the subwoofer on a flat, stable surface, preferably on the floor for optimal bass response. Place the satellite speakers on either side of your listening area, ensuring they are facing towards you. The translucent stands are designed to reduce interference from surfaces.

2. Connect Satellite Speakers:

Connect the cables from the satellite speakers to the corresponding output ports on the rear panel of the subwoofer. Ensure a secure connection for both left and right channels.

3. Connect Audio Source:

You have two primary options for connecting an audio source:

- **Bluetooth:** Turn on the speaker system. The system will automatically enter Bluetooth pairing mode or you can switch to Bluetooth mode. On your device (smartphone, tablet, etc.), enable Bluetooth and select "Edifier M1370BT" from the list of available devices to pair.
- **Auxiliary (3.5mm or RCA):** Use the provided 3.5mm audio cable to connect your audio source (e.g., computer, TV, MP3 player) to the 3.5mm line-in jack on the side of the subwoofer. Alternatively, use an RCA cable (not included) for stereo line-in.

4. Power Connection:

Connect the power cable from the subwoofer to a standard AC power outlet (220 Volts). Turn on the power switch

located on the rear panel of the subwoofer.

5. **Initial Volume Adjustment:**

Before playing audio, set the master volume control on the subwoofer to a low level to avoid sudden loud sounds. Adjust the bass control to your preference.

OPERATING INSTRUCTIONS

Power On/Off

To power on the system, flip the power switch on the rear panel of the subwoofer to the 'ON' position. To power off, flip the switch to the 'OFF' position.

Volume Control

The master volume control dial is located on the side panel of the subwoofer. Rotate clockwise to increase volume and counter-clockwise to decrease volume.

Bass Adjustment

The bass adjustment dial is also located on the side panel of the subwoofer, next to the master volume control. Rotate this dial to increase or decrease the bass output to suit your listening preference.

Input Mode Selection

The system automatically prioritizes Bluetooth connection. If a Bluetooth device is paired and connected, the system will play audio from that source. If no Bluetooth device is connected or paired, the system will default to the auxiliary input. To switch between inputs, ensure the desired source is active and connected.

- **Bluetooth Mode:** Ensure Bluetooth is enabled on your device and paired with "Edifier M1370BT".
- **Auxiliary Mode:** Connect your audio source via the 3.5mm or RCA input. If a Bluetooth device is connected, disconnect it to switch to auxiliary input.

MAINTENANCE AND CARE

- **Cleaning:**
Wipe the speaker surfaces with a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as they may damage the finish. Avoid spraying liquids directly onto the speakers.
- **Placement:**
Keep the speakers away from direct sunlight, heat sources, and excessive moisture. Ensure adequate ventilation around the subwoofer to prevent overheating.
- **Handling:**
Handle the speakers with care. Avoid dropping or subjecting them to strong impacts, which can damage internal components.
- **Power Off When Not In Use:**
For extended periods of non-use, it is recommended to power off the speaker system and unplug it from the power outlet.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No sound	Power cable not connected. Power switch is off. Volume is too low. Incorrect input source selected. Audio cable not connected properly. Bluetooth device not paired or connected.	Ensure power cable is securely plugged in. Turn the power switch to 'ON'. Increase the master volume on the subwoofer and your audio source. Verify the correct input mode (Bluetooth/Aux) is active. Check all audio cable connections. Re-pair or reconnect your Bluetooth device.
Distorted sound	Volume too high. Audio source output is distorted. Poor cable connection.	Reduce the volume on both the speaker system and the audio source. Test with a different audio source. Ensure all cables are securely connected.
Bluetooth connection issues	Device too far from speakers. Interference from other devices. Speaker not in pairing mode.	Move your Bluetooth device closer to the speakers. Turn off other Bluetooth devices nearby. Ensure the speaker is discoverable or re-enter pairing mode.

If the problem persists after trying these solutions, please contact Edifier customer support.

SPECIFICATIONS

Model Name	M1370BT
Speaker Type	2.1 Multimedia Speaker System (Subwoofer, Satellite)
Connectivity Technology	Bluetooth, Auxiliary (3.5mm, RCA)
Power Output	Total 27 Watts (RMS)
Subwoofer Driver	5-inch (131mm) magnetically shielded
Input Sensitivity	450 mV ± 50mV
Signal-to-Noise Ratio	≥ 85 dB
Impedance	4 Ohm
Power Source	AC (220 Volts)
Dimensions (L x W x H)	35.6 x 25.7 x 29.1 cm
Item Weight	3.2 kg (7.05 Pounds)
Color	Black

WARRANTY INFORMATION

The Edifier M1370BT 2.1 Bluetooth Speaker system comes with a**1-Year Limited Warranty** from the date of purchase. This warranty covers manufacturing defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accident, unauthorized modification, or external causes. Please retain your proof of purchase for warranty claims. For detailed warranty terms and conditions, refer to the warranty card included with your product or visit the official Edifier website.

CUSTOMER SUPPORT


For technical assistance, troubleshooting beyond this manual, or warranty inquiries, please contact Edifier customer support.
Edifier Official Website: www.edifier.com
(Please visit the website for regional contact information and support channels.)

© 2024 Edifier International. All rights reserved.

Documents - Edifier – M1370BT



[\[pdf\]](#) Datasheet Accessories
M1370 Connect M1370BT 2313501 farnell datasheets |||
Edifier Multimedia M1370 Connect - **M1370BT** CONNECT PRODUCT DESCRIPTION
The M1370 by Edifier is a fashionable 2.1 speaker system that transforms traditional multimedia speaker systems into a trendy accessory. Equipped with Bluetooth, this 2.1 system is transformed into a versatile speaker system that...
lang:en score:30 filesize: 143.66 K page_count: 1 document date: 2015-04-20

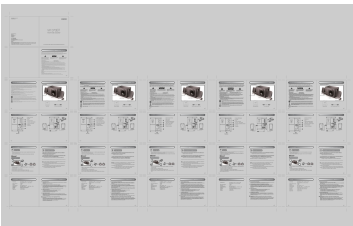

[\[pdf\]](#) User Manual Instructions
M1370BT IB 200 M1370B 02 en fr sp ge it EDIFIER ai tech36 1 Read these instructions 2 Keep 3 Heed all warnings 4 Follow 5 Do not use Please read this manual carefully to obtain the best of system
WARNING To reduce risk fire or electric shock do expose apparatus rain re moisture Thank you for purchasing product For generations tries provide powered The lightning ash with arrowhead inside thetriangle is intended alert user presence un insulated fire FCC statement This device complies Part 15 Rules Operation subject following two conditions mini home theater great sound performance Correct Disposal marking indicates that should be disposed other household wastes throughout EU User Manual SkTNJoWkP cdn ventmere edifier dev 2020 07 online int
WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. Thank you for purchasing this EDIFIER product. For generations, EDIFIER tries to provide powered speaker products to satisfy the need of our end customers, even the most demanding ones. This prod...
lang:en score:23 filesize: 8.33 M page_count: 1 document date: 2014-04-23




[\[pdf\]](#) User Manual

Manual M1370BT Edifier 34 W ▷ Колонки 2 1 Дерево Пластик купить в GEEK MD geek md index route product lang ru id 797 |||

...

lang:en **score:19** filesize: 3.73 M page_count: 16 document date: 2022-05-30

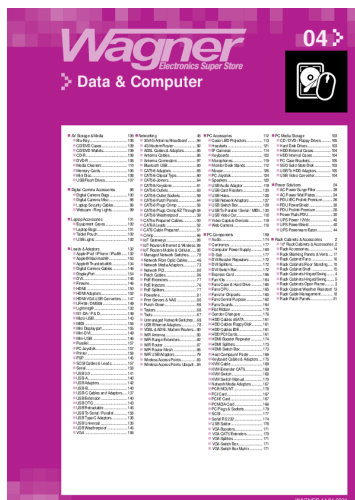

[\[pdf\]](#) User Manual Instructions Accessories Catalog

Data Computer Wagner Electronics allow extra time for road transport delivery Instructions included Manual power off switch port AC750 Wi Fi Range Extender Wall 14 apr 2021 — AV Storage Media 106 Networking46 PC Accessories 112 103 Blu Ray108 3G 4G Antenna Broadband 94 Casio LED Projectors 113 CD 04 wagneronline au mp wagner catalogue |||

04 Data Computer AV Storage Media 106 Networking46 PC Accessories 112 PC Media Storage 103 ... 12mm Mains powered. Code SPK1024 2.1 SPEAKER SYSTEM BLUETOOTH - EDIFIER STEREO WIRED OR BLUETOOTH - **M1370BT** Input type: Bluetooth or 3.5mm auxiliary Power Output: RMS 8W x 2 18W Signal to noise rati...

lang:en **score:15** filesize: 15.59 M page_count: 180 document date: 0000-00-00