

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SoyaJoy](#) /

› [SoyaPower G4 Automatic Soymilk Maker User Manual](#)

SoyaJoy SoyaPower G4

SoyaPower G4 Automatic Soymilk Maker User Manual

Model: SoyaPower G4

Brand: SoyaJoy

INTRODUCTION

Thank you for choosing the SoyaPower G4 Automatic Soymilk Maker. This appliance is designed to simplify the process of making fresh soy milk, almond milk, rice milk, and even soups and porridges at home. Featuring an all-stainless steel grinding and cooking chamber, advanced temperature and water level sensors, and eight pre-programmed functions, the SoyaPower G4 offers versatility and ease of use for healthy beverage and food preparation.



Image: Front view of the SoyaPower G4 Soy Milk Maker, showcasing its white body with red accents and floral design.

IMPORTANT SAFETY PRECAUTIONS

To ensure safe operation and prevent damage to the appliance, please read and follow all instructions carefully.

- Always ensure the unit is properly assembled before operation.
- Do not immerse the motor head (top part with blades and controls) in water or any other liquid. This part contains electrical components.

- Ensure the power cord is securely connected to a grounded outlet. This appliance is designed for US power supply only.
- Keep hands and utensils away from the grinding blades during operation.
- Allow the unit to cool down before cleaning or storing.
- Do not operate the appliance if the cord or plug is damaged, or if the appliance malfunctions or has been dropped.
- Keep out of reach of children.
- Use only the accessories provided or recommended by the manufacturer.
- Do not overfill the pitcher beyond the maximum fill line.

COMPONENTS AND PARTS

Familiarize yourself with the main components of your SoyaPower G4:

- **Motor Head (Top Unit):** Contains the motor, grinding blades, heating element, and control panel.
- **Pitcher (Stainless Steel Container):** The main cooking and grinding chamber.
- **Power Cord:** Detachable cord for connecting to power.
- **Measuring Cup:** For precise ingredient measurement.
- **Strainer:** For separating pulp from finished milk.
- **Cleaning Pad/Brush:** For easier cleaning.



Image: All components of the SoyaPower G4 Soy Milk Maker laid out, including the main unit, power cord, measuring cup, strainer, and cleaning brush.



Image: Top-down view of the stainless steel pitcher, showing its clean interior and the two small protrusions at the bottom for the heating element.



Image: Close-up view of the three-pronged stainless steel grinding blade located on the underside of the motor head.

SETUP

1. **Unpack:** Carefully remove all components from the packaging.
2. **Initial Cleaning:** Before first use, wash the stainless steel pitcher and the grinding blade thoroughly with warm, soapy water. Wipe the exterior of the motor head with a damp cloth. Do not immerse the motor head.
3. **Assemble:** Place the pitcher on a stable, flat surface. Align the motor head with the pitcher and gently lower it until it sits securely. Ensure the electrical contacts on the handle and the side of the pitcher align properly.
4. **Connect Power:** Insert the power cord into the appliance's receptacle and then into a grounded electrical outlet.

OPERATING INSTRUCTIONS

The SoyaPower G4 features an intuitive control panel with a "Select" button to cycle through functions and a "Start/Cancel" button to begin or stop a cycle.



Image: Close-up of the SoyaPower G4 control panel, showing the "Select" and "Start/Cancel" buttons, and the eight function indicators: Grains, Soaked Beans, Dry Beans, Porridge, Soup, Raw/Juice, Mung Bean, and Hot Chocolate.



Image: Interior view of the stainless steel pitcher, clearly showing the 1000ml and 1200ml maximum fill lines etched into the side.



Image: Close-up of the water level sensor located on the side of the motor head, which ensures proper liquid levels during operation.

General Operation Steps:

1. Add desired ingredients (beans, grains, nuts, water) to the stainless steel pitcher. Ensure the water level is between the MIN and MAX fill lines (1000ml and 1200ml).
2. Place the motor head securely onto the pitcher.
3. Plug in the power cord. The unit will beep, and all indicator lights will flash briefly.
4. Press the "Select" button repeatedly to cycle through the available functions until the desired program's indicator light is illuminated.
5. Press the "Start/Cancel" button to begin the selected program. The indicator light will blink during operation.
6. Once the program is complete, the unit will beep several times, and the indicator light will stop blinking and remain solid.
7. Unplug the unit and carefully remove the motor head. Pour the contents through the provided strainer if desired to separate pulp.

Specific Program Usage:

- **Soaked Beans:** Ideal for making traditional soy milk from pre-soaked soybeans.
- **Dry Beans:** For making soy milk or other bean milks from un-soaked beans.

- **Grains:** Suitable for rice milk, oat milk, or other grain-based beverages.
- **Raw/Juice:** For making raw nut milks (e.g., almond milk, cashew milk) or fruit/vegetable juices that do not require cooking.
- **Porridge:** For preparing hot porridges from grains.
- **Soup:** For making various hot soups.
- **Mung Bean:** Specifically optimized for mung bean preparations.
- **Hot Chocolate:** For preparing hot chocolate beverages.

CLEANING AND MAINTENANCE

Proper cleaning ensures the longevity and hygiene of your SoyaPower G4.

1. **Immediate Cleaning:** Clean the unit immediately after each use to prevent food residue from drying and sticking.
2. **Unplug:** Always unplug the appliance from the power outlet before cleaning.
3. **Motor Head:**
 - Do NOT immerse the motor head in water.
 - Rinse the grinding blade and the underside of the motor head under running water. Use the provided cleaning brush to remove any stuck-on particles.
 - Wipe the exterior of the motor head with a damp cloth.
 - Ensure the electrical contacts are dry before storage or next use.
4. **Pitcher:**
 - Wash the stainless steel pitcher with warm, soapy water. A non-abrasive sponge or cloth is recommended.
 - Rinse thoroughly and dry completely.
5. **Accessories:** Wash the measuring cup and strainer with warm, soapy water and dry.
6. **Storage:** Store the clean and dry appliance in a cool, dry place.

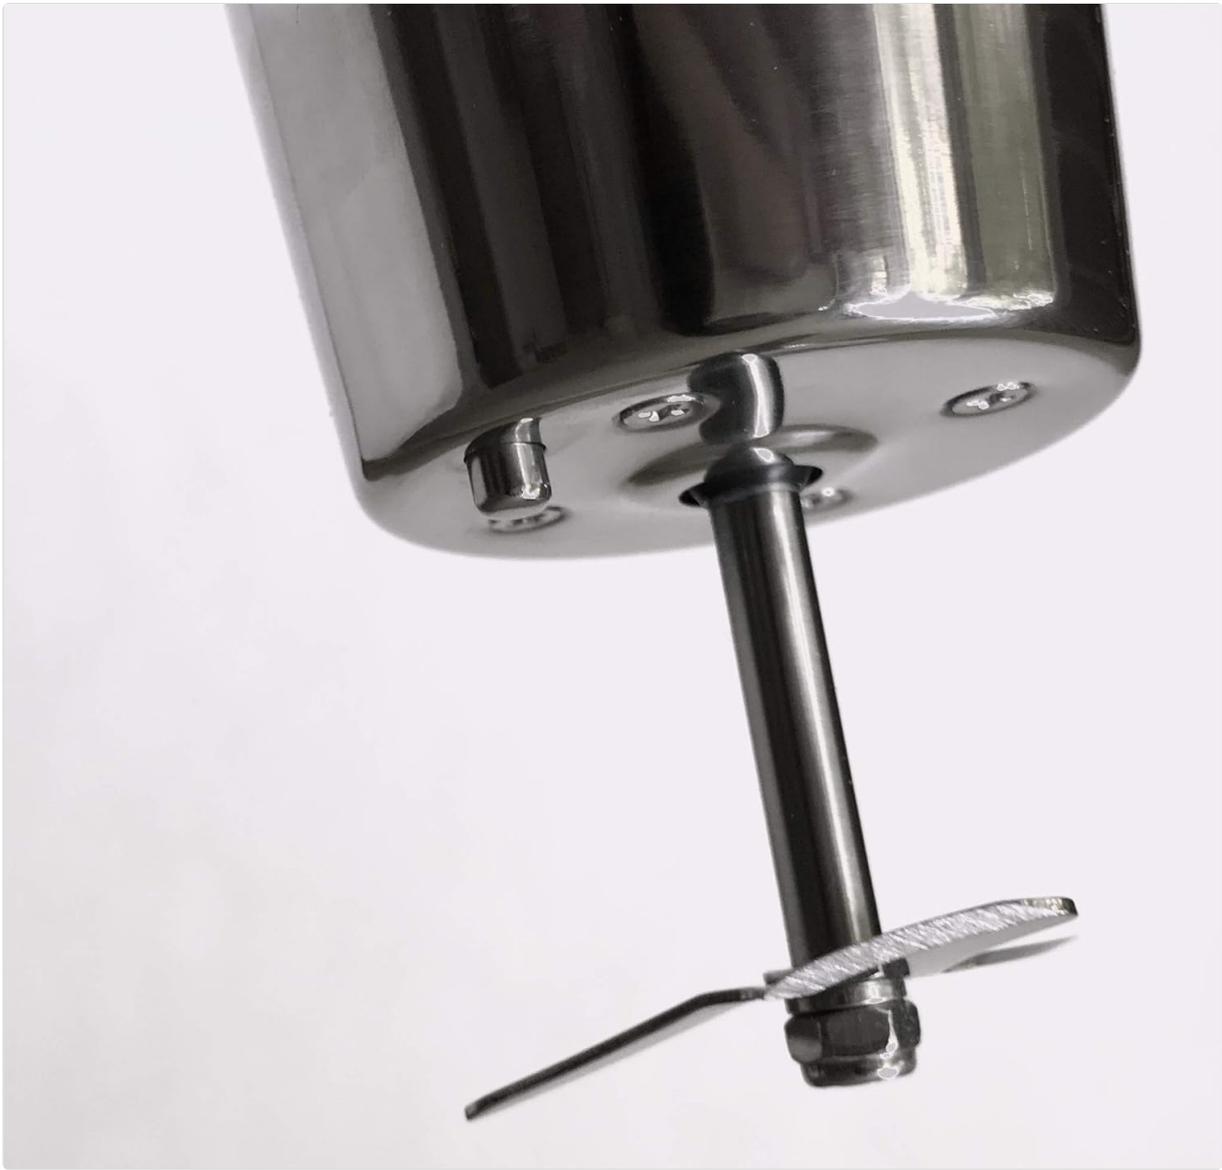


Image: Underside view of the SoyaPower G4 motor head, highlighting the electrical contacts that connect to the pitcher's handle.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not turn on.	Not plugged in; loose connection; power outage.	Ensure power cord is securely plugged into a working outlet. Check household circuit breaker.
Beeping continuously / Error code.	Water level too low/high; motor head not properly seated; overheating.	Adjust water level between MIN and MAX lines. Re-seat the motor head firmly. Allow unit to cool down if it has been running for a long time.
Milk/Soup is too thin or thick.	Incorrect ingredient-to-water ratio.	Adjust the amount of beans/grains/nuts or water according to desired consistency. Refer to recipes for optimal ratios.
Excessive foam during operation.	Common with certain ingredients (e.g., soybeans).	This is normal for some recipes. Ensure not to overfill the pitcher.

If the problem persists after trying these solutions, please contact customer support.

SPECIFICATIONS

- **Model:** SoyaPower G4
- **Capacity:** 1.3 Liters (Max fill 1200ml)
- **Dimensions:** 9 x 6 x 13 inches
- **Item Weight:** 6 pounds
- **Material:** Stainless Steel (grinding/cooking chamber), Thermo-plastic (outer liner)
- **Power Supply:** US Power Supply Only
- **Manufacturer:** Sanlinx Inc.

WARRANTY AND SUPPORT

The SoyaPower G4 comes with a manufacturer's warranty covering defects in materials and workmanship. Please refer to the warranty card included with your product for specific terms and conditions, including the warranty period and how to register your product.

For technical support, troubleshooting assistance, or warranty claims, please contact SoyaJoy customer service. Contact information can typically be found on the product packaging or the manufacturer's official website.

Manufacturer: Sanlinx Inc.

For more information, visit the [SoyaJoy Store on Amazon](#).