

Fender 6947000000

Fender Passport Venue PA Speaker System

Model: 6947000000

INTRODUCTION

The Fender Passport Venue PA Speaker System is a complete, self-contained, and highly portable sound system designed for a wide range of applications, from small gatherings to larger events. Its intuitive design and robust features make it an ideal choice for musicians, presenters, and anyone needing reliable, high-quality audio reinforcement. This manual provides essential information for setting up, operating, and maintaining your Passport Venue system.



Figure 1: The Fender Passport Venue PA Speaker System in its assembled configuration.

PACKAGE CONTENTS

Please ensure all items are present and in good condition upon unpacking your Fender Passport Venue system:

- Fender Passport Venue Mixer/Amplifier Unit
- Two Passive Speakers
- Speaker Cables (for connecting speakers to the mixer)
- Power Cable

KEY FEATURES

The Fender Passport Venue PA Speaker System offers a range of features designed for versatility and performance:

- **600 watts of output power:** Ample power for medium to large audiences.
- **Integrated 10-channel mixer:** Allows intuitive mixing of various audio sources, including lecture panels and musical ensembles.
- **International voltage operation (100V-120V / 220V-240V):** Ensures compatibility in various regions.
- **XLR and 1/4" mic/line inputs:** Provides flexible connectivity for microphones and line-level instruments.
- **USB-equipped:** Enables recording performances directly to a USB flash drive and playing audio files.
- **Bluetooth Wireless Connectivity:** For streaming audio wirelessly.

SETUP GUIDE

Setting up your Passport Venue system is quick and straightforward. Follow these steps for optimal performance:

1. **Unpack the System:** Carefully remove the mixer unit and two speakers from their packaging. The speakers detach from the main mixer unit for deployment.



Figure 2: Speakers detached from the mixer unit for setup.

2. **Position Speakers:** Place the two speakers on stable surfaces or speaker stands (not included) at an appropriate

distance from the mixer and facing your audience. Ensure the speaker cables can reach the mixer's output jacks.

3. **Connect Speakers:** Locate the speaker cable storage compartment on the back of the mixer unit. Connect the provided speaker cables from the 'LEFT' and 'RIGHT' speaker outputs on the mixer to the corresponding input jacks on each speaker.
4. **Power Connection:** Connect the power cable to the AC input on the rear of the mixer unit, then plug the other end into a grounded electrical outlet.
5. **Initial Power On:** Before connecting any audio sources, ensure all volume knobs on the mixer are turned down. Then, press the 'POWER' button to turn on the system. The power indicator light will illuminate.

Your browser does not support the video tag.

Video 1: Official Fender Passport Venue PA Speaker System overview, demonstrating portability and basic setup.

OPERATING INSTRUCTIONS

The Passport Venue mixer provides comprehensive control over your audio. Familiarize yourself with the control panel:





Figure 3: Detailed view of the mixer control panel.

Input Channels (1-10)

- **Volume Knobs:** Adjust the individual volume level for each channel.
- **Tone Knobs:** Control the tonal characteristics (bass/treble) for each channel.
- **Reverb Knobs:** Apply reverb effect to individual channels.
- **Pad Buttons:** Attenuate the input signal for high-output sources.
- **Input Jacks:** Channels 1-4 feature combination XLR/1/4" inputs. Channels 5-10 offer 1/4" and stereo RCA/3.5mm inputs.
- **Phantom Power:** Available on select XLR inputs for condenser microphones.

Master Controls

- **Master Volume:** Controls the overall output level of the system.
- **Output Meter:** Displays the output signal level.
- **USB Port:** For connecting a USB flash drive for recording or playback.
- **Bluetooth Pairing:** Use the 'PAIR' button to connect Bluetooth devices for wireless audio streaming.
- **Phones Out:** 3.5mm headphone jack for monitoring.
- **Mono Out:** 1/4" mono output for connecting to a powered monitor.
- **Sub Out:** 1/4" output for connecting an external powered subwoofer (e.g., Fender PS-512).

MAINTENANCE

Proper maintenance will ensure the longevity and optimal performance of your Fender Passport Venue system:

- **Cleaning:** Use a soft, dry cloth to clean the exterior surfaces. Avoid abrasive cleaners or solvents.
- **Storage:** Store the system in a cool, dry place away from direct sunlight and extreme temperatures. Ensure speakers are securely latched to the mixer unit for compact storage and transport.
- **Cable Management:** Always coil cables neatly after use to prevent tangling and damage.

- **Ventilation:** Ensure the ventilation openings on the unit are not blocked during operation to prevent overheating.

TROUBLESHOOTING

If you encounter issues with your Passport Venue system, refer to the following common troubleshooting tips:

Problem	Possible Solution
No Sound Output	Check power connection, ensure system is powered on, verify speaker cables are securely connected, check master volume and individual channel volumes. Ensure input sources are active and connected correctly.
Distorted Sound	Reduce input gain (use 'PAD' button if available), lower channel volume or master volume. Check for damaged cables or faulty input sources.
Humming/Buzzing Noise	Check all cable connections for looseness. Ensure proper grounding of power outlets. Try isolating the system from other electrical devices.
Bluetooth Pairing Issues	Ensure Bluetooth is enabled on your device and the Passport Venue. Press the 'PAIR' button on the mixer. Move your device closer to the system. Disconnect and re-pair if necessary.

If the problem persists after trying these steps, please contact Fender Customer Support.

TECHNICAL SPECIFICATIONS

- **Model Name:** Passport Venue Series 2
- **Speaker Type:** Portable
- **Output Wattage:** 600 Watts
- **Number of Channels:** 10 (Integrated Mixer)
- **Inputs:** XLR, 1/4" (Mic/Line), Stereo RCA, 3.5mm, USB
- **Outputs:** 3.5mm Headphones, 1/4" Mono, 1/4" Sub
- **Connectivity:** USB, Bluetooth
- **Product Dimensions (D x W x H):** 11" x 29" x 23"
- **Item Weight:** 45 Pounds
- **Power Source:** Corded Electric
- **Control Method:** Touch (Knobs/Buttons)
- **Audio Driver Type:** Dynamic Driver
- **Mounting Type:** Pole Mount

WARRANTY INFORMATION

The Fender Passport Venue PA Speaker System comes with a Limited Warranty. For detailed information regarding warranty coverage, terms, and conditions, please refer to the warranty card included with your product or visit the official Fender website. Keep your proof of purchase for warranty claims.


CUSTOMER SUPPORT

For further assistance, technical support, or service inquiries, please contact Fender Customer Support through their

official website or the contact information provided in your product documentation. You can visit the [Fender Store on Amazon](#) for more information.




Documents - Fender – 6947000000

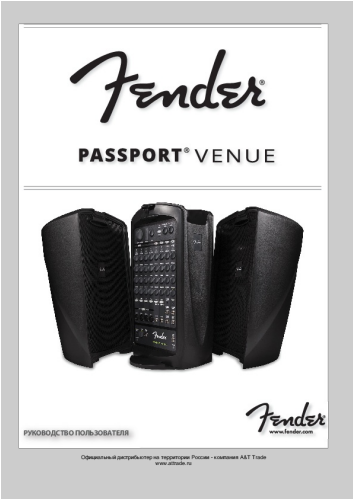

[\[pdf\]](#) Passport RevA RUS fm Akajin РУКОВОДСТВО ПОЛЬЗОВАТЕЛЯПоздравляем с приобретением звукоусилительной системы Fender® Passport® Venue! — это самодостаточная портативная усилительная система в которой есть 715c9eecf18531d2dba1adfaeec91c65mirm ru upload iblock e76 715c9eecf18531d2dba1adfaeec91c65 srsItd AfmBOoqU2DIkScCf1Pg9Tsr5RzwFxMOi4VdmNidHb6RYOqkBhqnnGTR ||| - A T Trade [www.atttrade.ru](#) : , . , . 1 . . 2. FF SPEAKER OUTPUT Passport . Fender Passport Rev A. 11 PR846 **6947000000** -120 , 60 6947000900 -120 , 60 DS 6947001900 -110 , 60 TW DS 6947003900 -240 , ... lang:no score:19 filesize: 3.36 M page_count: 12 document date: 2014-08-11



[\[pdf\]](#) User Manual Owner's Manual Installation Guide Instructions ENGLISH ESPAÑOL FRANÇAIS ITALIANO DEUTSCH The Passport s quick and easy set up its ability to cover large audiences simple Setup each of the other channels in same way Use channel 694700 audio manual all revA fmicassets Damroot Original 10002 ENGLISH ESPAOL FRANAIS PORTUGUS ITALIANO DEUTSCH POLSKI CESKY SLOVENSK SLOVENSCINA OWNER S MANUAL ... provided. Specifications TYPE: PART NUMBERS: POWER REQUIREMENT: FUSE: DIMENSIONS: WEIGHT: PR 846 **6947000000** 120V-, 60Hz 6947001900 110V-, 60Hz TW DS 6947004900 230V-, 50Hz UK 6947006900 230V... lang:en score:19 filesize: 61.18 M page_count: 56 document date: 2013-12-17

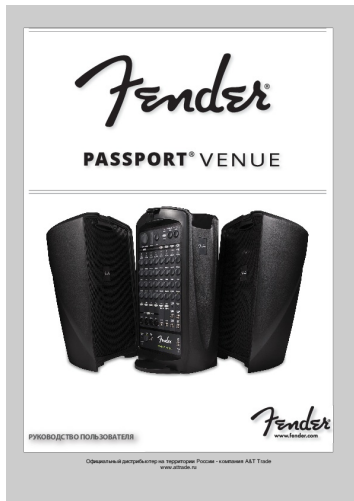

[\[pdf\]](#)


Passport RevA RUS fm Akajin 8d8d76f02094bdc74e0219f8d95be4c8 pult ru upload iblock 8d8 |||

- A T Trade www.atttrade.ru : , , , . 1. . 2. FF SPEAKER OUTPUT Passport . Fender

Passport Rev A. 11 PR846 **6947000000** -120 , 60 6947000900 -120 , 60 DS

6947001900 -110 , 60 TW DS 6947003900 -240 , ...

lang:no score:16 filesize: 3.36 M page_count: 12 document date: 2014-08-11

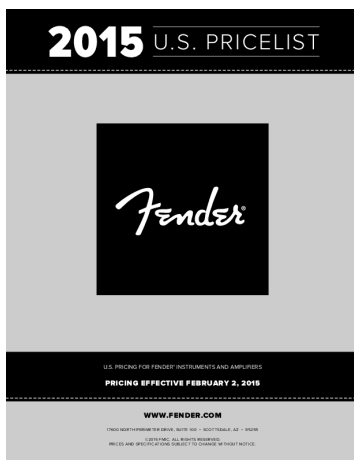

[\[pdf\]](#) Specifications Price List

2015 Fender BW Consumer Price List support fender library

2015 U.S. PRICELIST U.S. PRICING FOR FENDER INSTRUMENTS AND

AMPLIFIERS PRICING EFFECTIVE FEBRUARY 2, ... or Fender Instruments and

Amplifiers Fender Audio Passport Passport VENUE PART NUMBER DESCRIPTION

6947000000 Passport VENUE, 120V US Passport EVENT PART NUMBER

DESCRIPTION 6946000000 Passport EVENT,...

lang:nl score:15 filesize: 331.79 K page_count: 44 document date: 2015-04-27