Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Mount-It! MI-8402

Mount-It! MI-8402 Dual Shelf TV Wall Mount Bracket Instruction Manual

Model: MI-8402

Brand: Mount-It!

1. Introduction

This manual provides instructions for the safe and proper installation and use of your Mount-It! MI-8402 Dual Shelf TV Wall Mount Bracket. This product is designed to securely hold AV components below or above your wall-mounted television.

The MI-8402 features two tempered glass shelves and a high-strength steel frame, supporting various media devices.

2. Safety Information

- Read all instructions before installation.
- Ensure the mounting surface can support the combined weight of the mount, shelves, TV, and components.
- Do not exceed the maximum weight capacity of 22 lbs (10 kg) total for both shelves. The top shelf has a capacity of 6.6 lbs, and the bottom shelf has a capacity of 13.2 lbs.
- Use appropriate tools and hardware for installation. If unsure, consult a qualified professional.
- Keep children and pets away during installation.
- Regularly check all connections for tightness and stability.

3. Package Contents

Verify that all components are present before beginning installation.

- 2 x Metal Mounting Brackets
- 2 x Tempered Glass Shelves
- 4 x Shelf Supports (with suction cups)
- 4 x Shelf Clips
- Mounting Hardware (screws, washers)
- Instruction Manual


MOUNT-IT!
MOUNT-IT!

Image: All components of the Mount-It! MI-8402 Dual Shelf TV Wall Mount Bracket, including the metal frame and two tempered glass shelves.

4. Setup and Installation

This shelf system attaches directly to the VESA mounting holes on the back of your wall-mounted TV. It is compatible with VESA patterns up to 400x380mm.

4.1 Tools Required

- Phillips Head Screwdriver
- Power Drill (optional, for removing existing TV mount screws)
- Level (recommended)
- Second person for assistance

4.2 Installation Steps

1. **Prepare the TV:** Carefully remove your TV from its existing wall mount. This step requires at least two people for safety.
2. **Attach Shelf Supports to Metal Brackets:** Identify the left and right metal mounting brackets. Attach the shelf supports to the designated holes on the metal brackets using the provided screws. Ensure the shelf clips are loosely placed above the shelf support holes to allow for shelf insertion later.
3. **Mount Brackets to TV:** Align the metal mounting brackets with the VESA holes on the back of your TV. If your TV already has a back plate from a wall mount, place the metal brackets and any necessary washers between the TV and the back plate. Secure everything using the screws that originally held the TV mount.



Image: The metal mounting brackets being attached to the VESA holes on the back of a television, showing how the shelf system integrates with an existing TV mount.

4. **Re-mount TV:** With assistance, carefully re-mount your TV onto its wall bracket.
5. **Install Glass Shelves:** Slide the tempered glass shelves onto the shelf supports. Once in place, tighten the screws on the shelf clips to secure the shelves and prevent slipping.



Image: A person carefully sliding a tempered glass shelf onto the support arms of the wall mount bracket, demonstrating the final assembly step.

6. **Cable Management:** Organize cables from your AV components to the TV. The open design allows for flexible cable routing.

4.3 Versatile Configurations

The MI-8402 can be installed with shelves below the TV (standard configuration) or above the TV, depending on your setup requirements.

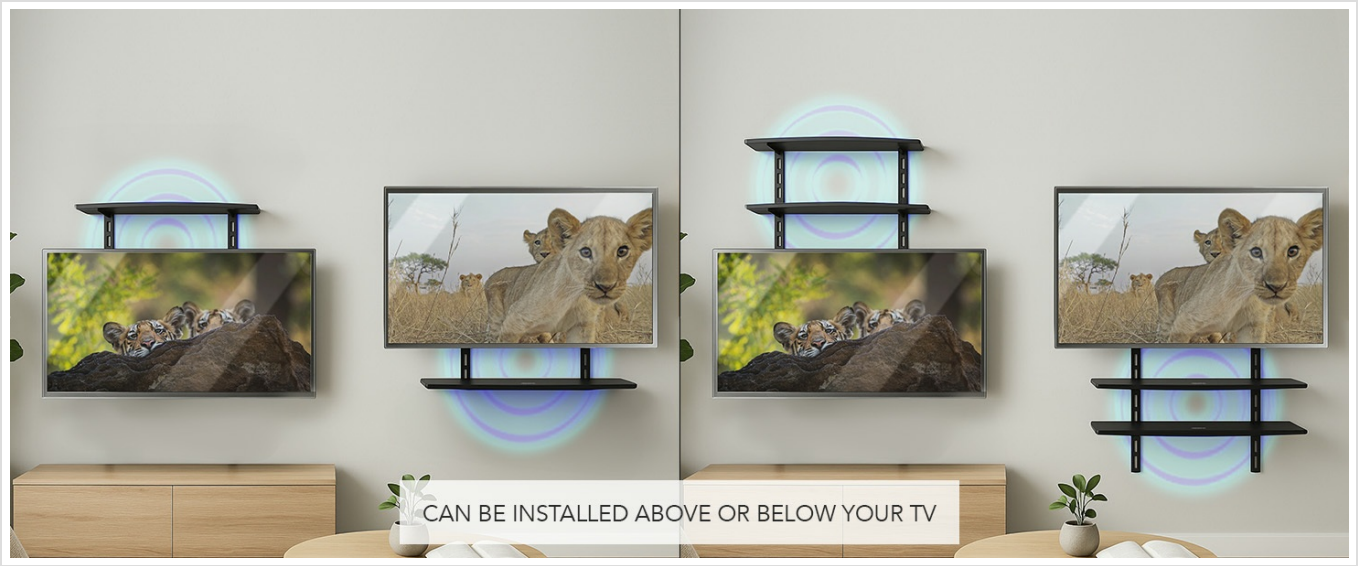


Image: A diagram illustrating two possible configurations for the MI-8402 shelf system: mounted below the television and mounted above the television, offering flexibility for different setups.

5. Operating Instructions

Once installed, the shelves provide a stable platform for your AV components.

- **Placement:** Carefully place your gaming consoles, DVD players, streaming devices, cable boxes, soundbars, or other AV components onto the tempered glass shelves.
- **Weight Distribution:** Distribute the weight evenly across the shelves. Do not overload.
- **Movement:** If your TV mount allows for articulation, the MI-8402 shelves will move with the TV, keeping your components aligned.

Your browser does not support the video tag.

Video: An official Mount-It! video demonstrating the features of the MI-8402 AV Component Shelf, including its ability to store various devices and move with an articulating TV mount.

6. Maintenance

- **Cleaning:** Clean the tempered glass shelves with a soft, damp cloth and a mild glass cleaner. Avoid abrasive cleaners.
- **Inspection:** Periodically check all screws and connections to ensure they remain tight and secure.
- **Weight Check:** Ensure that the total weight on the shelves does not exceed the specified capacity.

7. Troubleshooting

7.1 Shelf Sagging

If shelves appear to sag, ensure that:

- The weight on the shelves does not exceed the maximum capacity (6.6 lbs for top, 13.2 lbs for bottom).
- All shelf support screws are tightened securely.
- The weight is distributed as evenly as possible.

7.2 VESA Compatibility Issues

The MI-8402 is designed for VESA patterns up to 400x380mm. If the brackets do not align with your TV's VESA holes:

- Verify your TV's VESA pattern against the product specifications.
- Ensure the brackets are correctly oriented (left and right).

7.3 Cables Obstructed

If the metal brackets obstruct ports on your AV devices:

- Adjust the placement of your devices on the shelves if possible.
- Consider using angled cable connectors if space is extremely limited.

8. Specifications

Feature	Detail
Model	MI-8402
Mounting Type	Wall Mount (attaches to TV VESA)
Movement Type	Stationary (moves with TV's existing mount)
Brand	Mount-It!
Material	High Strength Steel, Tempered Glass
Color	Black
Compatible Devices	Television (with VESA mount), AV Components
UPC	852669498748
Maximum Supported Screen Size (for VESA)	Up to 400x380 mm VESA pattern
Minimum Supported Screen Size (for VESA)	10 Inches
Top Shelf Capacity	6.6 lbs (3 kg)
Bottom Shelf Capacity	13.2 lbs (6 kg)
Number of Shelves	2



Image: A technical drawing showing the dimensions of the MI-8402 dual shelf unit, including shelf capacities of 6.6 lbs for the top shelf and 13.2 lbs for the bottom shelf.

9. Warranty and Support

Mount-It! products are designed for durability and performance. For warranty information or technical support, please refer to the official Mount-It! website or contact their customer service.

Online Support: Visit the Mount-It! Store on Amazon for additional product information and support resources.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B00KVQH6NW

More documents and user manuals: **https://manuals.plus/**