

Zoook ZK-ZB-BTS51

ZOOOK ZB-BTS51 Bluetooth Music Receiver User Manual

Model: ZK-ZB-BTS51

1. INTRODUCTION

The Zoook 5-in-1 BluSense is a high-performance and stylish Bluetooth Headset that acts as a controller to your Smartphone/Tablet. This device enables any speaker-outfitted technology (headphones, earbuds, car stereos, home audio systems) with Bluetooth audio and hands-free calling capabilities. It allows you to use non-Bluetooth headphones wirelessly and take calls. The BluSense is compatible with various audio devices equipped with 3.5mm audio jacks and features a built-in rechargeable battery offering up to 7 hours of continuous audio playback.



Figure 1.1: Front view of the ZOOOK ZB-BTS51 Bluetooth Music Receiver.

2. PACKAGE CONTENTS

Please verify that all items listed below are present in your package:

- 1 x ZOOOK 5-in-1 BluSense Bluetooth Music Receiver
- 1 x Corded Stereo Earphone
- 1 x USB Charging Cable
- 1 x AC Charger

- 1 x User Manual (this document)



Figure 2.1: All components included in the ZOOOK ZB-BTS51 package.

3. PRODUCT FEATURES

- **Compact Design:** Super compact design for portability, with a built-in clip for attachment to clothing or bags.
- **Bluetooth Connectivity:** Adds Bluetooth-receiving capability to ordinary headphones, speakers, and other non-Bluetooth multimedia devices.
- **On-board Controls:** Integrated controls for Volume adjustment, Play/Pause, Next/Back track selection.
- **Included Earbuds:** Comes with a premium set of black Musicana ergonomic earbuds.
- **Easy Pairing:** Simple and quick pairing mode for connecting to your favorite devices.
- **Extended Battery Life:** Up to 7 hours of talk time or music playback, and up to 168 hours (7 days) of standby time. Full charge in 2 hours.
- **Multipoint Connection:** Supports connection to two phones simultaneously.
- **Voice Dialing/Redialing:** Features for convenient call management.
- **Universal Compatibility:** Equipped with a universal 3.5mm audio jack and micro USB charging contact.
- **VOIP Support:** Connects with computers for online chat.
- **5-in-1 Design:** Compatible with RCA cable, 3.5mm to 2.5mm audio cable, car AUX, home hi-fi systems, and high-quality headphones.

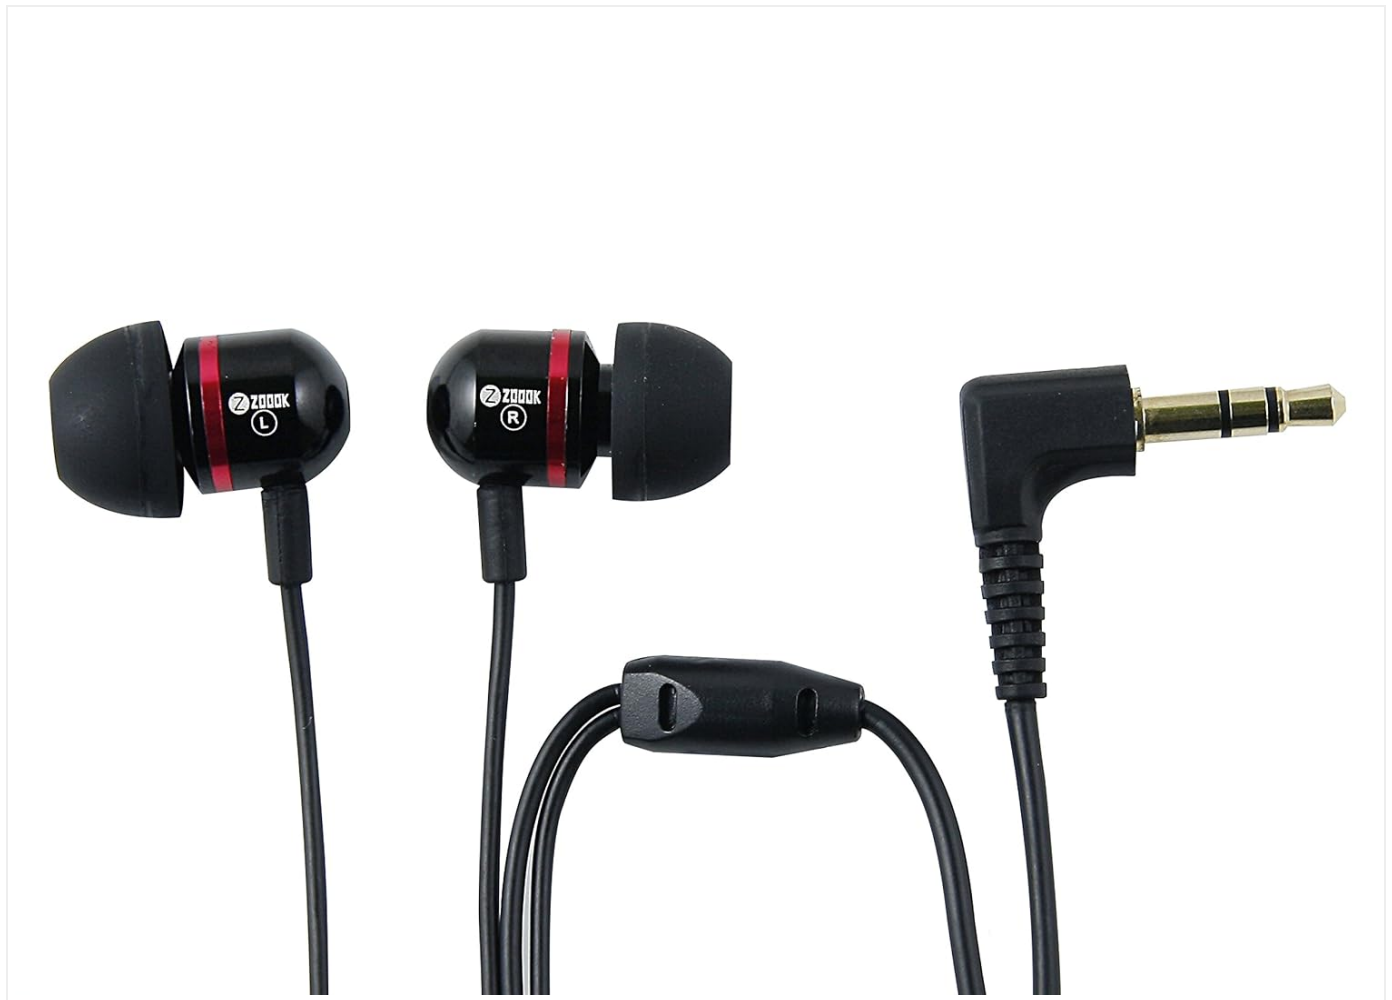


Figure 3.1: The ergonomic earbuds included with the BluSense receiver.

4. SETUP GUIDE

4.1. Charging the Device

1. Connect the small end of the USB charging cable to the micro USB port on the BluSense receiver.
2. Connect the larger end of the USB charging cable to the AC charger.
3. Plug the AC charger into a standard wall outlet.
4. The device will indicate charging status (e.g., an LED light). A full charge typically takes 2 hours.
5. Once fully charged, disconnect the charger.

4.2. Pairing with a Bluetooth Device

1. Ensure the BluSense receiver is charged.
2. Turn on the BluSense receiver by pressing and holding the power button (usually the call button) until the indicator light flashes, indicating pairing mode.
3. On your smartphone, tablet, or other Bluetooth-enabled device, go to the Bluetooth settings.
4. Enable Bluetooth and search for available devices.
5. Select "ZB-BTS51" or a similar name from the list of found devices.
6. Once paired, the indicator light on the BluSense receiver will change (e.g., solid blue or slow flashing) and your device may confirm the connection.
7. You can now connect your headphones or speakers to the BluSense receiver via the 3.5mm audio jack.



Figure 4.1: The BluSense receiver with earphones, showing the indicator light during operation.

5. OPERATING INSTRUCTIONS

5.1. Basic Controls

Button/Action	Function
Power Button / Call Button (often the central button)	◦ Press and hold: Power On/Off ◦ Short press: Play/Pause music, Answer/End call ◦ Double press: Redial last number ◦ Press and hold (during incoming call): Reject call
Volume Up / Next Track	◦ Short press: Increase volume ◦ Long press: Next track

Button/Action	Function
Volume Down / Previous Track	◦ Short press: Decrease volume ◦ Long press: Previous track

5.2. Wearing the Device

The BluSense receiver features a built-in clip, allowing you to conveniently attach it to your shirt collar, pocket, backpack strap, or other suitable locations for hands-free use.

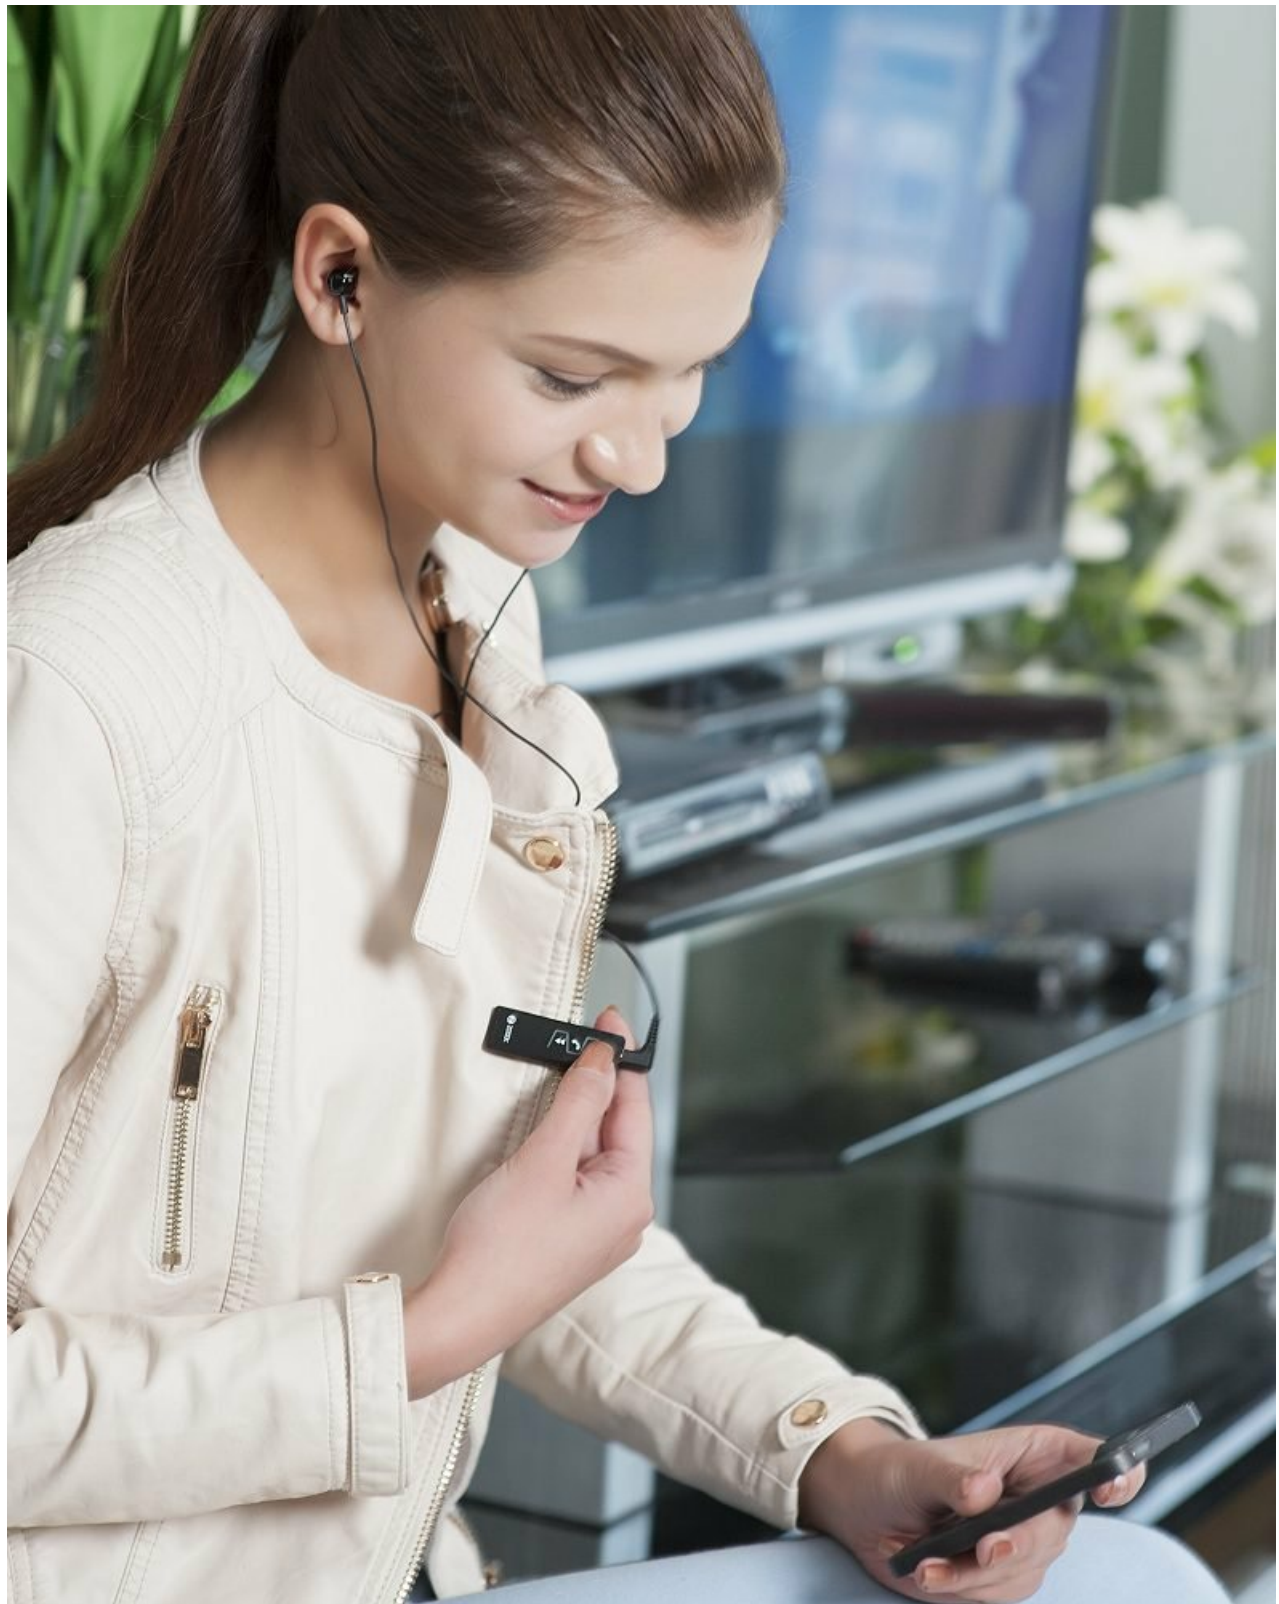


Figure 5.1: Demonstrating how to clip the BluSense receiver for convenient use.



Figure 5.2: The BluSense receiver in use during outdoor activity.

6. MAINTENANCE AND CARE

- Keep the device dry. Avoid exposure to moisture, rain, or liquids.
- Do not attempt to disassemble or modify the device. This will void the warranty.
- Clean the device with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.
- Store the device in a cool, dry place away from extreme temperatures.
- Avoid dropping or subjecting the device to strong impacts.

7. TROUBLESHOOTING

Problem	Possible Cause / Solution
Device does not power on.	◦ Battery is depleted. Charge the device fully. ◦ Ensure the power button is pressed and held long enough.
Cannot pair with a Bluetooth device.	◦ Ensure the BluSense is in pairing mode (flashing indicator light). ◦ Make sure Bluetooth is enabled on your source device. ◦ Move the BluSense closer to your source device. ◦ Clear previous Bluetooth connections on your source device and try pairing again.
No sound or poor sound quality.	◦ Check if the BluSense is properly connected to your headphones/speakers. ◦ Ensure volume levels are adjusted on both the BluSense and your source device. ◦ Verify that the BluSense is successfully paired and connected to your source device. ◦ Move closer to the source device to improve Bluetooth signal strength. ◦ If using the included earphones, ensure they are fully plugged in.
Voice not clear during calls.	◦ Ensure the microphone is not obstructed. ◦ Reduce background noise. ◦ Move closer to the paired phone.
Intermittent quirky sound.	◦ This may occur when there is no playback. Ensure a stable connection and try playing audio to see if it resolves. ◦ Move away from potential sources of interference (e.g., Wi-Fi routers, other Bluetooth devices).

8. SPECIFICATIONS

Feature	Detail
Brand	Zoook
Model Number	ZK-ZB-BTS51
Connectivity Technology	Bluetooth V3.0
Bluetooth Profiles	HFP/HSP/A2DP/AVRCP

Feature	Detail
Working Distance	Up to 30 feet (approx. 9 meters)
Compatible Devices	Headphones, Speakers, Smartphones, Tablets
Audio Output Mode	Stereo
Connector Type	3.5mm Jack
Power Source	Battery Powered
Music Playback/Talk Time	Up to 7 hours
Standby Time	Up to 168 hours (7 days)
Charging Time	Approximately 2 hours
Item Weight	110 g (0.24 lbs)
Microphone Format	Built-In

9. WARRANTY AND SUPPORT

The ZOOOK ZB-BTS51 Bluetooth Music Receiver comes with a **1 Year Limited Warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. For warranty claims, technical support, or any inquiries regarding your product, please contact Zook customer service. Refer to the official Zook website or your purchase documentation for the most current contact information. Please retain your proof of purchase for warranty validation.

© 2023 Zook. All rights reserved. Information subject to change without notice.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question