

OREI M8 Max

OREI Universal Travel Plug Adapter M8 Max Instruction Manual

Model: M8 Max

1. INTRODUCTION

The OREI M8 Max Universal Travel Plug Adapter is designed to provide power connectivity for your electronic devices in various countries worldwide. This adapter combines multiple plug types and USB charging ports into a single, compact unit, making it suitable for smartphones, tablets, cameras, and other dual-voltage electronics.

2. IMPORTANT SAFETY INFORMATION

- **Voltage Conversion:** This adapter **DOES NOT convert voltage**. It is a plug adapter only. Ensure your devices are dual voltage (100-240V) before connecting them. Using 110V-only devices (e.g., hair dryers, curling irons, straighteners) in a 220-240V country with this adapter will damage the device and potentially the adapter.
- Always connect the adapter to a power outlet before connecting your devices.
- Disconnect devices from the adapter before removing the adapter from the wall outlet.
- Do not expose the adapter to moisture or extreme temperatures.
- Do not attempt to disassemble or modify the adapter.

3. PRODUCT OVERVIEW

The OREI M8 Max features a main power strip unit with two USA-style AC outlets, three USB-A ports, and one USB-C port. It comes with several interchangeable plug attachments to adapt to different international wall outlets.

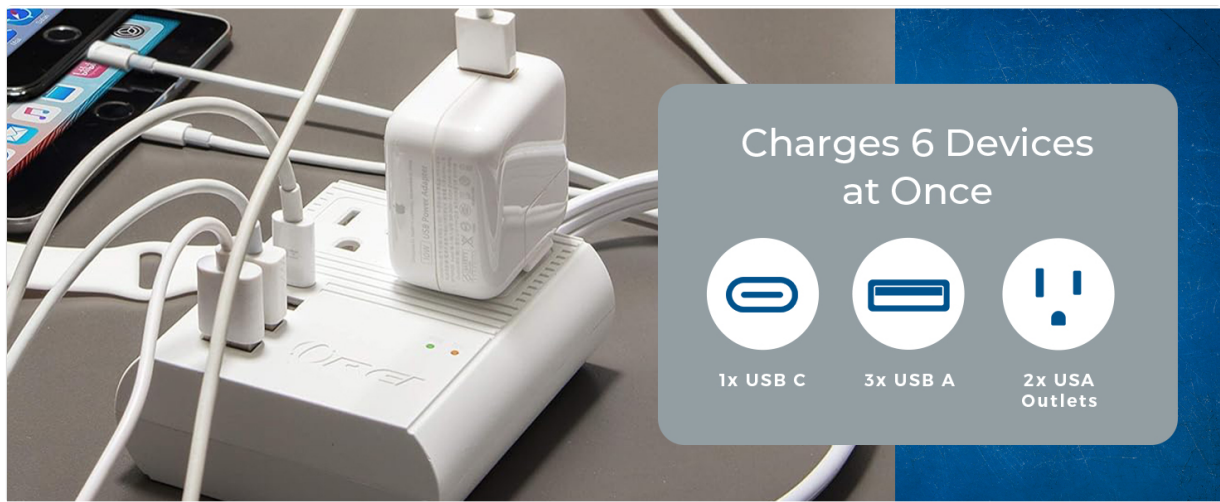


Figure 1: OREI M8 Max Adapter Components and Plug Types

The main unit includes a voltage light indicator and built-in surge protection for enhanced safety.

4. SETUP AND PLUG ATTACHMENT

The OREI M8 Max consists of a main power strip unit and a detachable power cable with interchangeable plug attachments. To set up the adapter for your destination:

1. Identify the correct plug type for your travel destination. The adapter supports Type A, B, C, I, G, and E/F plugs.
2. Attach the appropriate plug head to the powerstrip extension cable. Ensure it clicks securely into place.
3. Plug the assembled adapter into the wall outlet. The voltage indicator light on the main unit will illuminate if power is present.



Figure 2: Adapter used as a wall plug or with extension cable

The adapter can be used directly as a wall plug or as a power strip with the included extension cable, offering flexibility in various settings.

5. OPERATING INSTRUCTIONS

Once the adapter is securely plugged into a wall outlet, you can connect your electronic devices:

- **For AC Powered Devices:** Plug your dual-voltage devices (e.g., laptop chargers, camera battery

chargers) into the two USA-style AC outlets on the main unit.

- **For USB Powered Devices:** Connect your smartphones, tablets, or other USB-chargeable devices to the three USB-A ports (3.1A, 5V) or the one USB-C port (QC 3.0 18W).



OVER 10 YEARS
EXPERIENCE

FULL 1 YEAR
MANUFACTURING
SUPPORT

BASED IN THE
U.S.A
WE OFFER LIFETIME
LOCAL SUPPORT

Figure 3: Charging multiple devices with the OREI M8 Max

The adapter is designed to charge up to six devices simultaneously (2 AC, 3 USB-A, 1 USB-C).

6. COMPATIBILITY

The OREI M8 Max Universal Travel Plug Adapter is compatible with outlets in over 100 countries, including but not limited to:

- **Type A/B:** North America, Japan
- **Type C/E/F:** Most of Europe, Russia, parts of Asia
- **Type G:** United Kingdom, Ireland, Hong Kong, Singapore, UAE
- **Type I:** Australia, New Zealand, China, Argentina

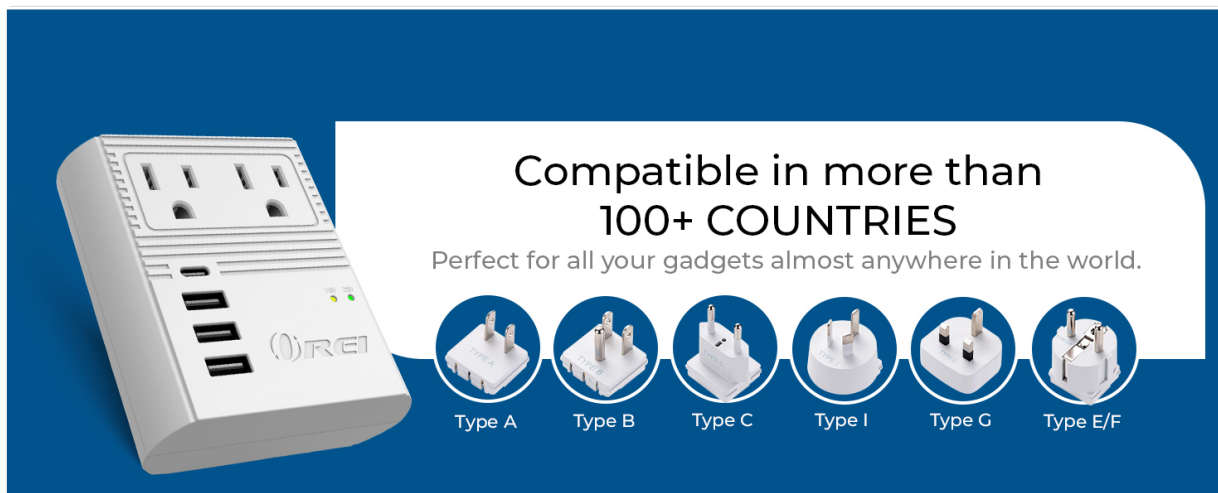


Figure 4: Supported International Plug Types

7. MAINTENANCE

- Keep the adapter clean and dry. Wipe with a soft, dry cloth.
- Store the adapter and its attachments in a cool, dry place when not in use.

- Avoid dropping the adapter or subjecting it to strong impacts.

8. TROUBLESHOOTING

- **No Power Indicator Light:** Ensure the adapter is fully plugged into the wall outlet and the correct plug attachment is securely connected. Check if the wall outlet is functional.
- **Device Not Charging:** Verify that your device is properly connected to the adapter. Confirm that your device is dual voltage (100-240V) if using the AC outlets. Check the device's charging cable for damage.
- **USB Ports Not Working:** Ensure the main adapter unit is receiving power. Try a different USB port or cable.
- **Adapter Feels Warm:** It is normal for the adapter to feel slightly warm during operation. If it becomes excessively hot or emits smoke/odor, immediately unplug it from the wall and discontinue use.

9. SPECIFICATIONS

Feature	Detail
Model Number	M8+
Brand	OREI
Color	White
Item Weight	0.5 Pounds (0.23 kg)
Item Dimensions (L x W x H)	2.5 x 2.5 x 2.5 inches (approximate for main unit)
Input Voltage	100-240 Volts AC (Adapter does not convert voltage)
Output Voltage (USB)	5 Volts
Number of Outlets	2x USA AC Outlets, 3x USB-A, 1x USB-C
USB-A Output	3.1A (Total for 3 ports)
USB-C Output	QC 3.0 18W
Plug Types Supported	Type A, B, C, I, G, E/F
Safety Features	Built-in Surge Protection

M8 MAX

TECHNICAL SPECIFICATIONS



Figure 5: OREI M8 Max Technical Specifications and Dimensions

10. WARRANTY AND SUPPORT

The OREI M8 Max Universal Travel Plug Adapter comes with a **1-Year Manufacturer's Warranty**. For technical assistance or warranty claims, please contact OREI customer support.

OREI offers **Lifetime Technical Support** for its products. For further assistance, please visit the official OREI website or contact their support team directly.

- **Website:** www.orei.com
- **Email:** Refer to the OREI website for current support contact information.