

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Energy Sistem](#) /
- › [Energy Sistem Tower 5 Bluetooth Speaker User Manual](#)

## Energy Sistem Tower 5

# Energy Sistem Tower 5 Bluetooth Speaker User Manual

Model: Tower 5 (422616)

[Introduction](#) [Components](#) [Setup](#) [Operation](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty](#)  
& Support

## 1. INTRODUCTION

---

The Energy Sistem Tower 5 Bluetooth Speaker is designed to deliver high-quality audio with versatile connectivity options. This 2.1 sound tower features 60 W of real output power, Bluetooth 4.0 technology for wireless audio streaming, and multiple playback options including FM Radio, USB port, and SD/SDHC card reader. It is equipped with EQ modes to customize sound characteristics and a touch panel for easy control. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance and longevity of your device.



Image 1.1: Front view of the Energy System Tower 5 Bluetooth Speaker.

## 2. PRODUCT COMPONENTS AND CONTROLS

---

### 2.1 Top Panel Controls and Display

The top panel of the Tower 5 features a touch-sensitive interface and a digital display for easy navigation and control of various functions.



Image 2.1: Top panel with touch controls and digital display, showing FM radio frequency.

## 2.2 Connectivity Ports

The speaker offers multiple ports for diverse audio sources and device charging.

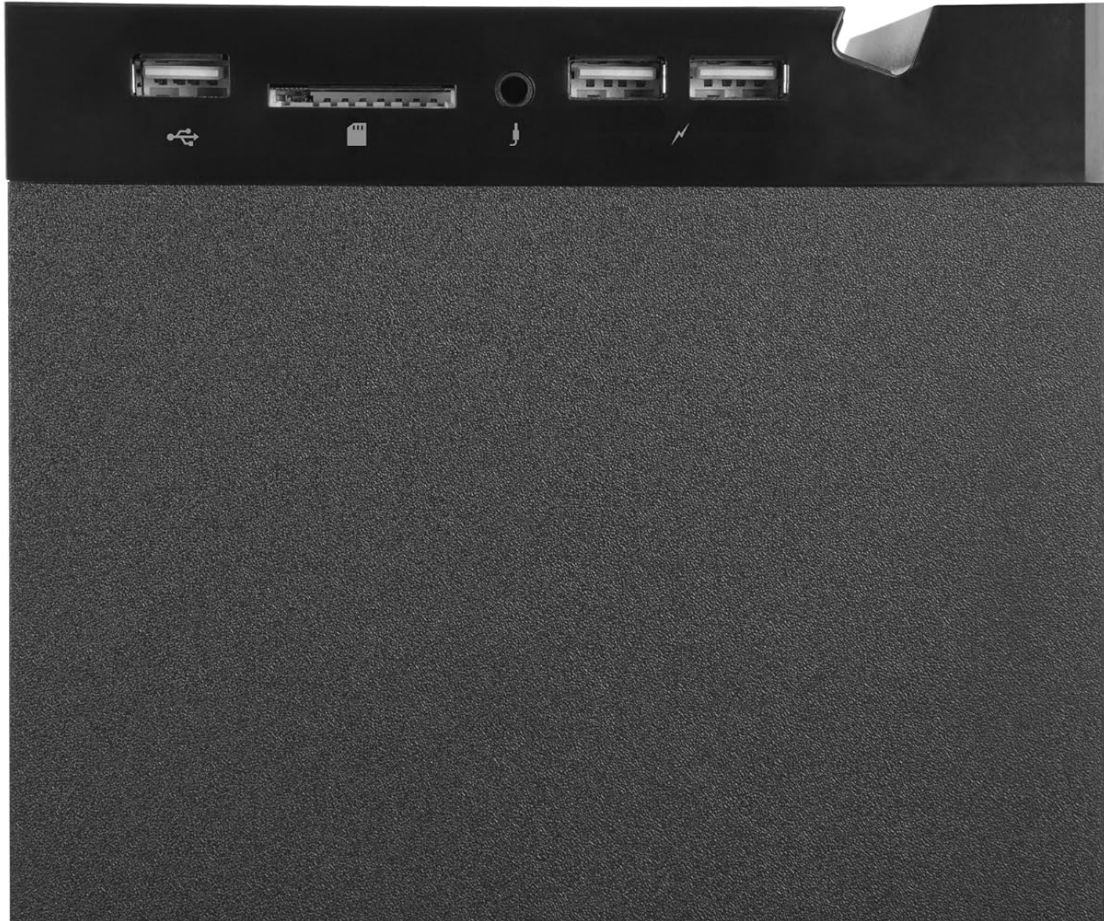


Image 2.2: Top panel connectivity ports including USB, SD/SDHC card reader, and auxiliary input.

### 2.3 Remote Control

A remote control is included for convenient operation from a distance.



Image 2.3: Remote control in use, demonstrating USB playback.

## 2.4 Device Holder and Charging

The top of the speaker includes a holder for smartphones or tablets, along with USB ports for charging.



Image 2.4: Smartphone charging in the integrated top holder.

## 3. SETUP GUIDE

---

### 3.1 Unpacking and Placement

1. Carefully remove the speaker and all accessories from the packaging.
2. Place the speaker on a stable, flat surface. Ensure adequate ventilation around the unit.
3. For optimal sound, position the speaker in a central location within the room.

### 3.2 Power Connection

1. Connect the power cable to the AC input on the rear of the speaker.
2. Plug the other end of the power cable into a standard wall outlet.
3. The speaker will enter standby mode.

## 4. OPERATING INSTRUCTIONS

---

### 4.1 Power On/Off

- Press the Power button on the top panel or remote control to turn the speaker on or off.

### 4.2 Bluetooth Pairing

1. Turn on the speaker. The display will show the current mode.
2. Press the 'Mode' button on the top panel or remote until 'BT' appears on the display. The speaker is now in Bluetooth pairing mode.
3. On your mobile device, enable Bluetooth and search for available devices.
4. Select 'Energy Sistem Tower 5' from the list. Once paired, a confirmation sound will play.

### 4.3 USB/SD Card Playback

1. Insert a USB flash drive or SD/SDHC card (up to 64 GB) containing MP3 files into the corresponding port on the top panel.
2. The speaker will automatically switch to USB or SD mode and begin playback. If not, press the 'Mode' button to select the correct source.
3. Use the Play/Pause, Next/Previous Track buttons on the top panel or remote to control playback.

### 4.4 FM Radio

1. Press the 'Mode' button until 'FM' appears on the display.
2. To auto-scan and save stations, press and hold the Play/Pause button. The speaker will scan and store available FM stations.
3. Use the Next/Previous Track buttons to navigate through saved stations.

### 4.5 Auxiliary Input

1. Connect an external audio device (e.g., MP3 player, laptop) to the AUX IN port on the top panel using a 3.5mm audio cable.
2. Press the 'Mode' button until 'AUX' appears on the display.
3. Control playback from your connected device.

### 4.6 Volume and EQ Control

- Use the Volume Up/Down buttons on the top panel or remote control to adjust the sound level.
- The speaker features EQ modes to adjust sound characteristics. Press the 'EQ' button on the remote control to cycle through available equalizer presets (e.g., Normal, Rock, Pop, Classic, Jazz).

### 4.7 Official Product Video

Watch the official product video for a visual guide on the Energy Sistem Tower 5's features and usage scenarios.

Your browser does not support the video tag.

Video 4.1: A short preview video showcasing the key features of the Energy Sistem Tower 5 Bluetooth Speaker, including its design, EQ modes, and top holder functionality.

Your browser does not support the video tag.

Video 4.2: Official product video demonstrating the Energy Sistem Tower 5 in various home settings, highlighting its Bluetooth connectivity,

USB/card reader, FM radio, and touch controls for an immersive audio experience.

## 5. MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the speaker. Do not use abrasive cleaners or solvents.
- **Storage:** When not in use for extended periods, store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Ventilation:** Ensure the speaker's ventilation openings are not blocked to prevent overheating.

## 6. TROUBLESHOOTING

---

Problem	Possible Cause	Solution
No power	Power cable not connected; Power outlet not active.	Check power cable connection; Try a different power outlet.
No sound	Volume too low; Incorrect input mode selected; Device not properly connected.	Increase volume; Select correct input mode (BT, USB, SD, AUX, FM); Reconnect device.
Bluetooth pairing fails	Speaker not in pairing mode; Device too far; Bluetooth disabled on source device.	Ensure speaker is in BT mode; Move device closer; Enable Bluetooth on source device.
USB/SD card not recognized	Incorrect file format; Card/drive corrupted; Capacity exceeds 64 GB.	Ensure files are MP3; Try a different card/drive; Use cards/drives up to 64 GB.

## 7. TECHNICAL SPECIFICATIONS

---

- **Model Name:** Tower 5
- **Model Number:** 422616
- **Speaker Type:** Tower
- **Output Power:** 60 Watts (RMS)
- **Connectivity Technology:** Bluetooth 4.0, USB, SD/SDHC, Auxiliary (3.5mm)
- **Control Method:** Touch panel, Remote control
- **Compatible Devices:** Gaming Console, Laptop, MP3 Player, Smartphone, Tablet, Television
- **Special Features:** EQ modes, Device holder, USB charging ports
- **Dimensions (LxWxH):** 15 x 15 x 100 cm
- **Item Weight:** 5.21 kg
- **Power Source:** AC Powered
- **Color:** Black

## 8. WARRANTY AND SUPPORT

---

The Energy Sistem Tower 5 Bluetooth Speaker comes with a standard 1-year warranty. For warranty claims, technical support, or further information, please visit the official Energy Sistem store or contact customer service.

**Official Brand Store:** [Energy Sistem Store on Amazon.in](#)



