

EUG X760+(A)

EUG X760+ LED Projector User Manual

Model: X760+(A) | Brand: EUG

1. INTRODUCTION

The EUG X760+ LED Projector is a versatile multimedia device designed for home cinema and business applications. Featuring an integrated Android operating system, it supports wireless connectivity options like Airplay, Miracast, and DLNA, allowing seamless content sharing from various devices. With a native resolution of 1024 x 600 and support for 1080p, it delivers clear visuals. The projector boasts 2600 lumens brightness and a 2500:1 contrast ratio, ensuring a vibrant viewing experience. Its LED light source offers a long lifespan of up to 50,000 hours, contributing to energy efficiency and reduced maintenance.



Figure 1.1: Front view of the EUG X760+ LED Projector, showcasing its lens and ventilation.



Figure 1.2: Various angles of the EUG X760+ LED Projector, highlighting its compact design and connectivity options.

2. SETUP

2.1 Placement

The EUG X760+ projector offers flexible placement options to suit various environments. It can be positioned on a desk, mounted to the ceiling, or placed on a tripod. Ensure the projector is placed on a stable, level surface or securely mounted to prevent accidental movement.



Figure 2.1: Illustration of various projector placement methods: on a desk, ceiling-mounted, and on a tripod/bracket.

2.2 Initial Adjustments

After placing the projector, perform the following adjustments for optimal image quality:

- **Focus Adjustment:** Rotate the focus ring on the projector lens until the projected image appears sharp and clear.
- **Keystone Correction:** Use the vertical keystone correction dial (typically located near the rear ports) to adjust the image shape if it appears trapezoidal. The projector supports $\pm 15^\circ$ vertical keystone correction.
- **Image Flip:** If ceiling mounted or rear projected, use the 360° image flip function in the projector settings to orient the image correctly.



Figure 2.2: Rear panel of the projector, indicating the location of various input ports and the vertical keystone adjustment dial.



Figure 2.3: Side view of the projector, detailing the indicator light, power button, direction operation controls, and menu/source buttons.

3. OPERATING INSTRUCTIONS

3.1 Connectivity

The EUG X760+ projector offers a wide range of connectivity options:

- **HDMI:** Connect to laptops, PCs, gaming consoles (PS4/Xbox), and TV boxes.
- **USB:** Two USB ports allow direct playback of movies, videos, and images from a USB stick.
- **VGA:** For connecting older computers or laptops.
- **TV:** For connecting to television signals.
- **RCA Audio Input:** For analog audio connections.
- **YPBPR:** Component video input.

3.2 Smart Features (Android OS)

Built with an Android operating system, the projector provides smart functionalities:

- **Wi-Fi Connectivity:** Connect to your home network for online content.
- **App Installation:** Directly download and install applications for streaming, browsing, and more.
- **Wireless Screen Sharing:** Supports Airplay, Miracast, and DLNA for wirelessly sharing content from Android devices, iOS devices (iPad/iPhone/Mac), and laptops.



Figure 3.1: The projector's interface showing various application icons, indicating its ability to watch online videos and install apps.



Figure 3.2: Demonstrates the multi-screen experience, with the projector wirelessly connected to various devices like smartphones, tablets, and laptops.

3.3 Media Playback

The projector is compatible with a wide range of media formats. You can stream movies directly from a USB stick or utilize the built-in Android system to access online content. The integrated speaker provides audio, or you can connect external audio systems via the RCA audio output.

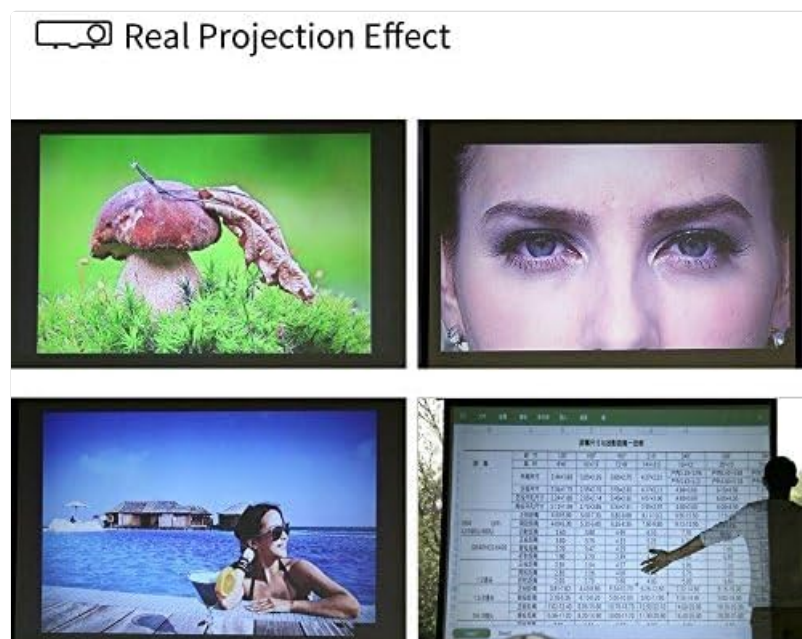


Figure 3.3: Examples of actual projected images, showcasing the visual quality for various content types.

4. MAINTENANCE

To ensure the longevity and optimal performance of your EUG X760+ projector, follow these maintenance guidelines:

- **Cleaning:** Regularly clean the projector lens with a soft, lint-free cloth designed for optical surfaces. Use a can of compressed air to clear dust from ventilation grilles. Ensure the projector is turned off and unplugged before cleaning.
- **Ventilation:** Do not block the ventilation openings. Ensure adequate airflow around the projector to prevent overheating.
- **Storage:** When not in use for extended periods, store the projector in a cool, dry, dust-free environment.

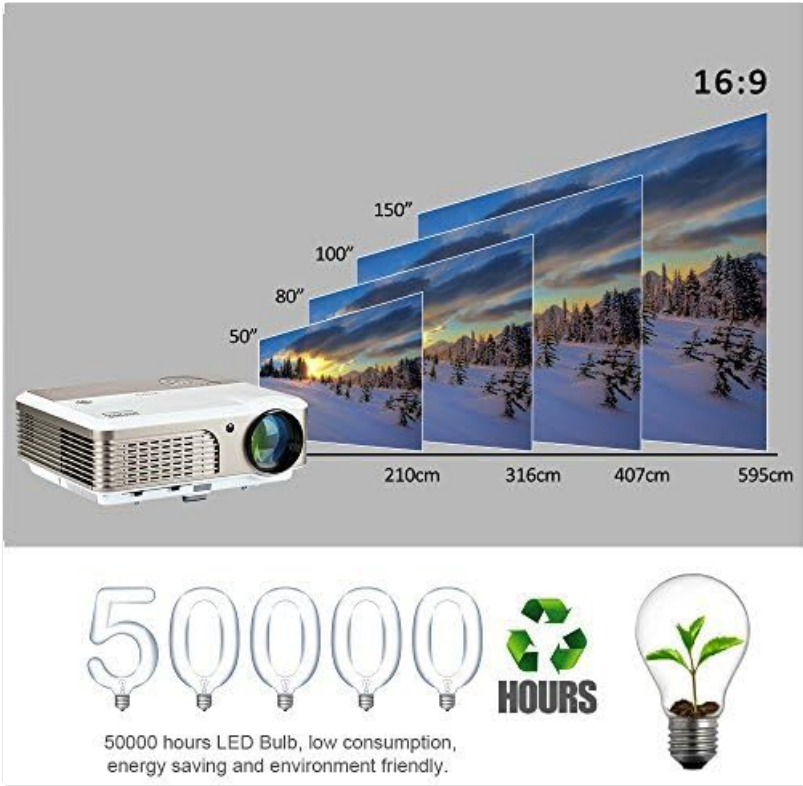


Figure 4.1: Illustrates various projection distances and corresponding screen sizes, along with an emphasis on the 50,000-hour lifespan of the LED bulb.

5. TROUBLESHOOTING

If you encounter issues with your projector, refer to the table below for common problems and their solutions. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
No image projected	Power cable disconnected; Incorrect input source; Lens cap on.	Check power connection; Select correct input source (HDMI, VGA, etc.); Remove lens cap.
Image is blurry	Out of focus; Incorrect projection distance.	Adjust the focus ring; Ensure projector is within recommended projection distance.
Image is trapezoidal	Incorrect keystone adjustment.	Adjust the vertical keystone correction dial.
No sound	Volume too low; Muted; External audio device not connected properly.	Increase volume; Unmute; Check external audio connections.

Problem	Possible Cause	Solution
Wi-Fi connection issues	Incorrect password; Router too far; Network interference.	Verify Wi-Fi password; Move projector closer to router; Reduce interference.

6. SPECIFICATIONS

Feature	Detail
Brand	EUG
Model Number	X760+(A)
Product Dimensions	26.5 x 14 x 34 cm; 4.9 kg
Date First Available	28 Feb. 2015
Recommended Uses	Home Cinema, Business
Special Features	USB Connectivity, Built-In Wi-Fi
Connectivity Technology	Wi-Fi, USB, HDMI
Display Resolution	1280 x 600 (Native)
Display Resolution Maximum	1280 x 720 (Supported)
Display Type	LED
Form Factor	Portable
Mounting Type	Tabletop Mount
Brightness	2600 Lumen
Contrast Ratio	2500:1
Keystone Correction	±15° Vertical
Lamp Life	Up to 50,000 hours (LED)

7. WARRANTY AND SUPPORT

The EUG X760+ LED Projector comes with a manufacturer's warranty. Please refer to the warranty card included with your product for specific terms and conditions, including the warranty period and coverage details. For technical support, troubleshooting assistance, or service inquiries, please visit the official EUG website or contact their customer service

department. Keep your purchase receipt as proof of purchase for warranty claims.

© 2024 EUG. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question