

Truper DECA-25X

TRUPER DECA-25X 25 ft Steel Core Drain Cleaner User Manual

Model: DECA-25X

1. INTRODUCTION

This manual provides comprehensive instructions for the safe and effective use, maintenance, and troubleshooting of the TRUPER DECA-25X 25 ft Steel Core Drain Cleaner. Please read this manual thoroughly before operating the device to ensure proper function and user safety.



Figure 1: The TRUPER DECA-25X 25 ft Steel Core Drain Cleaner.

2. SAFETY INFORMATION

WARNING: Drain cleaning can involve contact with hazardous materials. Always prioritize safety.

- Wear appropriate personal protective equipment (PPE), including safety glasses and protective gloves, to prevent contact with drain contents and the steel cable.
- Ensure the work area is well-ventilated, especially if chemical drain cleaners have been used previously.
- Keep children and pets away from the work area.
- Do not ingest any substances encountered during drain cleaning.
- After use, dispose of any collected debris and clean the tool in accordance with local regulations.
- Avoid contact with skin and eyes. In case of accidental contact, rinse immediately with plenty of water and seek medical advice.

3. PRODUCT COMPONENTS

Familiarize yourself with the parts of your TRUPER DECA-25X Drain Cleaner:



Figure 2: TRUPER DECA-25X Drain Cleaner with key components labeled. These include the polypropylene drum casing, quick-release lock, spiral tip, and non-slip TPR covered handle.

- **Polypropylene Drum Casing:** Houses the steel core cable.
- **Quick-Release Lock:** Secures the cable at the desired length.
- **Spiral Tip:** Designed to grab and break up clogs.
- **Non-Slip TPR Covered Handle:** Provides a secure grip during operation.
- **Crank Handle:** Used to rotate the cable manually.
- **1/4" Shank:** Allows attachment to a power drill for motorized operation.

4. SETUP

Before beginning, ensure you have adequate lighting and access to the drain opening.

1. **Prepare the Area:** Place old towels or a bucket under the drain to catch any water or debris that may come out.
2. **Access the Drain:** Remove any drain covers or stoppers. For sinks, it may be necessary to remove the P-trap for direct access to the drain pipe.
3. **Inspect the Cable:** Ensure the steel core cable is free from kinks or damage.

5. OPERATING INSTRUCTIONS

The TRUPER DECA-25X can be operated manually or with a power drill.

5.1 Manual Operation

1. **Insert the Cable:** Loosen the quick-release lock. Carefully feed the spiral tip of the cable into the drain opening.
2. **Advance the Cable:** Push the cable into the pipe until resistance is met. This indicates you have reached the clog or a bend in the pipe.
3. **Secure and Rotate:** Tighten the quick-release lock to secure the cable at the desired length. Use the crank handle to rotate the cable clockwise while gently pushing it forward. This rotation helps the spiral tip bore through the clog or navigate bends.
4. **Work Through the Clog:** Continue rotating and pushing until the resistance lessens, indicating the clog has been broken up or retrieved.
5. **Retrieve the Cable:** Once the clog is cleared, slowly pull the cable back while rotating it counter-clockwise. This helps to clean the cable and prevent it from getting stuck.
6. **Test the Drain:** Run hot water down the drain for several minutes to flush away any remaining debris.

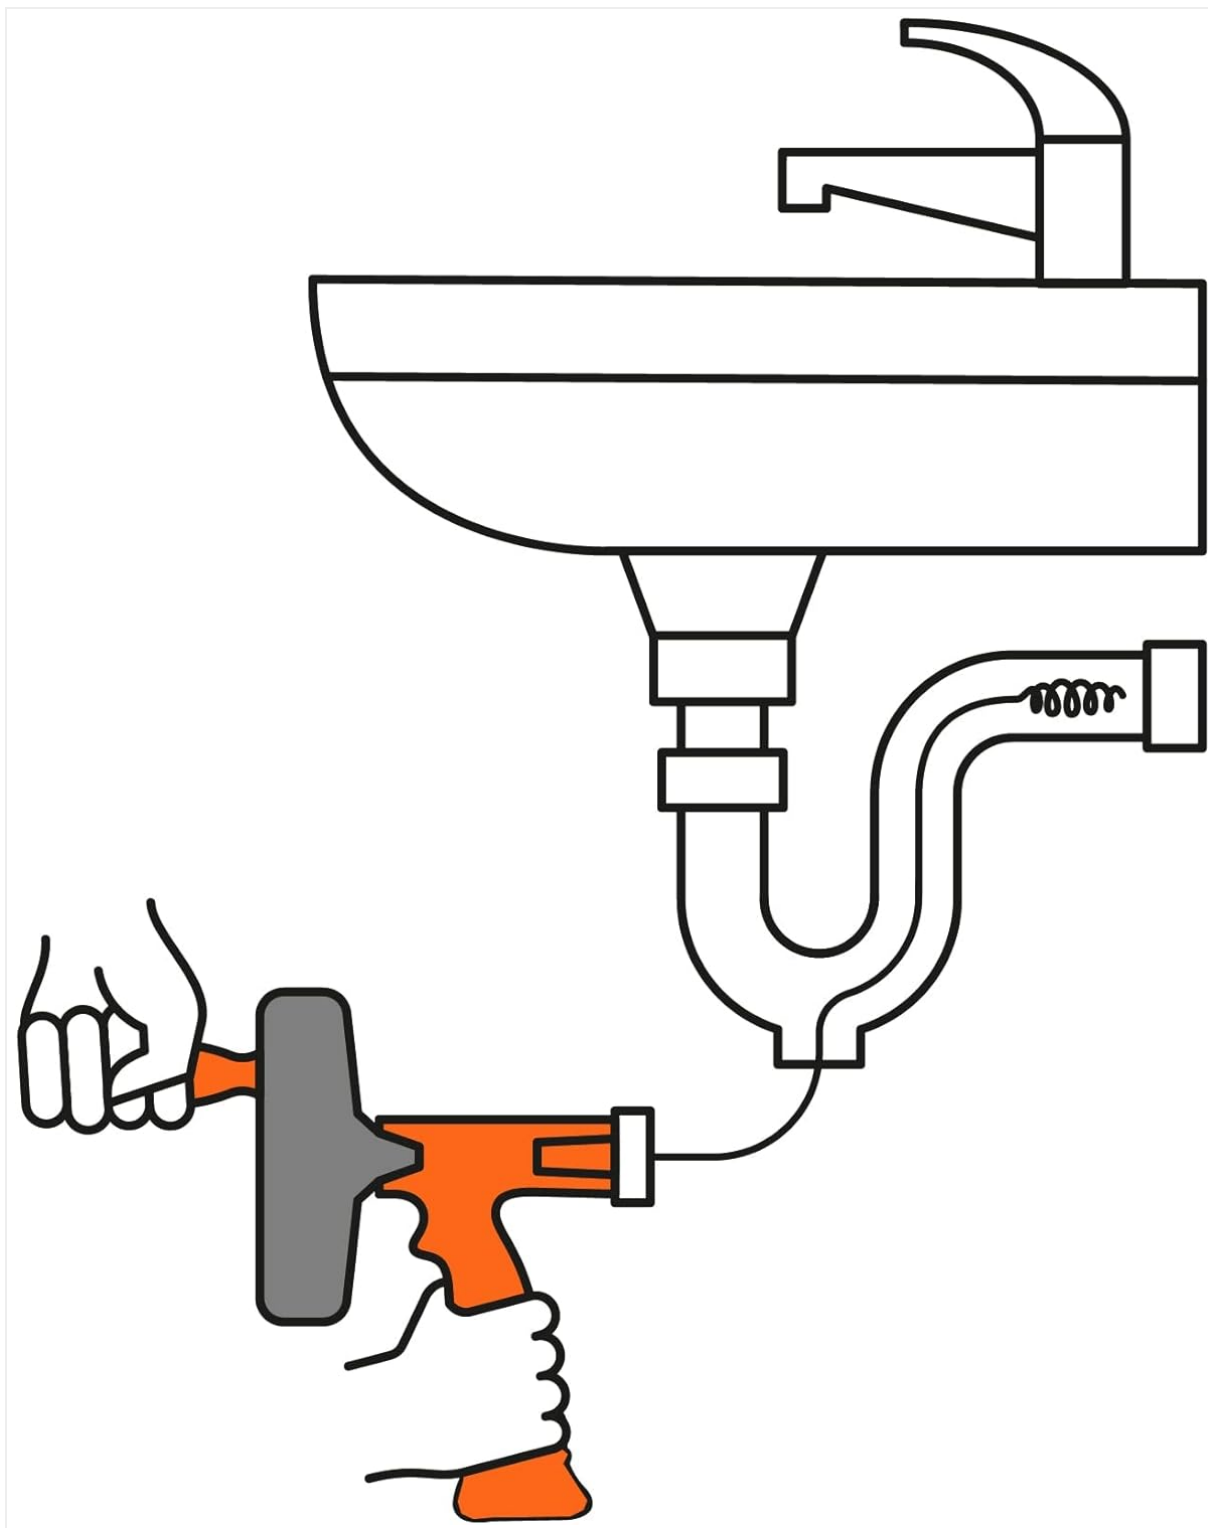


Figure 3: Manual operation of the drain cleaner, showing the cable being fed into a sink drain.

5.2 Power Drill Operation

For tougher clogs or extended use, the DECA-25X can be attached to a power drill.

1. **Attach Drill:** Insert the 1/4" shank of the drain cleaner into the chuck of a power drill and tighten securely.
2. **Set Drill to Low Speed:** Always start with the drill set to a low speed and a forward (clockwise) rotation.
3. **Insert and Advance:** Loosen the quick-release lock. Feed the cable into the drain. Once resistance is met, tighten the quick-release lock.
4. **Operate Drill:** Gently squeeze the drill trigger to rotate the cable while slowly pushing the drain

cleaner forward. Do not force the cable. Allow the rotating tip to work through the obstruction.

5. **Clear the Clog:** Continue until the clog is cleared. If the cable binds, reverse the drill direction briefly to free it, then resume forward rotation.
6. **Retrieve Cable:** With the drill in reverse (counter-clockwise) and at a low speed, slowly pull the cable back into the drum.
7. **Test the Drain:** Run hot water down the drain to flush out any remaining debris.

Zanco de 1/4" para usar con taladro



Figure 4: The TRUPER DECA-25X Drain Cleaner with its 1/4" shank attached to a power drill for motorized operation.

6. MAINTENANCE

Proper maintenance extends the life of your drain cleaner.

- **Cleaning:** After each use, extend the entire cable and thoroughly clean it with water to remove any debris.
- **Drying:** Completely dry the steel cable to prevent rust. You can use a cloth or allow it to air dry.
- **Lubrication:** Apply a light coat of machine oil or lubricant to the steel cable to prevent corrosion and ensure smooth operation during storage.
- **Storage:** Store the drain cleaner in a dry place, away from direct sunlight and extreme temperatures.
- **Inspection:** Periodically inspect the cable for kinks, fraying, or damage. Replace the cable if significant wear is observed.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Cable does not advance	Quick-release lock is too tight; cable is kinked; severe obstruction.	Loosen quick-release lock. Inspect cable for kinks and straighten. Apply gentle rotation and pressure. If using a drill, ensure it's on low speed.

Problem	Possible Cause	Solution
Cable gets stuck	Cable caught on a pipe bend or part of the clog.	Gently pull back while rotating. If using a drill, briefly reverse direction to free it, then resume forward. Do not force.
Clog not clearing	Clog is too dense or made of material the spiral tip cannot break (e.g., solid object).	Ensure proper rotation and consistent pressure. Try both manual and drill operation. If unsuccessful, the clog may require professional intervention.
Cable is rusty	Improper drying or lubrication after use.	Clean and dry the cable thoroughly after each use. Apply a light coat of machine oil before storage.

8. SPECIFICATIONS

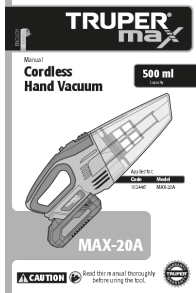
Feature	Detail
Model Number	DECA-25X
Brand	Truper
Cable Length	25 feet
Cable Material	Steel Core
Item Weight	3.56 pounds (1.62 kg)
Product Dimensions	6.8 x 11.6 x 7.3 inches
Shank Size (for drill)	1/4 inch

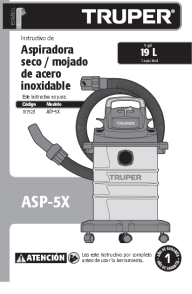


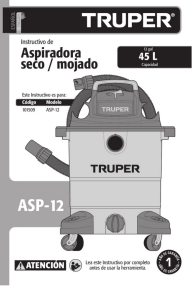

9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the official Truper website or contact their customer service department. Keep your purchase receipt as proof of purchase.

© 2025 Truper. All rights reserved.

Related Documents - DECA-25X

	<p>Truper MAX Cordless Hand Vacuum User Manual</p> <p>Comprehensive user manual for the Truper MAX Cordless Hand Vacuum (Model MAX-20A, Code 102446). Includes technical specifications, safety guidelines, assembly instructions, operation details, maintenance procedures, troubleshooting tips, authorized service center information, and warranty policy.</p>
-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

 <p>TRUPER Instrucciones de Aspiradora seco / mojado de acero inoxidable 19 L Modelo ASP-5X ATENCION</p>	<p>TRUPER ASP-5X Stainless Steel Wet/Dry Vacuum Cleaner User Manual</p> <p>Comprehensive user manual for the TRUPER ASP-5X stainless steel wet/dry vacuum cleaner. Includes detailed instructions on safety, operation, maintenance, troubleshooting, specifications, and warranty information.</p>
 <p>TRUPER INDUSTRIAL Instrucciones de Destornillador para panel de yeso 540 W Modelo DETA-N ATENCION</p>	<p>TRUPER DETA-N Drywall Screwdriver Manual Technical Specs & Safety Guide</p> <p>Comprehensive user manual for the TRUPER INDUSTRIAL DETA-N Drywall Screwdriver (Model 16024). Includes technical specifications, power requirements, safety warnings, parts identification, operation instructions, maintenance, and warranty information.</p>
 <p>TRUPER INDUSTRIAL Instrucciones de Orbital sander 300 W 1/4 Modelo LIOR-1/4N2 CAUTION</p>	<p>TRUPER LIOR-1/4N2 Orbital Sander User Manual and Safety Guide</p> <p>Comprehensive user manual for the TRUPER LIOR-1/4N2 Orbital Sander, covering technical specifications, safety instructions, operation tips, maintenance, and warranty information.</p>
 <p>TRUPER Instrucciones de Aspiradora seco / mojado 45 L Modelo ASP-12 ATENCION</p>	<p>TRUPER ASP-12 12 Gallon Wet/Dry Vacuum Cleaner User Manual</p> <p>Comprehensive user manual for the TRUPER ASP-12 12-gallon wet/dry vacuum cleaner, covering specifications, safety instructions, operation, assembly, maintenance, troubleshooting, and warranty information.</p>
 <p>TRUPER Guía de Montaje y Mantenimiento de Cadena para Motosierra Truper®</p>	<p>Guía de Montaje y Mantenimiento de Cadena para Motosierra Truper®</p> <p>Instrucciones detalladas para el montaje, tensión, afilado y mantenimiento de la cadena de su motosierra Truper®. Aprenda a instalar, afilar y asegurar la correcta tensión para un uso seguro y eficiente de su equipo.</p>