

VQ 7100

VQ Hepburn Mk II Digital Radio User Manual

Model: Hepburn Mk II (Model 7100)

Brand: VQ

INTRODUCTION

Welcome to your VQ Hepburn Mk II Digital Radio. This versatile device combines vintage aesthetics with modern functionality, offering DAB, DAB+, FM radio, Bluetooth connectivity, and an alarm clock. This manual will guide you through its features and operation.

WHAT'S IN THE BOX

- Hepburn Mk II DAB/DAB+/FM Radio
- Mains adaptor
- Instruction manual (this document)

SETUP

Follow these steps for initial setup:

1. **Power Connection:** Connect the supplied mains adaptor to the DC IN port on the back of the radio and plug it into a wall socket.



Image: Rear view of the VQ Hepburn Mk II radio, highlighting the power input and other connectivity ports.

2. **Antenna:** Fully extend the telescopic antenna for optimal radio reception.

Full Range Speakers

Patented acoustic engineering for premium sound quality.

10 Watt Drivers

Dual custom mounted speaker drivers deliver room filling sound.



Ultra-Wide Cones

The ultra-wide shallow angled cone delivers balanced acoustics.

Image: Side view of the VQ Hepburn Mk II radio with its telescopic antenna fully extended for better signal reception.

3. **First Power On:** Press the **POWER** button to turn on the radio. It will automatically scan for available DAB/DAB+ stations.

OPERATING INSTRUCTIONS

DAB/DAB+ and FM Radio

The Hepburn Mk II supports both DAB/DAB+ digital radio and traditional FM radio.

Switching Modes

Press the **MODE** button to cycle between DAB, FM, and Bluetooth modes.

Station Scanning

- **DAB/DAB+:** The radio performs an automatic scan upon first use. To perform a manual scan, navigate to the DAB menu and select "Full Scan".

- **FM:** In FM mode, press and hold the **SCAN** button to automatically tune to the next available station.

Presets

The radio offers 60 preset stations (30 DAB/DAB+, 30 FM).

1. **Saving a Preset:** Tune to your desired station. Press and hold the **PRESET** button until "Preset Store" appears on the display. Use the **TUNING** knob to select a preset number (1-30) and press the **SELECT** button to confirm.
2. **Recalling a Preset:** Press the **PRESET** button briefly. Use the **TUNING** knob to select the desired preset number and press **SELECT**.



Image: Illustration highlighting the 60 available preset slots for storing your favorite radio stations.

Bluetooth Connectivity

Stream music wirelessly from your Bluetooth-enabled device.

1. **Enter Bluetooth Mode:** Press the **MODE** button until "Bluetooth" is displayed. The radio will enter pairing mode, indicated by a flashing Bluetooth icon.
2. **Pair Your Device:** On your smartphone or tablet, go to Bluetooth settings and select "VQ Hepburn Mk II" from the list of available devices.
3. **Connection Confirmation:** Once paired, the radio display will show "Connect success" and the Bluetooth icon will be solid. You can now play audio from your device through the radio.



Image: The VQ Hepburn Mk II radio's display showing a successful Bluetooth connection.



Image: A visual representation of connecting a smartphone to the VQ Hepburn Mk II via Bluetooth, illustrating compatibility with various music streaming platforms.

Alarm Clock

The Hepburn Mk II features dual alarm settings.

1. **Setting an Alarm:** Press the **ALARM** button. Use the **TUNING** knob to select Alarm 1 or Alarm 2 and press **SELECT**. Follow the on-screen prompts to set the time, source (DAB, FM, or Tone), and volume.
2. **Snooze:** When an alarm sounds, press any button (except **POWER**) to activate snooze.
3. **Sleep Timer:** Press the **SLEEP** button repeatedly to cycle through sleep timer options (e.g., 15, 30, 60 minutes) before the radio automatically turns off.



Image: Icons representing the Dual Alarm, Snooze, and Sleep Timer functionalities of the radio.

Auxiliary Input and USB Charging

The radio includes a 3.5mm AUX-in port and a USB charge port.

- **AUX-in:** Connect external audio devices (e.g., MP3 players) using a 3.5mm audio cable to the AUX-in port. Select AUX mode using the **MODE** button.
- **USB Charge Port:** Use the USB port to charge your smartphone or tablet. This port is for charging only and does not support data transfer.

Headphone Jack


Need to listen privately?
Connect any headphones
and listen without disturbing
anyone else.

3.5mm Aux-in

Don't have Bluetooth?
Instead connect your device
with an aux cable.

USB Charge Port

Short on plug sockets?
Charge your phone/tablet for
the radio in no time.

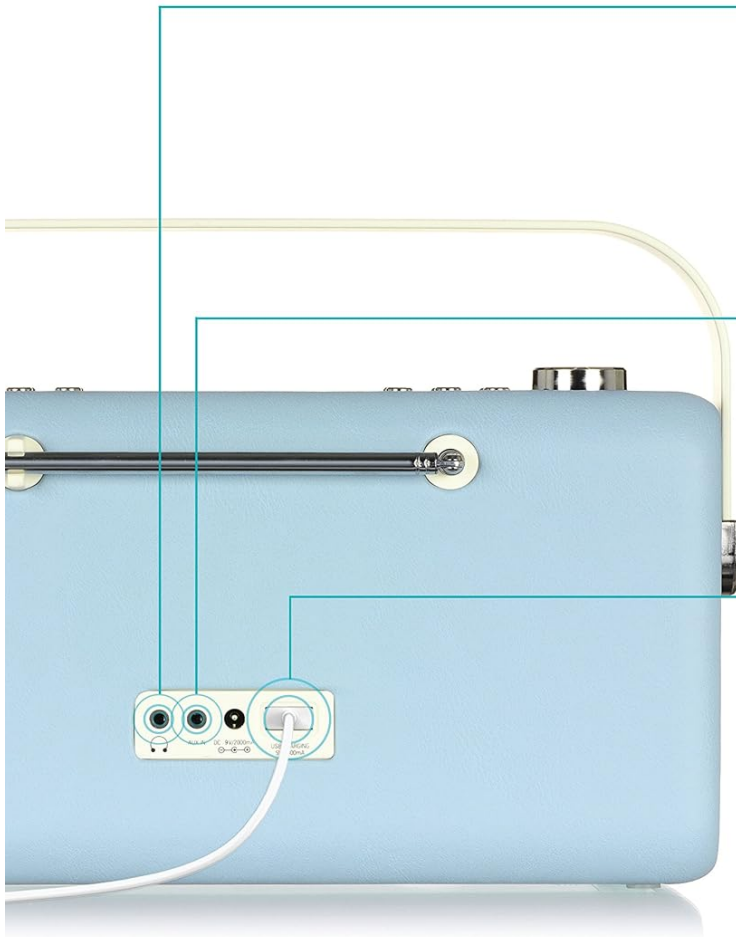

USB Charging



Image: A detailed diagram illustrating the headphone jack, 3.5mm Aux-in, and USB charge port on the VQ Hepburn Mk II, with a smartphone connected for charging.

KEY FEATURES

- **Premium Audio Quality:** Equipped with dual 10W full-range speakers and ultra-wide cones for balanced acoustics and deep bass.



Connect your phone/tablet
wireless and enjoy music from
these and any other service:-



Image: An internal diagram of the VQ Hepburn Mk II, highlighting its full-range speakers, 10-watt drivers, and ultra-wide cones designed for superior sound.

- **Digital Tick Standard:** Independently verified for quality, ensuring reception of all broadcast stations and future readiness.



This Product has it's quality independently verified by the Digital Tick standard, which means you will receive all the stations broadcast in your area and the product is future-ready, so you can buy with confidence.



Image: The "Digital Radio Tick Standard" certification mark, indicating the product's verified quality and future compatibility.

- **Portable Design:** Can be powered by mains or AA batteries (not included) for portability.



Image: The VQ Hepburn Mk II radio placed on a shelf in a bathroom, demonstrating its compact size and suitability for various environments.

MAINTENANCE

- **Cleaning:** Wipe the radio with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Antenna Care:** Handle the telescopic antenna carefully to prevent damage.
- **Battery Replacement (if applicable):** If using batteries, replace them when the low battery indicator appears. Ensure correct polarity.

TROUBLESHOOTING

Problem	Solution
No power	Check if the mains adaptor is securely connected to both the radio and the power outlet. Ensure the power outlet is active.

Problem	Solution
Poor radio reception	Fully extend the telescopic antenna. Try repositioning the radio to a location with better signal. Perform a full scan for DAB/DAB+ stations.
Bluetooth device won't pair	Ensure the radio is in Bluetooth mode and discoverable. Turn off and on Bluetooth on your device. Make sure no other device is currently connected to the radio.
No sound	Check the volume level on both the radio and your connected device (if using Bluetooth/AUX). Ensure the correct mode (DAB, FM, Bluetooth, AUX) is selected.

SPECIFICATIONS

Product Dimensions: 9.4L x 31.4W x 16.6H centimetres

Weight: 1.5 kg

Tuner Technology: DAB, FM, DAB+

Connectivity: Bluetooth, 3.5mm AUX-in, USB Charge Port

Power Source: Mains adaptor, Battery Powered (AA batteries not included)

Special Features: Dual alarm settings, Snooze, Sleep Timer, 60 Presets

Colour: Blue

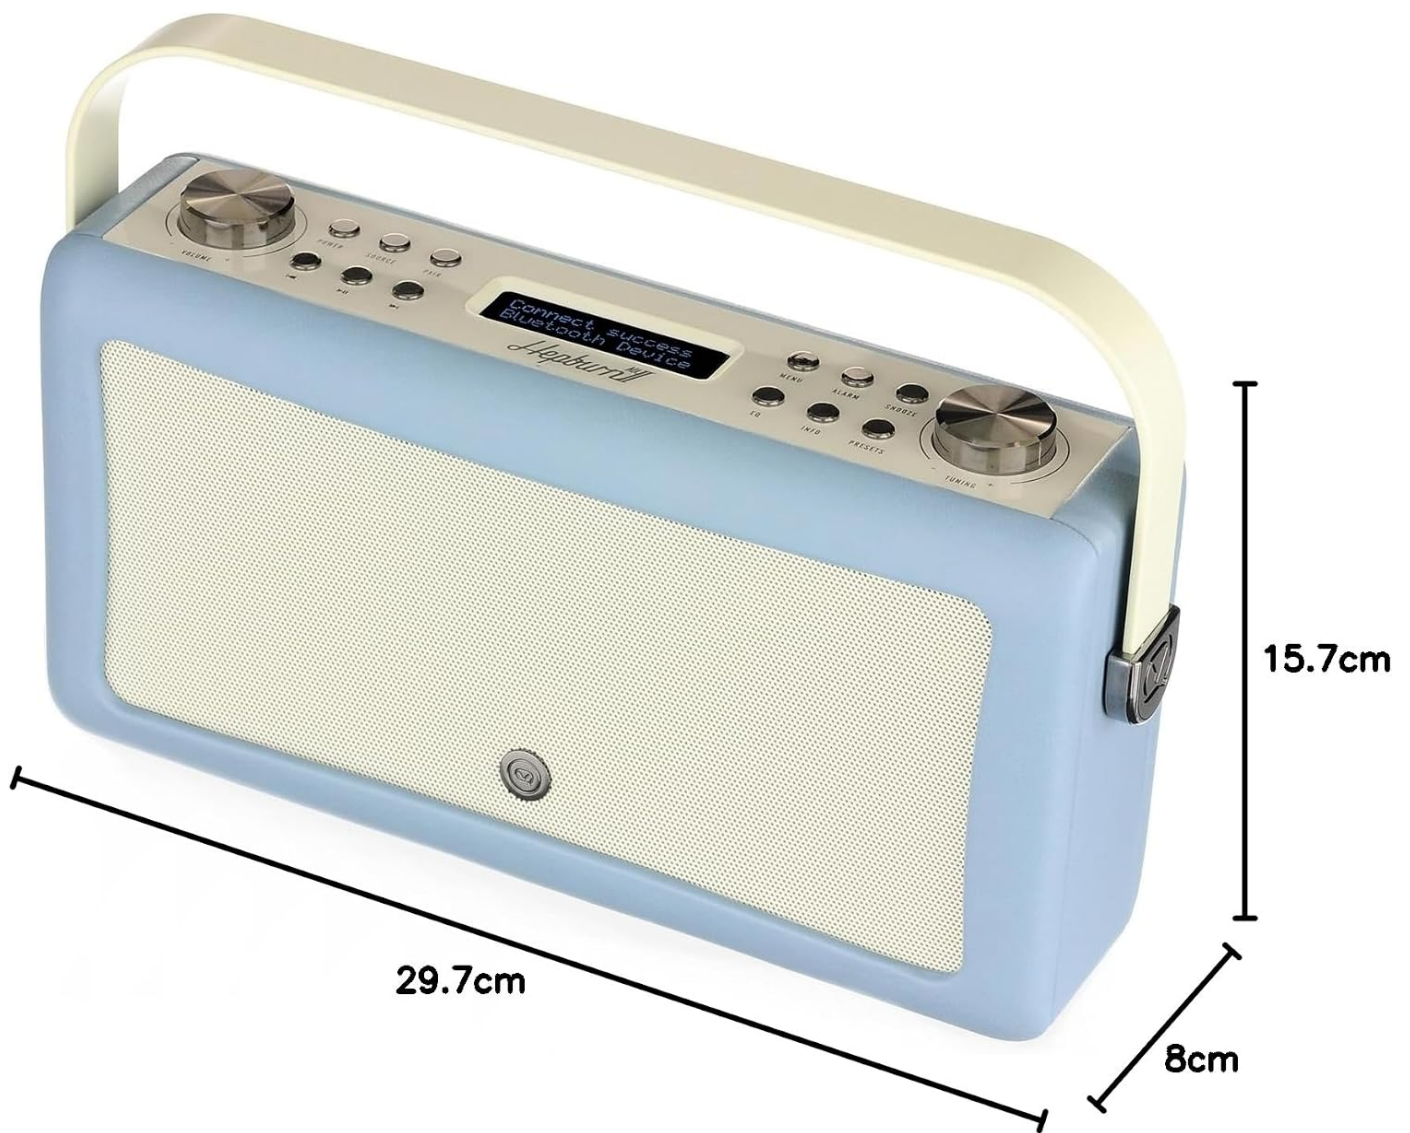


Image: Diagram illustrating the dimensions of the VQ Hepburn Mk II radio.

WARRANTY & SUPPORT

The VQ Hepburn Mk II is covered by a three-year warranty. For technical support or warranty claims, please visit the official VQ website or contact their customer service.

VQ Official Website: www.myvq.com



Handcrafted packaging enhances the premium feel of your Hepburn Mk II and makes it ideal for gifting.



Image: The product packaging for the VQ Hepburn Mk II, prominently displaying the 3-year warranty logo.

© 2024 VQ. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question