

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Sony](#) /

› [Sony SRSHG1 Hi-Res Wireless Speaker Instruction Manual](#)

## Sony SRSHG1

# Sony SRSHG1 Hi-Res Wireless Speaker Instruction Manual

Model: SRSHG1

## INTRODUCTION

---

Thank you for purchasing the Sony SRSHG1 Hi-Res Wireless Speaker. This manual provides essential information for setting up, operating, and maintaining your speaker to ensure optimal performance and longevity. Please read this manual thoroughly before using the product.

## SAFETY INFORMATION

---

Always observe the following safety precautions to prevent electric shock, fire, or injury:

- Do not expose the speaker to water or moisture.
- Do not disassemble or modify the unit. Refer servicing to qualified personnel only.
- Keep the speaker away from heat sources, direct sunlight, and extreme temperatures.
- Use only the specified power adapter for charging.
- Avoid placing heavy objects on the speaker.

## WHAT'S IN THE BOX

---

Verify that all items are present:

- Bluetooth Speaker (SRSHG1)
- AC Power Adapter
- USB Cable
- Instruction Manual (this document)

## PARTS AND CONTROLS

---

Familiarize yourself with the speaker's layout and controls.



Figure 1: Top panel controls including power, volume, Bluetooth, and EXTRA BASS buttons.



Figure 2: Side view highlighting the NFC touchpoint for quick pairing.

### Control Buttons:

- **Power Button:** Turns the speaker on or off.
- **Volume Buttons (+/-):** Adjusts the playback volume.
- **Bluetooth Button:** Initiates Bluetooth pairing mode.
- **EXTRA BASS Button:** Enhances bass output.
- **Function Button:** Switches between input modes (Bluetooth, Wi-Fi, Audio In, USB DAC).
- **Set-Up Button:** Used for Wi-Fi setup and network status.

### Ports:

- **DC IN:** For connecting the AC power adapter.
- **AUDIO IN:** For connecting external audio devices via a 3.5mm stereo mini-jack cable.
- **USB (Type-B):** For connecting to a computer for USB DAC functionality.

## SETUP

---

### 1. Charging the Speaker

Before initial use, fully charge the speaker. Connect the supplied AC power adapter to the DC IN port on the speaker and plug it into a wall outlet. The charge indicator will illuminate. A full charge provides approximately 12

hours of battery life.

## 2. Powering On/Off

Press and hold the **Power** button for a few seconds to turn the speaker on or off.

## 3. Bluetooth Pairing

1. Turn on the speaker.
2. Press the **Bluetooth** button to enter pairing mode. The Bluetooth indicator will flash.
3. On your smartphone or audio device, enable Bluetooth and search for available devices.
4. Select "SRSHG1" from the list. Once connected, the Bluetooth indicator will stop flashing and remain lit.
5. For NFC-compatible devices, simply touch your device to the NFC area on the speaker (Figure 2) to establish a connection.

## 4. Wi-Fi Connection (Using SongPal App)

For Wi-Fi connectivity and multi-room features, download the Sony | Music Center (formerly SongPal) app on your smartphone or tablet. Follow the in-app instructions to connect your SRSHG1 speaker to your Wi-Fi network. This enables Google Cast and other network features.

## 5. USB DAC Connection

Connect the speaker to your computer using the supplied USB cable. The speaker can function as a USB Digital-to-Analog Converter (DAC), bypassing your computer's sound card for high-quality audio playback. Ensure your computer's audio output is set to the SRSHG1.

# OPERATING THE SPEAKER

---

## Audio Playback

Once connected via Bluetooth, Wi-Fi, Audio In, or USB DAC, simply start playing audio from your source device. Use the volume buttons on the speaker or your device to adjust the sound level.

## Sound Modes

Press the **EXTRA BASS** button to activate or deactivate the bass enhancement feature, tailoring the sound to your preference.

## Multi-room and Stereo Pairing

The SRSHG1 supports multi-room audio and stereo pairing with other compatible Sony speakers via the Sony | Music Center app. Refer to the app's instructions for detailed setup of these advanced features.



Figure 3: The SRSBG1 speaker seamlessly integrates into various home environments.

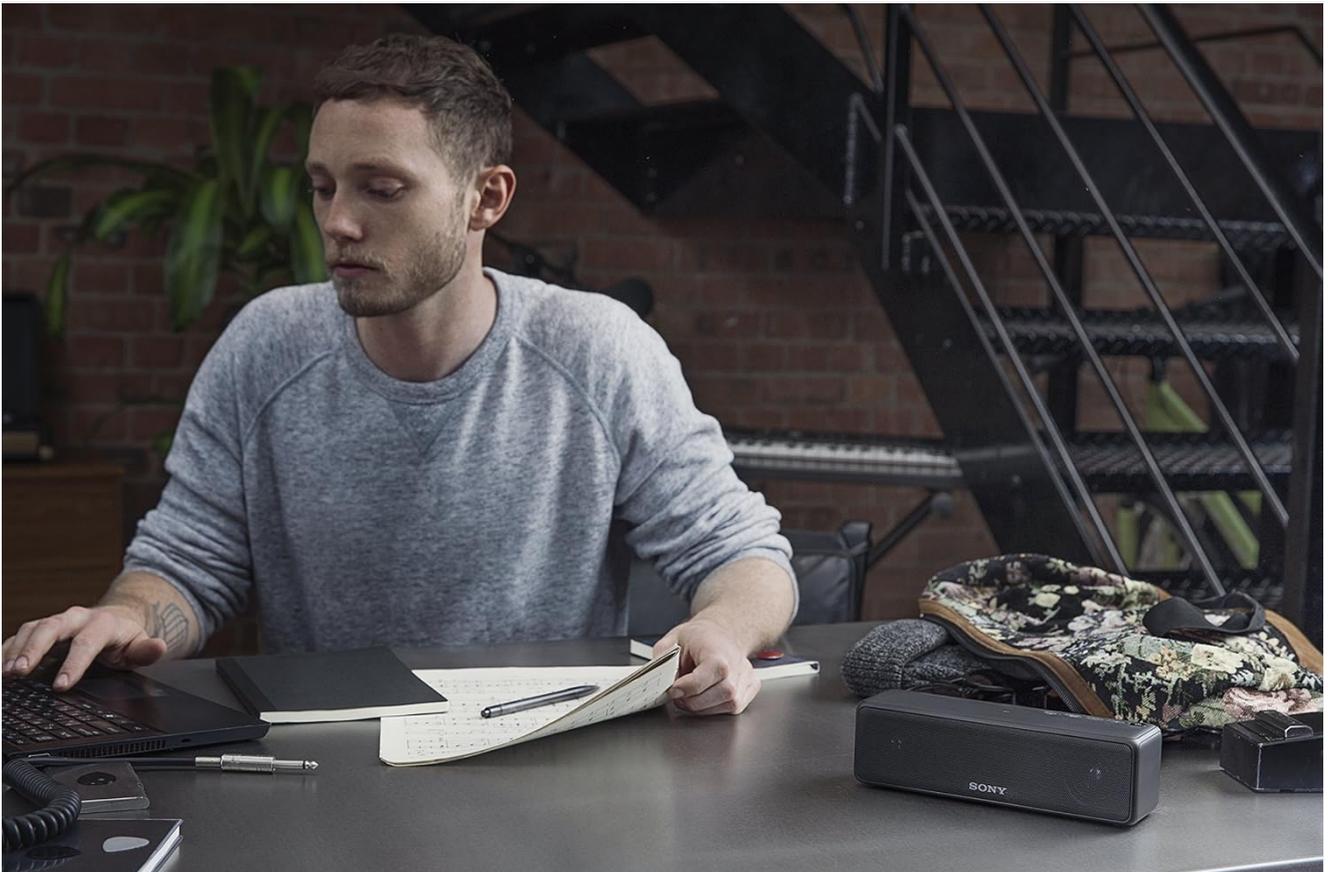


Figure 4: The compact design allows for easy placement in personal workspaces.

## MAINTENANCE

---

To maintain your speaker in good condition:

- Wipe the exterior with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Keep the speaker away from dust and lint.
- When not in use for extended periods, store the speaker in a cool, dry place.

## TROUBLESHOOTING

If you encounter issues with your SRSHG1 speaker, refer to the following common solutions:

- **No Power:** Ensure the speaker is charged or connected to AC power.
- **No Sound:** Check volume levels on both the speaker and the connected device. Verify the correct input source is selected using the Function button.
- **Bluetooth Connection Issues:** Ensure the speaker is in pairing mode and within range of your device (up to 10 meters). Try unpairing and re-pairing the device.
- **Wi-Fi Connection Issues:** Use the Sony | Music Center app to reconfigure Wi-Fi settings. Ensure your router is functioning correctly.
- **Status Lights:** The speaker uses various indicator lights (Charge, Network, Bluetooth, Link) to convey status. Consult the full online manual for a detailed explanation of light patterns and their meanings.

For persistent issues, contact Sony customer support.

## SPECIFICATIONS

Feature	Specification
Brand	Sony
Model Number	SRSHG1/BLK
Speaker Maximum Output Power	24 Watts
Connectivity Technology	Wireless (Bluetooth, Wi-Fi)
Audio Output Mode	Surround
Mounting Type	Freestanding
Additional Features	Lightweight, EXTRA BASS
Controller Type	Google Assistant (via app)
Color	Black
Battery Average Life	12 Hours
Is Waterproof	FALSE (Not Water Resistant)
Maximum Range	98 Feet (Bluetooth Range: 10 Meters)
Control Method	Voice (via app), Buttons
Speaker Size	35 Millimeters
Item Dimensions (D x W x H)	4.3"D x 5.6"W x 10.1"H
Item Weight	2.3 Pounds

Compatible Devices	Smartphone, Tablet, MP3 Player, Laptop
Power Source	AC
Number of Batteries	1 Lithium Ion (included)
Number of Audio Channels	2.1
Audio Driver Type	Dynamic Driver

## PRODUCT OVERVIEW VIDEO

---

Watch this official product video for a visual overview of the Sony SRSHG1 speaker's features and design.

Your browser does not support the video tag.

Video: Sony h.ear go product overview, showcasing its portability and various color options.

## WARRANTY AND SUPPORT

---

### Warranty Information

This Sony SRSHG1 speaker comes with a **1-year limited warranty** from the date of purchase. Please retain your proof of purchase for warranty claims. The warranty covers manufacturing defects but does not cover damage caused by misuse, accidents, or unauthorized modifications.

### Customer Support

For further assistance, technical support, or warranty service, please visit the official Sony support website or the [Sony Store on Amazon](#).