

[Manuals.plus](#) /

> [iPazzPort](#) /

> iPazzPort 2.4G Mini Wireless Keyboard with Touchpad Mouse Combo KP-810-19S User Manual

iPazzPort KP-810-19S

iPazzPort 2.4G Mini Wireless Keyboard with Touchpad Mouse Combo KP-810-19S User Manual

Model: KP-810-19S

1. INTRODUCTION

The iPazzPort 2.4G Mini Wireless Keyboard with Touchpad Mouse Combo (Model: KP-810-19S) is a compact and versatile input device designed for convenient control of various multimedia systems. It combines a full QWERTY keyboard with a sensitive touchpad, offering a seamless user experience for navigating, typing, and interacting with compatible devices from a distance of up to 30 feet.

This device is ideal for use with Android TV Boxes, Raspberry Pi, HTPC, XBMC, PCs, and laptops, eliminating the need for a full-sized keyboard and mouse setup. Please note that this device does not support Bluetooth connection and cannot be paired with Bluetooth-enabled phones or Samsung Smart TVs.

2. PACKAGE CONTENTS

- 1 x iPazzPort 2.4G Mini Wireless Keyboard with Touchpad
- 1 x USB Wireless Receiver
- 1 x USB Charging Cable (for models with rechargeable battery, though this model uses AAA batteries)
- 1 x User Manual

3. PRODUCT OVERVIEW

The iPazzPort KP-810-19S features a full QWERTY keyboard layout, a multi-touch touchpad, and dedicated function keys for media control and system commands.



Image 3.1: Overview of the keyboard layout, highlighting function keys, multimedia controls, and the touchpad.



Image 3.2: The ergonomic handheld design of the iPazzPort mini keyboard, shown being held for comfortable use.

4. SETUP

4.1. Battery Installation

The KP-810-19S requires two AAA batteries (not included). To install:

1. Remove the battery cover on the back of the keyboard.
2. Insert two AAA batteries, ensuring correct polarity (+/-).
3. Replace the battery cover.



Image 4.1: Detailed view of the battery compartment, illustrating where to insert two AAA batteries and the storage slot for the 2.4G USB dongle.

4.2. USB Receiver Connection

The USB receiver is stored inside the battery compartment. To connect:

1. Open the battery cover and carefully remove the USB dongle.
2. Plug the USB dongle into an available USB port on your target device (e.g., Android TV Box, PC).
3. The device is plug-and-play; no additional drivers are typically needed for most operating systems (Windows 7 may require a few minutes for driver installation).

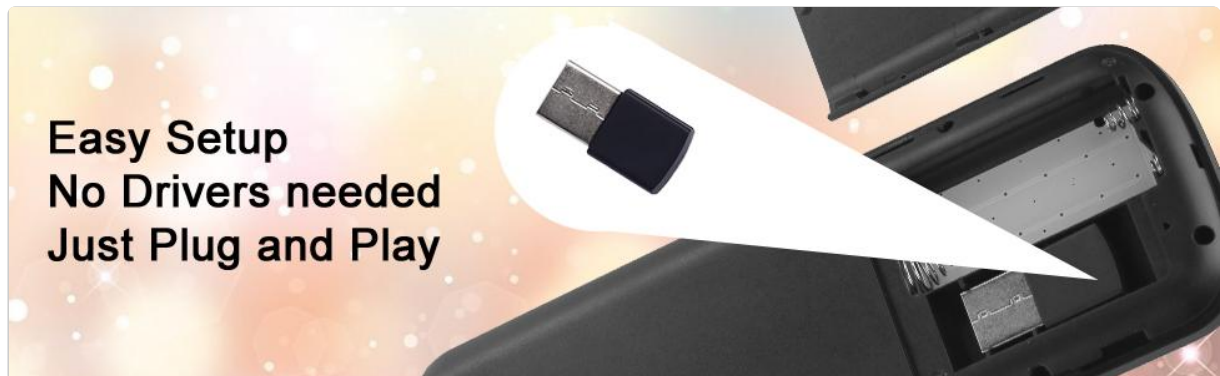


Image 4.2: Illustration of the easy setup process: removing the USB receiver from the keyboard and plugging it into a device.

4.3. Pairing (If Needed)

In most cases, the keyboard will automatically pair with the USB receiver upon connection. If pairing is lost or unsuccessful:

- Ensure the USB dongle is plugged into the computer/Android USB interface.
- Press and hold the **Fn** button and the **F1** button simultaneously. The LED indicator light on the keyboard will blink.
- Once the LED light stops blinking, pairing is successful.

Video 4.1: An unboxing video for the iPazzPort 2.4G wireless keyboard, demonstrating the contents and initial setup steps, including battery and dongle placement.

5. OPERATING INSTRUCTIONS

5.1. Powering On/Off

Locate the power switch on the side of the keyboard. Slide it to the 'On' position to activate the device. Slide it to 'Off' when not in use to conserve battery life.

5.2. Keyboard Functions

- **Typing:** Use the QWERTY layout for text input.
- **Function Keys (Blue Icons):** Press the **Fn** key (bottom left) simultaneously with the blue-labeled keys (F1-F12, media controls, etc.) to activate their secondary functions.
- **Ctrl+Alt+Del:** This combination can be activated by pressing **Fn + Enter**.

5.3. Touchpad Functions

The integrated touchpad supports various gestures:

- **Move Cursor:** Slide one finger across the touchpad.
- **Left Click:** Tap the touchpad with one finger, or use the dedicated left mouse button on the top left of the keyboard.
- **Right Click:** Tap the touchpad with two fingers simultaneously, or use the dedicated right mouse button on the top right of the keyboard.
- **Scrolling:** Slide two fingers vertically on the touchpad to scroll up or down.
- **Touchpad Sensitivity:** Adjust sensitivity by pressing **Fn + Space**. There are three levels: Fast, Medium, and Slow.

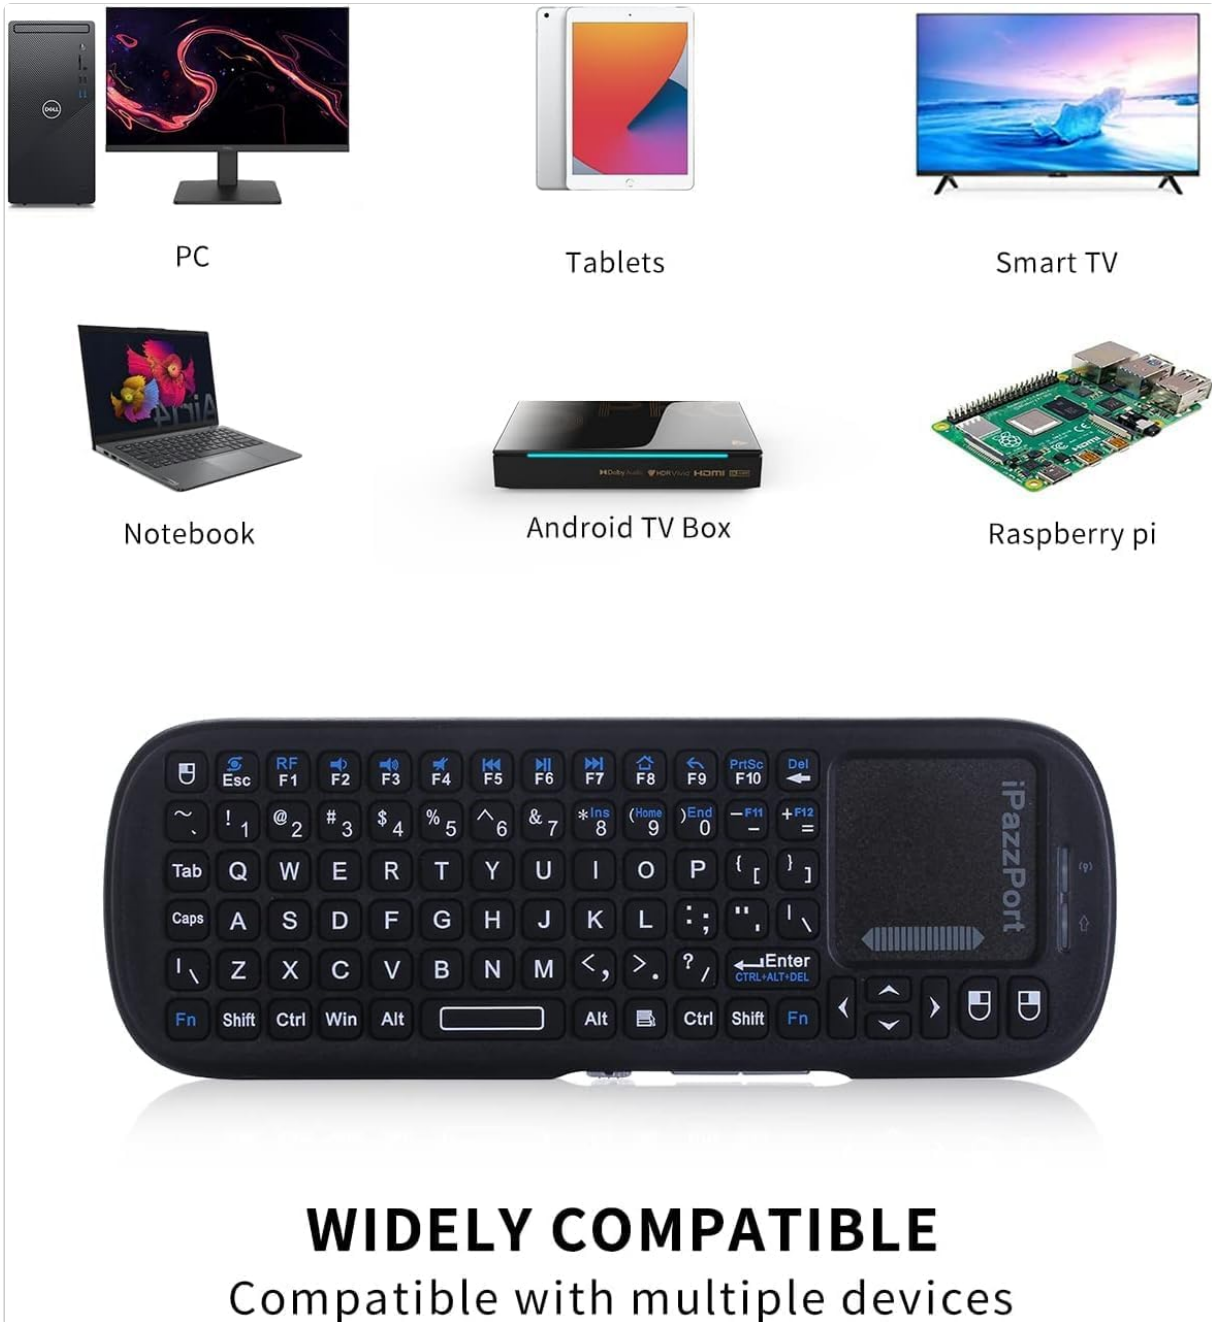


Image 5.1: The iPazzPort mini keyboard being used wirelessly with a desktop computer, showcasing its ergonomic design and effective operating distance.

6. COMPATIBILITY

The iPazzPort KP-810-19S is compatible with a wide range of devices:

- Android TV Box
- Raspberry Pi (3 and other models)
- HTPC (Home Theater PC)
- XBMC (Kodi) systems
- PC (Windows 7 and above)
- Laptops
- Tablets (with USB host support)
- PS4 (limited functionality, primarily for text input)

Incompatible Devices:

- Bluetooth-enabled phones (device uses 2.4G RF, not Bluetooth)

- Samsung Smart TVs
- Firestick/Fire TV (as per product specifications)

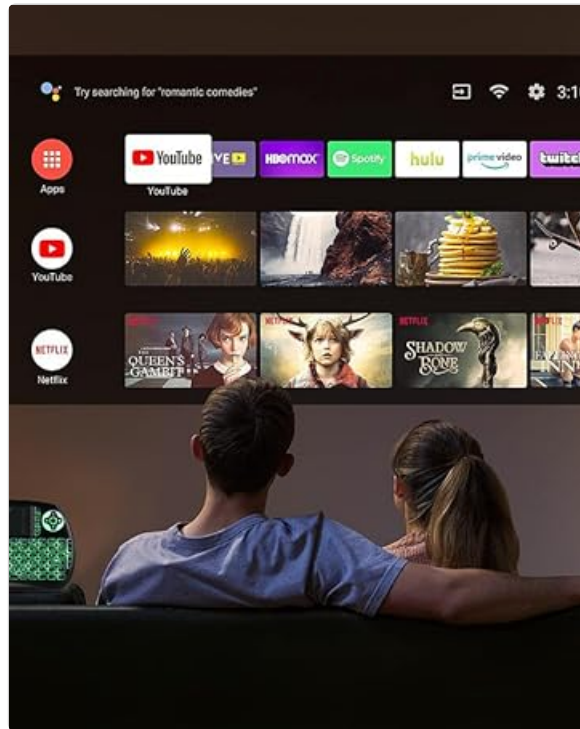


Image 6.1: Visual representation of the wide compatibility of the iPazzPort mini keyboard with devices such as PCs, tablets, smart TVs, notebooks, Android TV boxes, and Raspberry Pi.

7. MAINTENANCE

7.1. Battery Replacement

When the keyboard's performance degrades or the indicator light suggests low power, replace the AAA batteries as described in Section 4.1.

7.2. Cleaning

To clean the keyboard, use a soft, dry cloth. Avoid using liquid cleaners or abrasive materials, as these may damage the device. Ensure the device is powered off before cleaning.

8. TROUBLESHOOTING

- **No Response:** Ensure the keyboard is powered on and batteries are correctly installed and charged. Verify the USB receiver is securely plugged into the device. Try re-pairing the keyboard (Section 4.3).
- **Cursor Jumps or is Unresponsive:** Adjust the touchpad sensitivity (FN + Space). Ensure there are no obstructions on the touchpad surface.
- **Limited Range:** Ensure the keyboard is within the 30ft operating distance. Avoid physical obstructions between the keyboard and the USB receiver.
- **Typing Errors:** Check if the Caps Lock is accidentally activated. Ensure the correct language input is selected on your operating system.
- **Device Not Recognized:** For Windows 7, allow a few minutes for driver installation. For other devices, ensure compatibility (Section 6).

9. SPECIFICATIONS

Feature	Detail
---------	--------

Brand	iPazzPort
Model Number	KP-810-19S
Connectivity Technology	2.4G RF Wireless
Operating Range	Up to 30 feet (10 meters)
Keyboard Layout	QWERTY
Number of Keys	92
Touchpad	Ultra-sensitive multi-touch touchpad
Power Source	2 x AAA Batteries (DC 3V)
Dimensions (L x W x H)	4.72"L x 1.97"W x 0.71"H (120mm x 50mm x 18mm)
Weight	1.6 Ounces (45g)
Color	Black
Special Feature	Ergonomic design, Multimedia keys



Image 9.1: Detailed dimensions and weight of the iPazzPort mini keyboard.

10. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation included with your purchase or contact iPazzPort customer service directly. Keep your purchase receipt for any warranty claims.

