Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Britzgo BHA-702

Britzgo BHA-702 Hearing Amplifier User Manual

Model: BHA-702

Introduction

This manual provides detailed instructions for the proper use, setup, operation, and maintenance of your Britzgo BHA-702 Hearing Amplifier. Designed for adults with mild to moderate hearing loss, this Behind-The-Ear (BTE) device offers advanced digital sound amplification with noise cancellation and feedback suppression. Please read this manual thoroughly before using your device to ensure optimal performance and longevity.



Image: A man wearing the Britzgo BHA-702 hearing amplifier, demonstrating its discreet design.

Package Contents

Your Britzgo BHA-702 Hearing Amplifier package includes the following items:

- 1 x Britzgo BHA-702 Digital Hearing Amplifier
- 1 x Hard Protective Travel Case
- 2 x Long-life Zinc Air P13 Batteries
- 1 x Right Medium Ear Tube
- 1 x Left Medium Ear Tube

- 1 x 11mm Medium Dome (pre-installed)
- 1 x 13mm Large Spare Dome
- 1 x 9mm Small Spare Dome
- 1 x Cleaning Brush
- User Manual (this document)



Image: All components included in the Britzgo BHA-702 hearing amplifier kit.

Product Features

The Britzgo BHA-702 Hearing Amplifier is designed with user convenience and effective sound amplification in mind. Key features include:

- **Advanced Digital Sound Amplification:** Suitable for mild to moderate hearing loss.
- **Compact and Lightweight Design:** Neutral champagne color for discreet wear.
- **Two Hearing Modes/Frequency Control:** Adapts to different environments.
- **Noise Cancelling and Feedback Suppression:** Enhances clarity by reducing unwanted background noise and whistling.
- **Interchangeable Ear Tubes:** Designed for use in either the left or right ear.
- **Volume Control:** Easily adjustable to your comfort level.
- **Multiple Dome Sizes:** Small, Medium, and Large domes ensure a secure and comfortable fit.

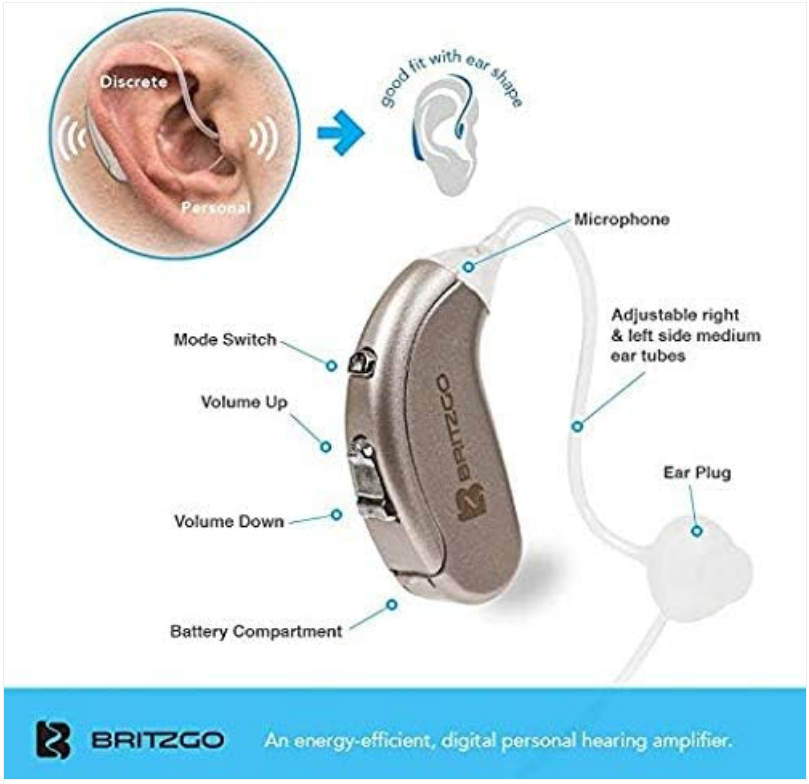


Image: Labeled diagram of the Britzgo BHA-702 amplifier highlighting its parts.

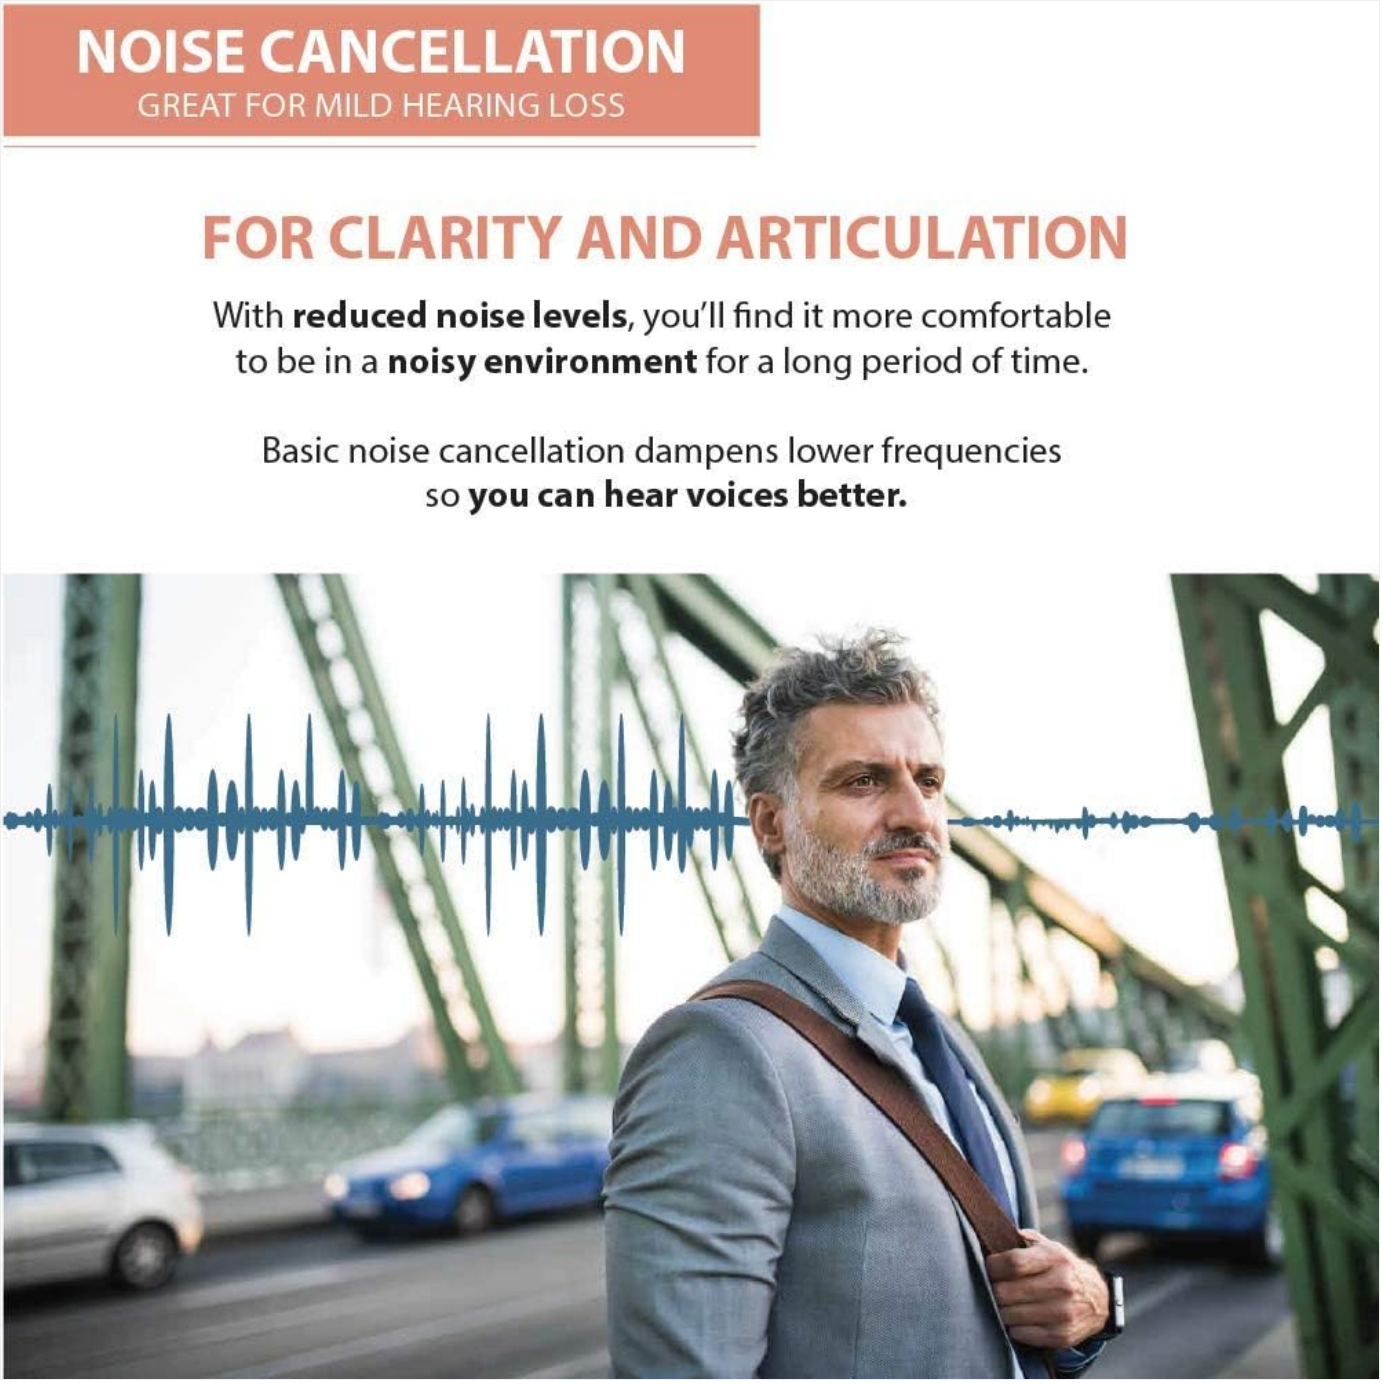


Image: Explanation of noise cancellation for improved clarity in conversations.

Setup Instructions

1. Battery Installation

1. Locate the battery compartment at the bottom of the amplifier.
2. Gently open the battery chamber.
3. Take one of the provided Zinc Air P13 batteries. Ensure the positive (+) side is facing up.
4. Carefully place the battery into the compartment.
5. Close the battery chamber securely. The device is now ready for use.

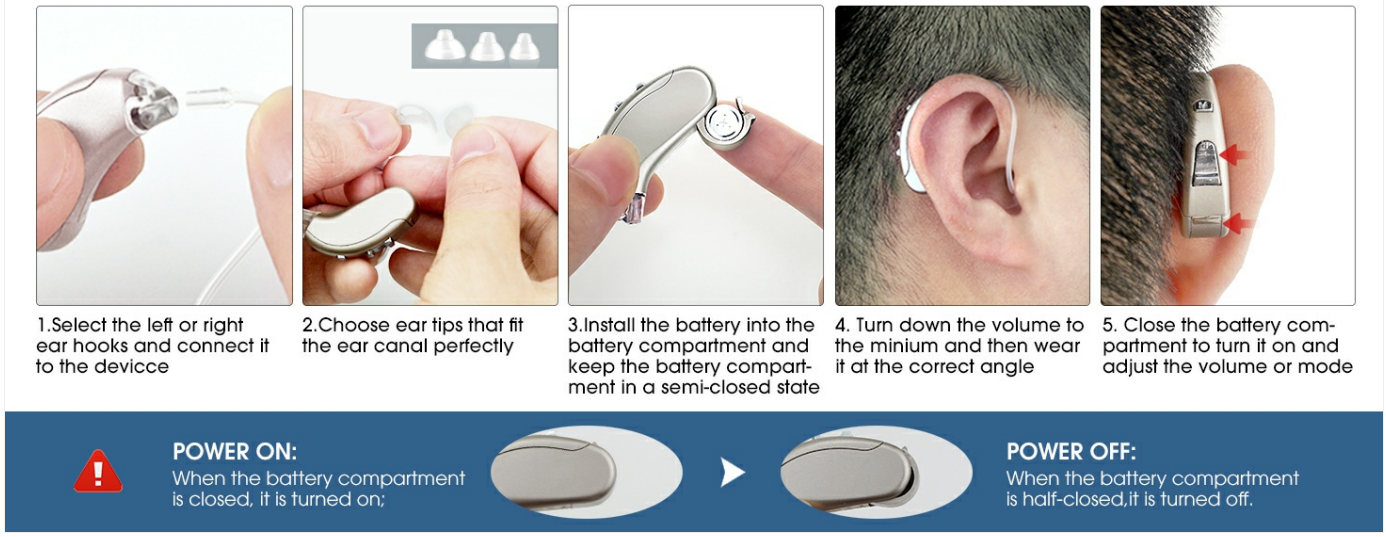


Image: Visual instructions for battery installation and wearing the device.

2. Selecting the Correct Ear Dome and Tube

The kit includes small, medium, and large ear domes, along with left and right ear tubes. Choose the dome size that provides a comfortable and secure seal in your ear canal. Select the appropriate ear tube for your left or right ear.

- Attach the chosen ear tube to the amplifier.
- Attach the selected ear dome to the end of the ear tube.

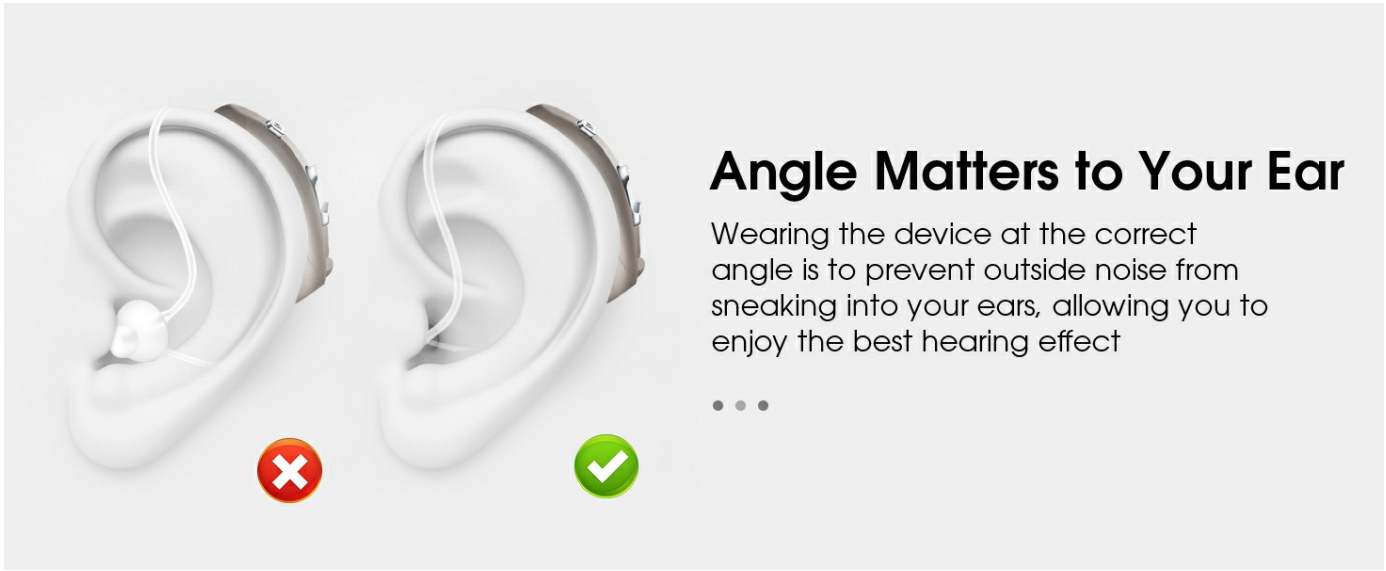


Image: Illustration of interchangeable ear tubes for left or right ear use.

Wearing the Amplifier

1. Place the body of the amplifier over and behind your ear.
2. Insert the ear dome firmly into your ear canal. Ensure a snug fit to prevent feedback.
3. If the small tail area of the ear tube is bothering you, gently tuck it into the folds of your ear.



Image: Correct wearing angle for the hearing amplifier to prevent external noise interference.

Operating Instructions

1. Power On/Off

- To turn **ON** the amplifier, ensure the battery compartment is fully closed.
- To turn **OFF** the amplifier, partially open the battery compartment. This conserves battery life when not in use.

2. Adjusting Volume

The amplifier comes preset to the lowest volume. To adjust the volume:

- Press the **'+' button** on the side of the amplifier to increase the volume.
- Press the **'-' button** to decrease the volume.
- Adjust until the sound is comfortable and clear for your environment.

3. Changing Modes (Noise Cancellation)

The BHA-702 features two noise cancellation modes:

- Press the **'Mode' button** (marked 'M') to switch between modes.
- You will hear a corresponding beep for each mode selection.
- **Mode 1 - Sonority (1 beep):** Ideal for conversations in quieter settings, allowing some background noise.
- **Mode 2 - Soft (2 beeps):** Designed for noisier environments to soften background noise and improve conversation clarity.
- If you accidentally skip a mode, simply press the 'Mode' button again to cycle through.

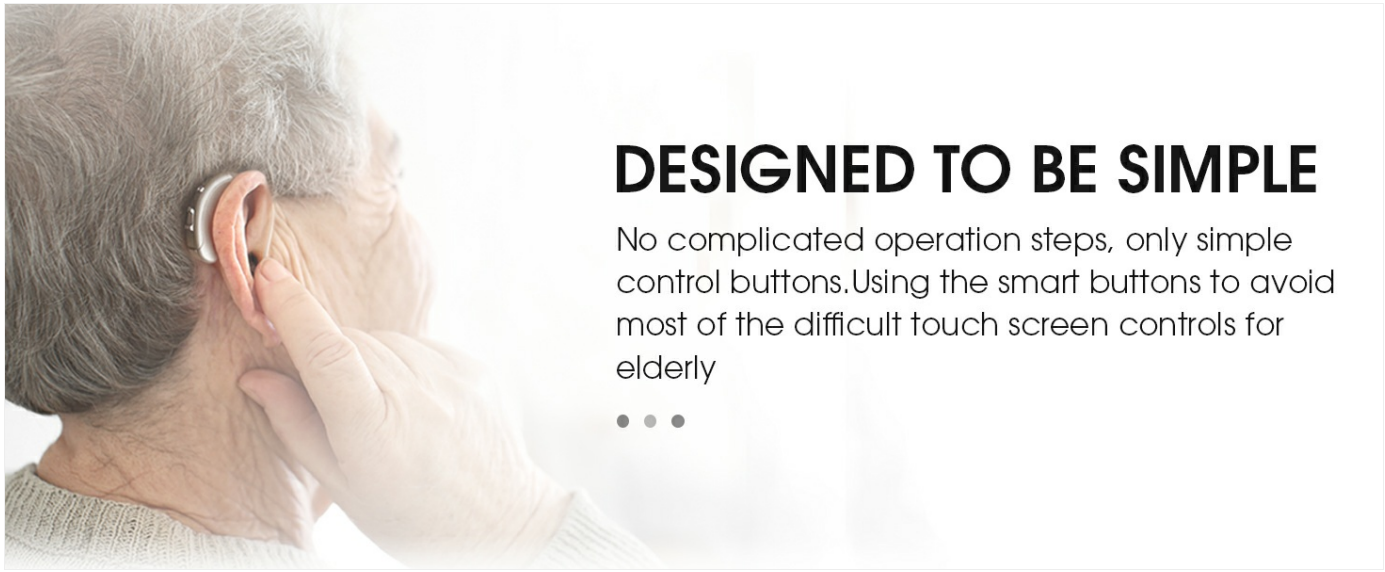


Image: The mode selection button for adapting to your environment.

Official Product Video: Britzgo BHA-702 "Cano" Overview

Your browser does not support the video tag.

Video: A comprehensive overview and setup guide for the Britzgo BHA-702 "Cano" Hearing Amplifier, demonstrating battery installation, wearing, and mode adjustments.

Troubleshooting

If you encounter any issues with your Britzgo BHA-702, please refer to the following common problems and solutions:

- **Whistling Sound (Feedback):**
  - This indicates the hearing amplifier is active.
  - Ensure the ear dome is securely sealed within your ear canal. Adjust its position if necessary.
  - Lower the volume slightly.
- **Noise Problem (Excessive Background Noise):**
  - Ensure the earplug fits closely to the ear canal.
  - Try using the device in a quiet environment first to get accustomed to it.
  - Switch to "Soft" mode (Mode 2) for noisier environments to reduce background noise.
- **Not Working:**
  - Verify that a fresh battery is correctly installed and the battery compartment is fully closed.
  - Clean any earwax that might be blocking the earplugs or microphone.
  - Adjust the volume and mode settings to ensure they are appropriate for your hearing needs.



Image: Common troubleshooting tips for the hearing amplifier.

Maintenance

Regular maintenance ensures the longevity and optimal performance of your hearing amplifier:

- **Cleaning:** Use the provided cleaning brush to regularly remove earwax and debris from the ear dome and ear tube. Gently wipe the main unit with a soft, dry cloth.
- **Storage:** When not in use, store the amplifier in its hard protective travel case in a cool, dry place. Partially open the battery compartment to turn off the device and conserve battery life.
- **Battery Replacement:** Replace batteries as needed. Always use Zinc Air P13 batteries.

Specifications

Model Name:	702
Item Model Number:	BHA-702
Brand:	Britzgo
Manufacturer:	Britzgo (USA) Ltd
Product Dimensions:	3 x 1 x 5 inches; 3.21 ounces
Color:	Silver
Material:	Plastic or Metal
Power Source:	Battery Powered
ASIN:	B01M6V8TXV

Important Safety Information & Legal Disclaimer

Please read and understand the following information before using your Britzgo BHA-702 Hearing Amplifier:

- This device is a Personal Sound Amplification Product (PSAP) and is intended to amplify sounds for recreational purposes. It is not a medical device and is not intended to diagnose, treat, cure, or prevent any disease or health condition, including hearing loss.
- Consult a medical professional if you suspect you have hearing loss or experience any discomfort or adverse reactions while using the device.
- Keep out of reach of children. Small parts may pose a choking hazard.
- Do not expose the device to extreme temperatures, moisture, or direct sunlight.
- Statements regarding dietary supplements have not been evaluated by the FDA and are not intended to diagnose, treat, cure, or prevent any disease or health condition.

Support & Contact Information

For further assistance, questions, or support regarding your Britzgo BHA-702 Hearing Amplifier, please contact our customer service team:

- **Email:** Britzgo2023@outlook.com
- Local customer service is available to support you by phone, email, or live chat.
- You can also visit the official Britzgo store for more information and accessories:Britzgo Store on Amazon

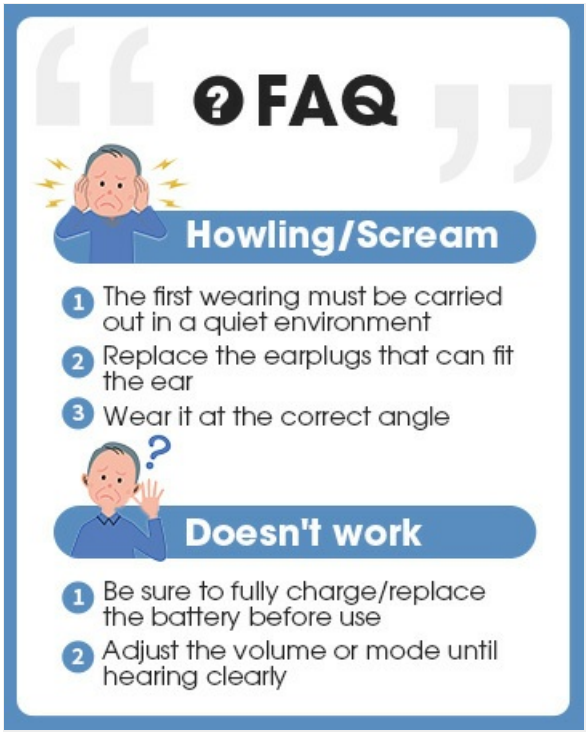


Image: Britzgo customer service contact details.

© 2026 Britzgo (USA) Ltd. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B01M6V8TXV

More documents and user manuals: **https://manuals.plus/**