

[Manuals.plus](#) /

› [Maclean](#) /

› Maclean MC-714 Dual Monitor Desk Mount Instruction Manual

Maclean MC-714

Maclean MC-714 Dual Monitor Desk Mount Instruction Manual

Model: MC-714

1. INTRODUCTION

Thank you for choosing the Maclean MC-714 Dual Monitor Desk Mount. This manual provides comprehensive instructions for the safe and efficient assembly, operation, and maintenance of your new monitor mount. Please read this manual thoroughly before installation and retain it for future reference.

The Maclean MC-714 is designed to securely hold two monitors ranging from 13 to 27 inches, with VESA mounting patterns of 75x75mm or 100x100mm. It offers full articulation, including tilt, swivel, and rotation, allowing for optimal viewing angles and an organized workspace.



Image 1.1: The Maclean MC-714 Dual Monitor Desk Mount, fully assembled and ready for use. This image displays the two articulating arms extending from a central pole, attached to a desk clamp.

2. SAFETY INFORMATION

- **Weight Capacity:** Do not exceed the maximum load capacity of 8 kg (17.6 lbs) per arm. Overloading can cause instability and potential damage.
- **VESA Compatibility:** Ensure your monitors have VESA mounting patterns of 75x75mm or 100x100mm.
- **Desk Thickness:** Verify your desk thickness is compatible with the clamp mechanism.
- **Assembly:** Assemble the product exactly as instructed. Improper assembly may result in damage or injury.
- **Children:** Keep small parts away from children.
- **Tools:** Use appropriate tools for assembly.
- **Maintenance:** Periodically check all screws and connections to ensure they are secure.

3. PACKAGE CONTENTS

Please verify that all components are present and undamaged before beginning assembly. If any parts are missing or damaged, contact customer support.



Image 3.1: All major components of the Maclean MC-714 Dual Monitor Desk Mount, including the central pole, articulating arms, VESA plates, and desk clamp parts.



Image 3.2: Included hardware and tools for assembly, typically consisting of various screws (M-A, M-B, M-C), washers, and Allen wrenches.

- Central Pole with Desk Clamp Base
- Desk Clamp Plate and Knob
- Two Articulating Monitor Arms
- Two VESA Mounting Plates
- Cable Management Clips
- Hardware Kit (screws, washers, Allen wrenches)

4. SETUP AND INSTALLATION

4.1. Desk Clamp Installation

1. Place the central pole assembly onto the desired position on your desk.
2. Attach the desk clamp plate to the bottom of the desk, aligning it with the pole.
3. Tighten the clamp knob until the mount is securely fastened to the desk. Ensure it is stable and does not wobble.



Image 4.1: The desk clamp securely attached to a desk, supporting the central pole and monitor arms. This illustrates the clamp mechanism from a front-facing perspective.

4.2. Monitor Arm Assembly

1. Slide the articulating arms onto the central pole at your desired height. Use the provided Allen wrench to tighten the height adjustment screw.
2. Attach the VESA mounting plates to the ends of the articulating arms.

4.3. Monitor Attachment

1. Carefully attach your monitors to the VESA mounting plates using the appropriate screws (M-A, M-B, or M-C) from the hardware kit. Ensure the screws are tightened securely but do not overtighten.
2. Confirm that the VESA pattern on your monitor matches either 75x75mm or 100x100mm.

4.4. Cable Management

Utilize the integrated cable management clips along the arms and central pole to route and organize your monitor cables. This helps maintain a tidy workspace and prevents cable damage.

5. OPERATING AND ADJUSTMENTS

The Maclean MC-714 offers extensive adjustability to achieve your preferred viewing experience.

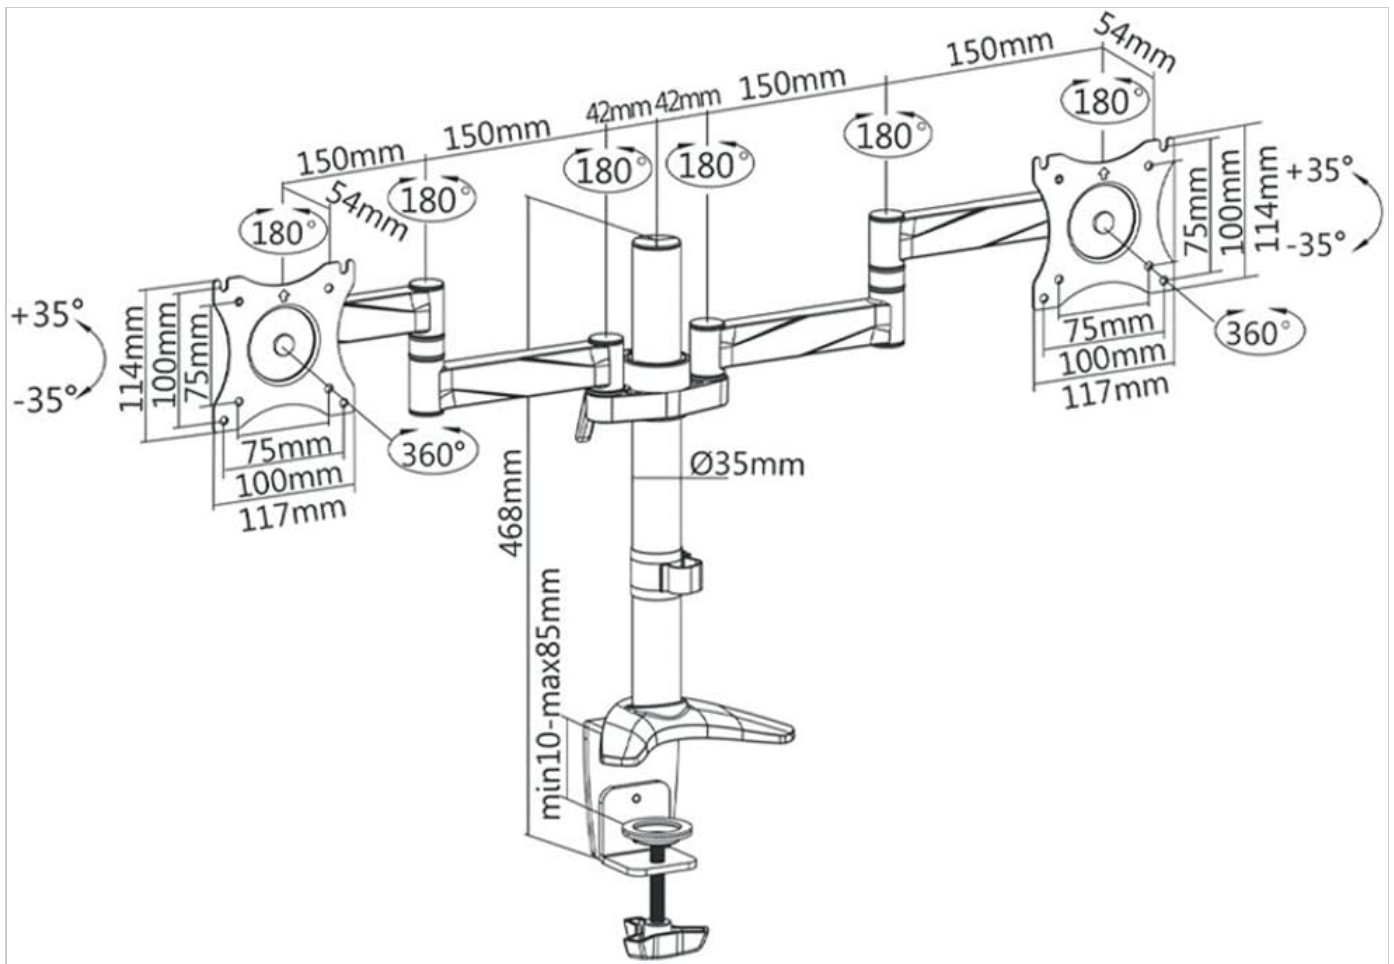


Image 5.1: Technical drawing illustrating the dimensions and range of motion for the Maclean MC-714, including tilt (+/- 35°), swivel (360°), and rotation (360°).

- **Height Adjustment:** Loosen the screw on the central pole to slide the arms up or down, then re-tighten to secure.
- **Tilt Adjustment:** The monitor can be tilted +/- 35 degrees vertically. Adjust the tilt angle by gently pushing or pulling the top or bottom of the monitor.
- **Swivel Adjustment:** The arms can swivel 360 degrees horizontally at various pivot points.
- **Rotation Adjustment:** The VESA plate allows for 360-degree rotation, enabling landscape or portrait monitor orientation.

Adjust the tension of the joints using the provided Allen wrenches if the monitors are too loose or too stiff.



Image 5.2: Two monitors mounted on the Maclean MC-714, showcasing a typical setup in an office environment. This image highlights the

6. MAINTENANCE

- **Cleaning:** Clean the mount with a soft, damp cloth. Avoid abrasive cleaners or solvents.
- **Tightening:** Periodically check all screws and bolts, especially those connecting the arms to the pole and the monitors to the VESA plates, to ensure they remain tight and secure.
- **Lubrication:** No lubrication is typically required for the moving parts.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Monitor sags or does not hold position.	Joints are too loose; monitor weight exceeds capacity.	Tighten the tension screws on the articulating joints. Ensure monitor weight is within the 8 kg per arm limit.
Mount feels unstable on the desk.	Desk clamp is not tightened sufficiently; desk surface is uneven.	Re-tighten the desk clamp knob. Ensure the desk surface is flat and sturdy.
Monitors are not level.	VESA plate or arm attachment is slightly off.	Adjust the VESA plate rotation or re-level the arms on the central pole.

8. SPECIFICATIONS

- **Model:** MC-714
- **Brand:** Maclean
- **Screen Size Compatibility:** 13" - 27"
- **VESA Compatibility:** 75x75mm, 100x100mm
- **Maximum Load Capacity:** 8 kg (17.6 lbs) per arm
- **Tilt Range:** +/- 35 degrees
- **Swivel Range:** 360 degrees
- **Rotation Range:** 360 degrees
- **Mounting Type:** Desk Clamp
- **Material:** Aluminum
- **Color:** Black
- **Product Dimensions:** 5.12 x 10.63 x 18.9 inches (assembled, approximate)
- **Item Weight:** 10.34 pounds

9. WARRANTY AND SUPPORT

Maclean products are manufactured with quality and durability in mind. For information regarding warranty coverage, please refer to the warranty card included with your purchase or visit the official Maclean website. For technical support, missing parts, or any questions regarding your Maclean MC-714 Dual Monitor Desk Mount, please

contact Maclean customer service through their official channels.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question