Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- Weiser /
- Weiser Kevo Smart Lock Conversion Kit (Model 9GED15000-102) User Manual

Weiser 9GED15000-102

Weiser Kevo Smart Lock Conversion Kit (Model 9GED15000-102) User Manual

Upgrade Your Existing Deadbolt into a Smart Lock

Introduction Safety Information Package Contents Setup &
Installation Operation Maintenance Troubleshooting Specifications Warranty & Support

1. Introduction

This manual provides comprehensive instructions for the installation, operation, and maintenance of your Weiser Kevo Smart Lock Conversion Kit, model 9GED15000-102. This kit is designed to transform your existing deadbolt into a smart lock, allowing for convenient access control via a smartphone.

The Kevo Convert system retains your existing deadbolt's exterior hardware while upgrading the interior mechanism to enable smart functionality. Please read this manual thoroughly before installation and use to ensure proper function and safety.

2. IMPORTANT SAFETY INFORMATION

- · Read all instructions completely before installing and operating the Kevo Convert.
- Familiarize yourself with all warning and caution statements.
- Protect your user codes and eKeys. Restrict access to the interior assembly of your lock and regularly check your lock settings to ensure they have not been altered without your knowledge.
- Dispose of used batteries according to local laws and regulations.
- Do not attempt to disassemble or modify the product. Unauthorized modifications may affect product performance and void the warranty.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Kevo Convert Interior Assembly
- · Mounting Plate

- Mounting Screws
- Strike Plate
- Latch
- 4 AA Batteries
- Installation Guide (this manual)





Figure 1: The interior assembly of the Weiser Kevo Smart Lock Conversion Kit. This unit replaces the existing interior portion of your deadbolt, providing smart functionality while maintaining the exterior appearance of your current lock.

4. SETUP AND INSTALLATION

The Kevo Convert is designed for easy installation, replacing only the interior hardware of your existing deadbolt. The exterior portion of your lock remains unchanged.

4.1 Compatibility

Kevo Convert is compatible with standard deadbolts from various brands, including Weiser, Kwikset, Baldwin Prestige, Baldwin Reserve, Baldwin Estate, and Schlage. Ensure your existing deadbolt is a standard type before proceeding.

4.2 Installation Steps

- 1. Prepare Your Door: Ensure your existing deadbolt is properly aligned and functions smoothly.
- 2. **Remove Existing Interior Hardware:** Unscrew and remove the interior thumb-turn assembly of your current deadbolt. The exterior key cylinder should remain in place.
- 3. **Install New Latch and Strike Plate (if necessary):** If your existing latch and strike plate are not compatible or are worn, replace them with the ones provided in the kit.
- 4. **Attach Mounting Plate:** Secure the Kevo Convert mounting plate to the door using the provided screws, ensuring it is flush against the door surface.
- Connect Kevo Convert Assembly: Connect the Kevo Convert interior assembly to the mounting
 plate. Ensure the tailpiece from the exterior cylinder properly engages with the Kevo Convert
 mechanism.
- 6. **Insert Batteries:** Install the four AA batteries into the battery compartment of the Kevo Convert interior assembly.
- 7. **Perform Door Handing Process:** Follow the instructions in the Kevo app or the quick start guide to calibrate the lock to your door's handing (left-hand or right-hand). This step is crucial for proper operation.



Figure 2: This diagram illustrates the distinction between the interior and exterior components of a deadbolt. The Kevo Convert kit replaces only the "On the Inside" portion, allowing the "On the Outside" key cylinder to remain.

4.3 App Setup

- 1. **Download the Kevo App:** Search for "Kevo" in your smartphone's app store (compatible with iOS and Android devices as listed in product specifications).
- 2. Create an Account: Follow the in-app instructions to create a Kevo account.
- 3. **Pair Your Lock:** Use the app to pair your Kevo Convert with your smartphone via Bluetooth. Ensure your phone's Bluetooth is enabled.
- 4. **Calibrate:** The app will guide you through a calibration process to optimize the lock's performance with your specific door.

5. OPERATION

The Kevo Convert allows you to lock and unlock your door using your smartphone.

5.1 Unlocking/Locking with Your Smartphone

- Ensure your smartphone with the Kevo app is within Bluetooth range of the lock.
- Open the Kevo app. The app will display the current lock status.
- Tap the lock icon in the app to toggle between locked and unlocked states.

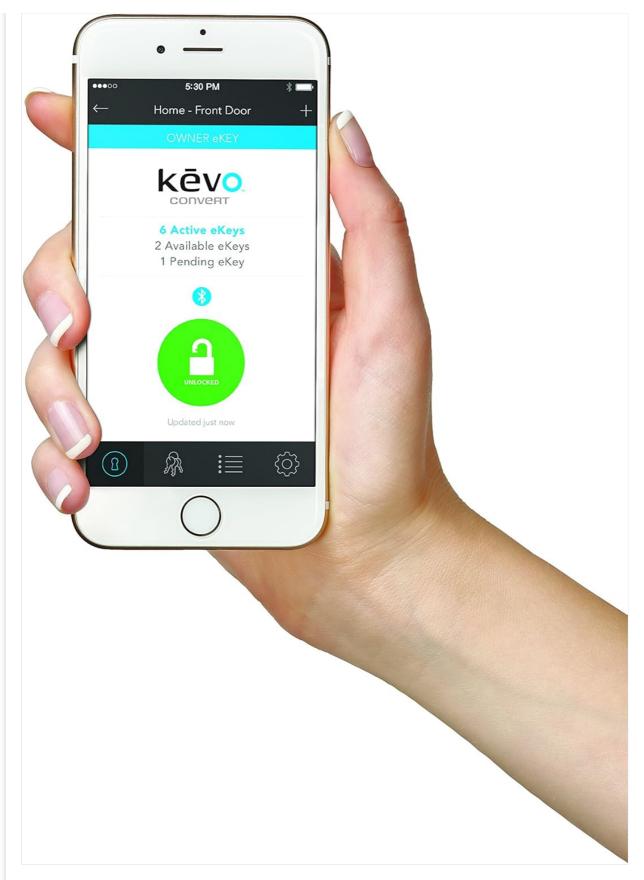


Figure 3: A smartphone screen showing the Kevo app interface. The large green padlock icon indicates the lock is currently in an unlocked state, ready for secure access.

5.2 Auto-Lock Feature

The Kevo Convert features an optional auto-lock function. When enabled, the lock will automatically engage 30 seconds after being unlocked, providing an added layer of security and peace of mind. This feature can be configured within the Kevo app settings.

5.3 Remote Access (Kevo Plus - Optional)

For remote locking and unlocking capabilities from anywhere, the Kevo Plus hub (sold separately) is required. This accessory connects your Kevo Convert to your home Wi-Fi network, allowing for control outside of Bluetooth range via the Kevo app.

5.4 Managing eKeys

The Kevo app allows you to send, revoke, and manage eKeys for family members, friends, or service providers. Each eKey can be assigned specific access schedules and permissions.

6. MAINTENANCE

6.1 Battery Replacement

The Kevo Convert operates on four AA batteries. When battery levels are low, the Kevo app will provide notifications, and the lock's LED indicator may flash. To replace batteries:

- 1. Remove the battery cover from the interior assembly.
- 2. Remove the old batteries and dispose of them responsibly.
- 3. Insert four new AA alkaline batteries, ensuring correct polarity.
- 4. Replace the battery cover.

It is recommended to use high-quality alkaline batteries for optimal performance and longevity.

6.2 Cleaning

Clean the Kevo Convert interior assembly with a soft, dry cloth. Avoid using abrasive cleaners, solvents, or chemical sprays, as these can damage the finish and electronic components.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Lock does not respond to app commands.	 Bluetooth is off on phone. Phone is out of range. Low batteries in Kevo Convert. App not running or crashed. 	 Ensure Bluetooth is enabled. Move closer to the lock. Replace batteries. Restart the Kevo app.
Lock does not calibrate correctly.	Improper installation.Door handing not set.	 Review installation steps, especially tailpiece engagement. Perform the door handing process again via the app.
Auto-lock feature not working.	Feature is disabled in app.	Enable auto-lock in the Kevo app settings.
Cannot connect to Kevo Plus (if applicable).	Kevo Plus not powered or connected to network.Interference.	 Ensure Kevo Plus is powered and has a stable internet connection. Relocate Kevo Plus closer to the lock or Wi-Fi router.

8. Specifications

• Model Number: 9GED15000-102

Manufacturer: Weiser
Color: Satin Nickel
Material: Metal

• **Product Dimensions:** 14.94 x 7.14 x 26.49 cm

• Item Weight: 971 g

• Power Source: 4 AA Alkaline Batteries (included)

• Special Features: Auto-Lock

• Connectivity: Bluetooth

• Compatible iOS Devices: Apple iPhone 4s, 5, 5s, 6, 6 Plus, 6s, 6s Plus, SE

• Compatible Android Devices: Nexus 5X, 6, 6P, 9, HTC One M9, Samsung Galaxy S5, S5 Active, S6, S6 Active, S6 Edge, S7 Active, S7 Edge, Note 4, Note 4 Edge, Google Pixel (Pixel, Pixel XL)

• Recommended Uses: Residential and office doors

9. WARRANTY AND SUPPORT

For detailed warranty information and customer support, please refer to the official Weiser website or contact Weiser customer service directly. Keep your proof of purchase for warranty claims.

Weiser Customer Support:

- Visit the official Weiser website for FAQs, troubleshooting guides, and contact information.
- Contact details are typically found in the "Support" or "Contact Us" section of the website.

© 2023 Weiser. All rights reserved. Information in this manual is subject to change without notice.

Related Documents - 9GED15000-102



Weiser Catalogue Complet de Quincaillerie de Porte et Serrures

Explorez le catalogue Weiser pour une vaste sélection de quincaillerie de porte, serrures électroniques et mécaniques, incluant les technologies SmartKey et Microban. Trouvez spécifications, finitions et prix.



Weiser Electronic Deadbolts Programming Guide

A simplified guide to programming various Weiser electronic deadbolts, including Powerbolt 2, SmartCode, Kevo, Aura, Halo, Premis, and Obsidian models. This guide covers factory reset, latch orientation, and user code programming.



Weiser Powerbolt 2 Keyless Entry Door Lock Installation and User Guide

Comprehensive guide for installing and using the Weiser Powerbolt 2 touchpad keyless entry door lock, including setup, programming, troubleshooting, and safety information.



Weiser GED240 Keypad Deadbolt Installation and User Guide

Comprehensive guide for installing and using the Weiser GED240 Keypad Deadbolt, including step-by-step instructions, programming, troubleshooting, and system alerts.



Weiser Powerbolt 2 Electronic Deadbolt: Installation and Usage Guide

Comprehensive guide for the Weiser Powerbolt 2 electronic deadbolt, covering door handing, adding user codes, and removing user codes. Features SmartKey technology.



Weiser Elements Installation and User Guide

Comprehensive installation and user guide for the Weiser Elements electronic door lock, detailing setup, operation, and troubleshooting.

Documents - Weiser - 9GED15000-102



[pdf]

TABLE DES MATIÈRES Weiser Pricebook August 1 2018 FR distmorissette 2019 09 |||
TABLE DES MATIRES RENSEIGNEMENTS GNRAUX MODALITS POUR
COMMANDER RENSEIGNEMENTS GNRAUX SMARTKEY Pag ... onibles 11P
Venetian bronze 15 Nickel satin Prix courant Quantit par caisse GED 1500
9GED15000-103 9GED15000-102 385 2 Pices SmartKey est standard sur tous
Classements de rsistance 12 les prod...

lang:fr score:17 filesize: 7.7 M page_count: 133 document date: 2018-07-06