

Motorola I.T 5.1X

Motorola I.T 5.1X Cordless Phone User Manual

Model: I.T 5.1X

INTRODUCTION

Thank you for purchasing the Motorola I.T 5.1X Cordless Phone. This manual provides essential information for setting up, operating, and maintaining your new phone. The Motorola I.T 5.1X features 2.4 GHz DECT 6.0 technology, a 100-name phonebook memory, call blocking technology, and a 'Do Not Disturb' one-touch key. It supports registration of up to 4 handsets to a single base unit.

PACKAGE CONTENTS

Before you begin, please ensure all items listed below are present in your package:

- 1 x Cordless Handset
- 1 x Base Unit
- 1 x Power Adapter
- 1 x Telephone Line Cord
- 2 x AAA Rechargeable Batteries
- 1 x User Manual (this document)





Image: The Motorola I.T 5.1X cordless handset placed in its base unit, showing the front display and keypad.

SETUP

1. Battery Installation

1. Locate the battery compartment cover on the back of the handset.
2. Slide the cover downwards to remove it.
3. Insert the two AAA rechargeable batteries, observing the correct polarity (+ and -).
4. Replace the battery compartment cover, sliding it upwards until it clicks into place.

2. Connecting the Base Unit

1. Plug the small end of the power adapter into the 'POWER' jack on the back of the base unit.
2. Plug the other end of the power adapter into a standard electrical wall outlet.
3. Plug one end of the telephone line cord into the 'LINE' jack on the back of the base unit.
4. Plug the other end of the telephone line cord into your telephone wall jack.



Image: The power adapter and telephone line cord included with the Motorola I.T 5.1X phone, used for connecting the base unit.

3. Charging the Handset

Place the handset on the base unit. The handset will begin charging. For optimal battery performance, allow the handset to charge for at least 16 hours before its first use.

4. Handset Registration (for additional handsets)

The primary handset is pre-registered. If you have purchased additional handsets (up to 4 can be registered), follow these steps:

1. On the base unit, press and hold the 'PAGE' button for approximately 5 seconds until the registration indicator light flashes.
2. On the new handset, press the 'MENU/OK' button, navigate to 'REGISTER HANDSET', and press 'MENU/OK' again.
3. Enter the system PIN (default is 0000) and press 'MENU/OK'.
4. Once registered, the handset will display its assigned number (e.g., 'HANDSET 2').

OPERATING THE PHONE

Basic Call Functions

- **Making a Call:** Press the **CALL** button, then dial the number. Alternatively, dial the number first, then press **CALL**.
- **Answering a Call:** When the phone rings, press the **CALL** button.
- **Ending a Call:** Press the **END** button or place the handset back on the base unit.
- **Adjusting Volume:** During a call, use the **UP/DOWN arrow keys** to adjust the earpiece or speaker volume.

Phonebook

The phonebook can store up to 100 names and numbers.

- **Adding a Contact:** Press 'MENU/OK', navigate to 'PHONEBOOK', then 'ADD NEW'. Enter the name and number, then save.
- **Calling from Phonebook:** Press the **DOWN arrow key** to access the phonebook, scroll to the desired contact, and press **CALL**.

Call Blocking

This feature allows you to block unwanted calls.

- **Activating Call Blocking:** Press 'MENU/OK', navigate to 'CALL BLOCK', then 'ON'. You can add specific numbers to a block list.
- **Blocking a Number During a Call:** Press the 'BLOCK' button (if available) or access the menu during a call to add the current caller to the block list.

'Do Not Disturb' Mode

Activate this mode to silence incoming calls for a set period.

- **Activating DND:** Press the dedicated 'Do Not Disturb' key (often represented by a crescent moon icon) or navigate through the menu to 'DND' and select 'ON'.
- **Deactivating DND:** Press the 'Do Not Disturb' key again or select 'OFF' from the menu.

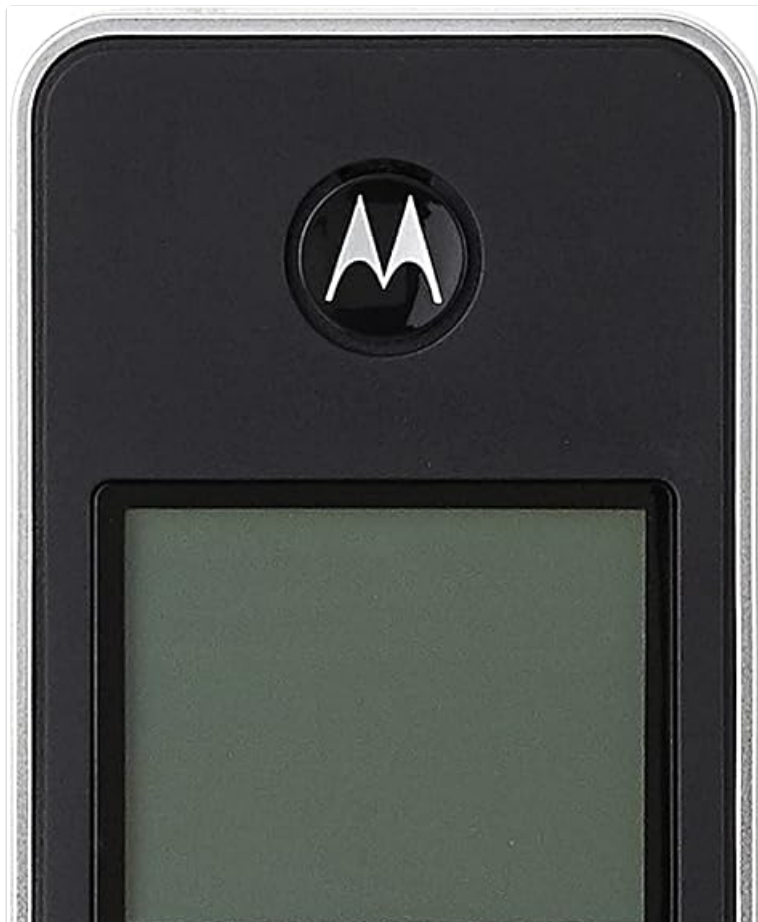




Image: A close-up view of the Motorola I.T 5.1X cordless handset, highlighting the display and keypad buttons for operation.

MAINTENANCE

- **Cleaning:** Wipe the phone and base unit with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Battery Care:** Use only the supplied rechargeable batteries. If the phone will not be used for an extended period, remove the batteries.
- **Environment:** Keep the phone away from heat sources, direct sunlight, and moisture.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No dial tone	Telephone line cord not connected or faulty.	Ensure the telephone line cord is securely plugged into both the base unit and the wall jack. Test with another phone if possible.
Handset not charging	Handset not correctly placed on base unit; dirty charging contacts; power adapter not connected.	Ensure the handset is properly seated. Clean charging contacts on both handset and base with a dry cloth. Check power adapter connection.
Cannot make/receive calls	Out of range; low battery; line fault.	Move closer to the base unit. Charge the handset. Check telephone line connection.
Poor sound quality	Interference; out of range.	Move the base unit away from other electrical appliances. Move closer to the base unit.

SPECIFICATIONS

Feature	Description
Brand	Motorola
Model Name	I.T 5.1X
Connectivity Technology	2.4 GHz DECT 6.0 technology
Colour	Black
Phonebook Memory	100 names and numbers
Display	Bright blue backlit display
Additional Features	Call blocking technology, Do Not Disturb one-touch key
Handset Registration	Up to 4 handsets per base
Material	Plastic
Item Weight	0.42 Kilograms



Image: The Motorola I.T 5.1X handset shown with its approximate dimensions (7.5 inches / 19 cm in height).

WARRANTY INFORMATION

The Motorola I.T 5.1X Cordless Phone comes with a **3-year manufacturer's warranty**. Please retain your proof of purchase for any warranty claims. This warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized repairs, or normal wear and tear.

SUPPORT

For further assistance, technical support, or to inquire about replacement parts, please refer to the official Motorola support website or contact their customer service department. Contact details can typically be found on the manufacturer's website or on the product packaging.

You may also find helpful resources and frequently asked questions (FAQs) online by searching for 'Motorola I.T 5.1X support'.

© 2023 Motorola. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question