

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Amazon Basics](#) /

› [Amazon Basics UPS Battery Backup & Surge Protector 600VA/360W, 8 Outlets, Standby Uninterruptible Power Supply, for Power Outage Protection, Compact, Black Standby 8 Outlet \(600VA\) - User Manual](#)

Amazon Basics Amazon Basics UPS - 600 VA

Amazon Basics UPS Battery Backup & Surge Protector 600VA/360W, 8 Outlets

Model: Amazon Basics UPS - 600 VA | Brand: Amazon Basics

INTRODUCTION


This user manual provides essential information for the safe and effective operation of your Amazon Basics UPS Battery Backup & Surge Protector. This device is designed to provide reliable power backup and surge protection for your electronic equipment, ensuring continuous operation during power fluctuations or outages and safeguarding against damaging power surges.


SAFETY INFORMATION

- **Initial Charging:** Before first use, plug the UPS into a standard wall outlet and allow it to charge for at least 8 hours to ensure optimal battery performance.
- **Positioning:** Do not lie or mount the UPS down on its side. Always keep the unit upright to ensure proper ventilation and long battery life.
- **Load Capacity:** For optimal system performance and to prevent overload, ensure the total power consumption of connected devices remains below 80% of the unit's rated capacity (600VA / 360W).
- **Proposition 65 Warning:** This product may expose you to chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

PRODUCT OVERVIEW

The Amazon Basics 600VA UPS features a compact design with 8 outlets, providing both surge protection and battery backup capabilities.

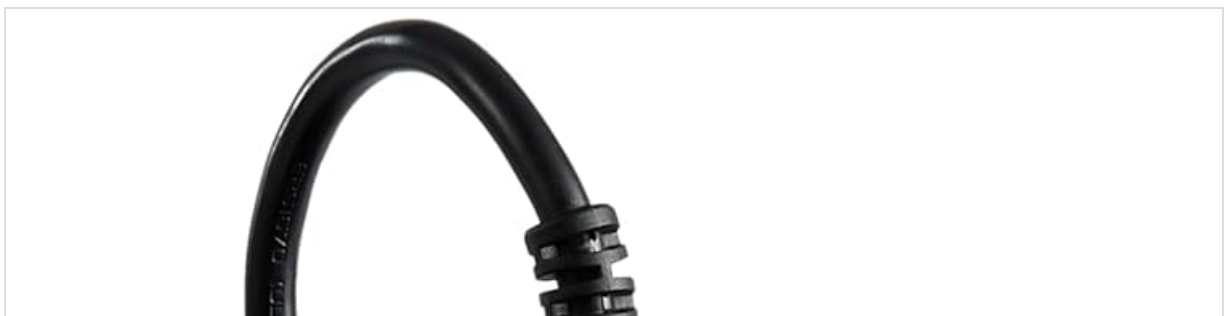

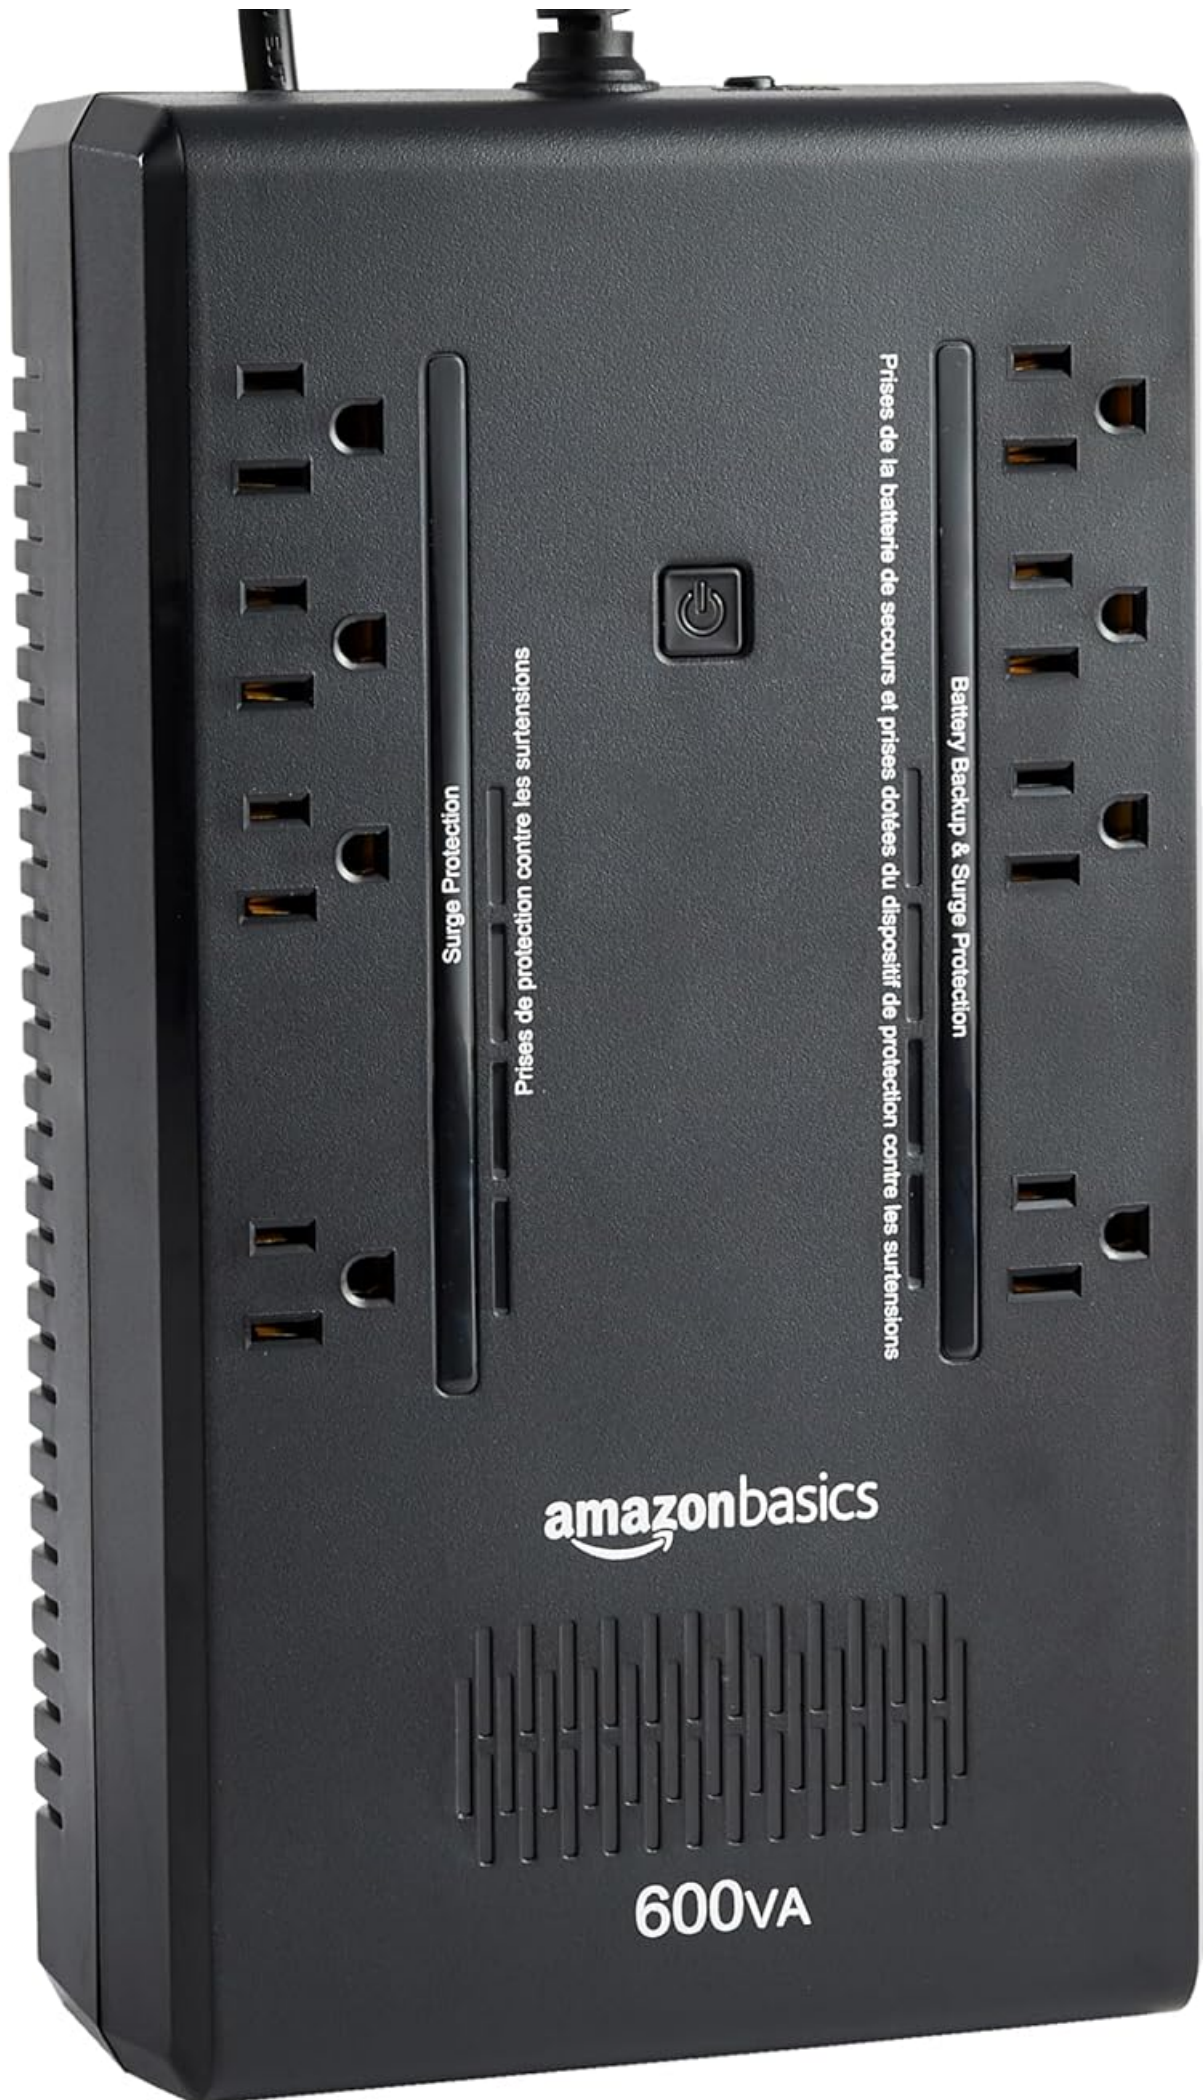

Surge Protection

Prises de protection contre les surtensions



Prises de la batterie de secours et prises dotées du dispositif de protection contre les surtensions

Battery Backup & Surge Protection

amazonbasics

600VA

This image shows the top view of the Amazon Basics 600VA UPS, highlighting its eight outlets. Four outlets offer surge protection, and four provide both surge protection and battery backup. The power button is centrally located.

amazon basics



8 outlets total (4 surge-protected outlets & 4 surge-protected / battery-backup outlets)



600VA / 360W battery backup saves data and shuts devices down safely when power goes out



5-foot cord with NEMA 5-15P right-angle and 45-degree offset plug

8 Outlets

A diagram illustrating the key features of the Amazon Basics 600VA UPS. It highlights the total of 8 outlets (4 surge-protected, 4 battery-backup/surge-protected), the 600VA/360W battery backup capacity, and the 5-foot cord with a NEMA 5-15P right-angle plug.


Find the Right Device

For best performance, keep the load below
80% of the unit's rated capacity




Total Capacity	400 VA / 255 W	600 VA / 360 W	800 VA / 450 W	1000 VA / 550 W	1500 VA / 900 W
Best For	Small compact size for easily integrating into home or office environment	Desktop computers, home networks, IoT devices, and home entertainment devices	Desktop computers, home networks, IoT devices, and home entertainment devices	Providing continuous power in the event of an outage, fluctuation, or surge	Providing continuous power in the event of an outage, fluctuation, or surge
Inputs	6	8	12	9	10
Type	Standby	Standby	Standby	Line Interactive	Line Interactive

This table provides a comparison of different Amazon Basics UPS models, including their total capacity (VA/W), recommended best use cases, number of inputs, and type (Standby or Line Interactive). This helps in selecting the right device for specific needs.

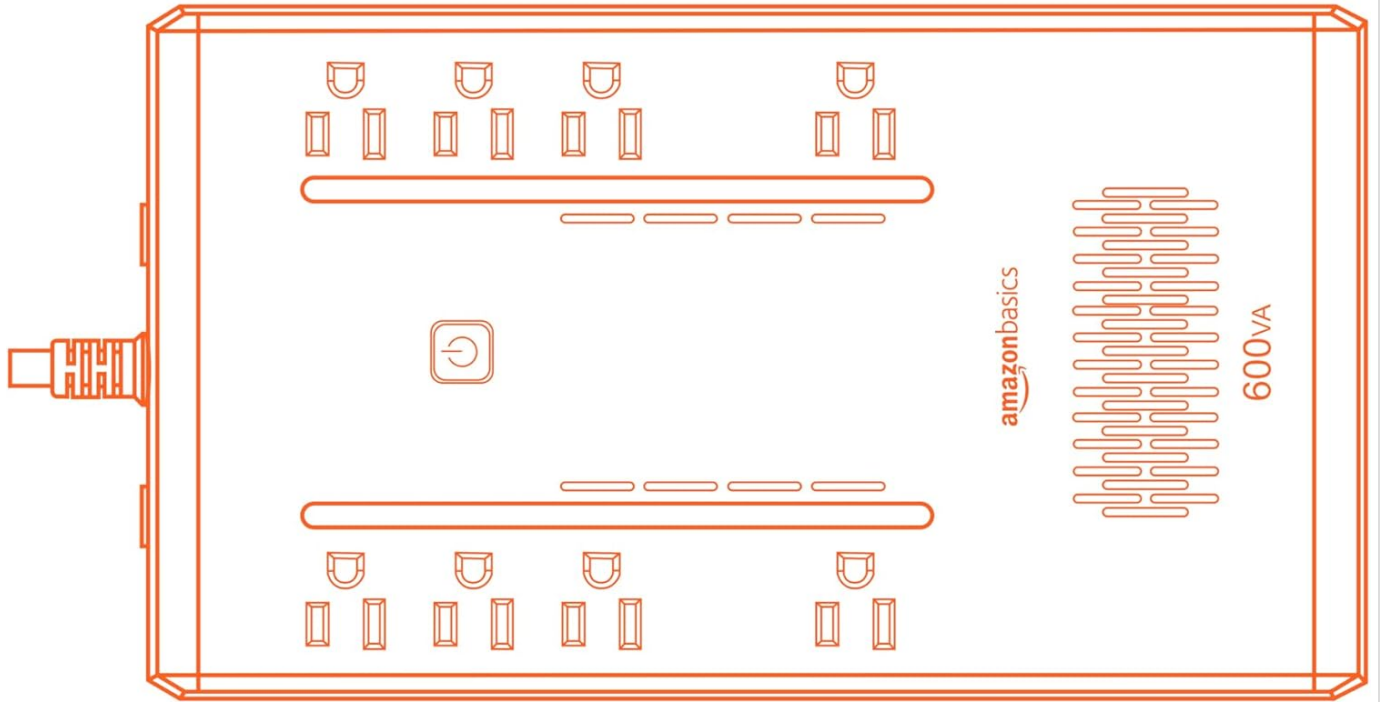

**Do not lie or mount the UPS down on its side
to ensure long battery life**

An important visual instruction indicating that the UPS should not be placed or mounted on its side. This is crucial for maintaining battery life and proper operation.

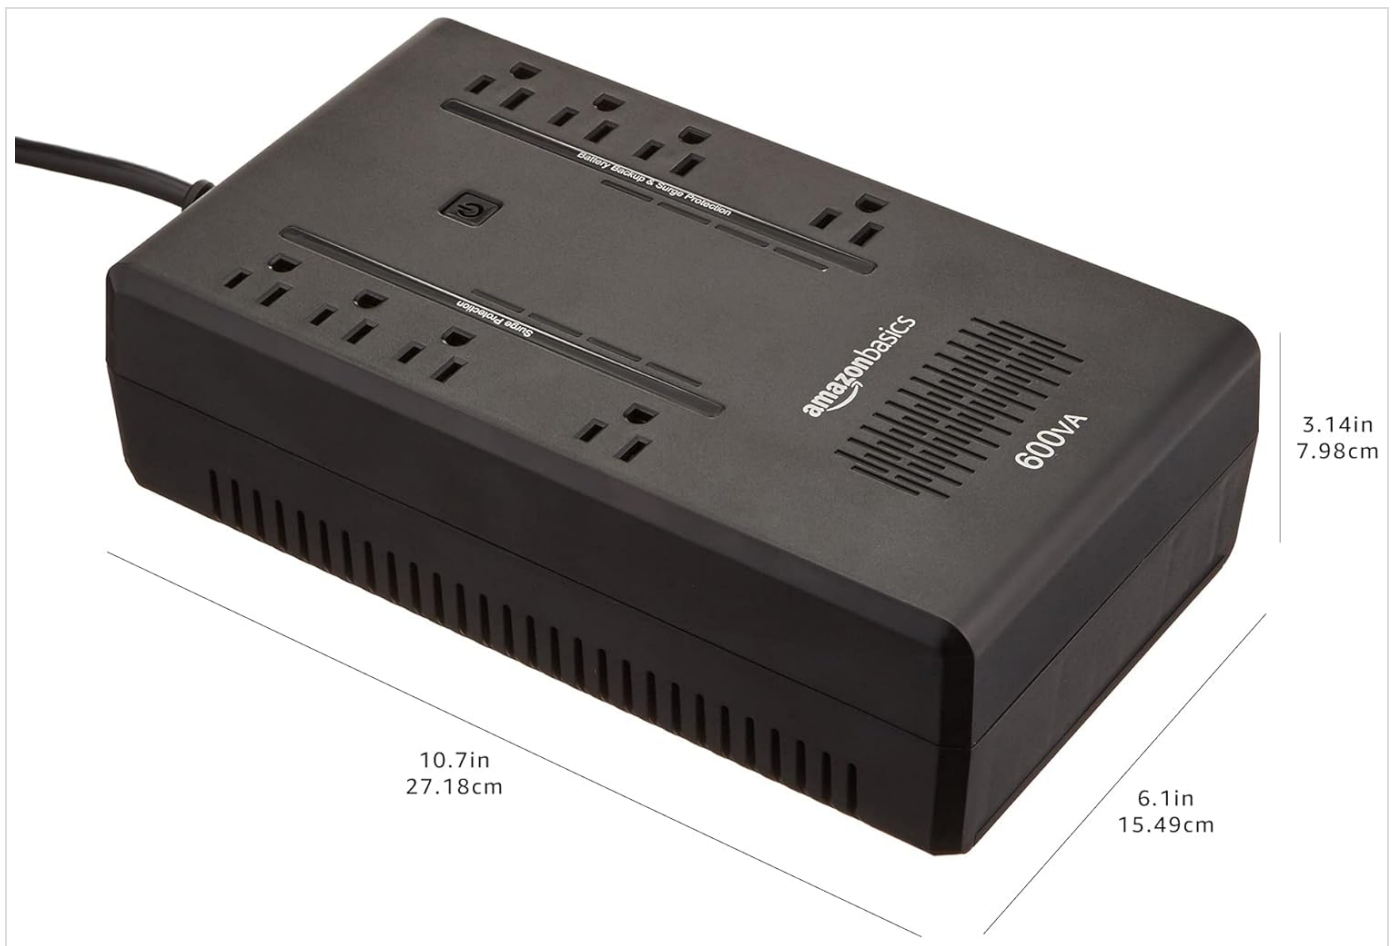

This image displays the physical dimensions of the Amazon Basics 600VA UPS, showing its length (10.7 inches), width (6.1 inches), and height (3.14 inches), along with their centimeter equivalents.



The UPS is shown in a typical home office environment, demonstrating its compact size and how it can be integrated with various electronic devices such as a computer monitor, a smartphone charger, and a keyboard.

SETUP

Initial Charging

Upon receiving your Amazon Basics UPS, it is crucial to charge the unit for a minimum of 8 hours before connecting any devices or using it for the first time. This ensures the internal battery is fully conditioned and ready to provide optimal backup power.

OPERATING INSTRUCTIONS

General Operation

The UPS provides continuous power to connected devices through its battery backup outlets during power outages or significant voltage drops. The surge-protected outlets offer protection against power surges and spikes. The unit

automatically switches to battery power when the main power supply is interrupted.

Power Management Software

Power management software is available for download to monitor the UPS status and manage connected devices. Refer to the 'Product guides and documents' section on the product's Amazon page for download links and installation instructions. This software can provide information on battery life and allow for controlled shutdowns of connected computers.

MAINTENANCE

To ensure the longevity and optimal performance of your UPS, keep it in a well-ventilated area, free from dust and extreme temperatures. Periodically check the cables for any signs of wear or damage. The internal battery is designed for a long lifespan, but its capacity may diminish over time. If the battery backup runtime significantly decreases, consider replacing the battery or the unit as per manufacturer guidelines.

TROUBLESHOOTING

Problem	Possible Cause	Solution
UPS does not turn on	Battery not charged or disconnected.	Ensure the UPS is plugged into a live wall outlet and has been charged for at least 8 hours. Verify the internal battery connection.
Short battery backup runtime	Overload or aging battery.	Reduce the number of connected devices or replace the battery if it's old. Ensure total load is below 80% of capacity.
No power to connected devices	UPS is off or tripped circuit breaker.	Press the power button to turn on the UPS. Check and reset the circuit breaker on the back of the unit if tripped.

SPECIFICATIONS

Feature	Detail
Product Dimensions	10.7 x 6.1 x 3.14 inches (27.18 x 15.49 x 7.98 cm)
Item Weight	6.54 pounds
Model Number	Amazon Basics UPS - 600 VA
Brand	Amazon Basics
Voltage	120 Volts
Color	Black
Material	Plastic
Battery Backup	600VA / 360W
Outlets	8 total (4 surge-protected, 4 battery-backup/surge-protected)
Cord Length	5-foot with NEMA 5-15P right angle and 45-degree offset plug

WARRANTY AND SUPPORT

For detailed warranty information and customer support, please refer to the official documentation provided with your product. You can also find additional resources, including the User Manual and Warranty documents, on the product's Amazon page:

[User Manual \(PDF\)](#)




[User Guide \(PDF\)](#)

[Warranty \(PDF\)](#)

For further assistance, please visit the [Amazon Basics Store](#).

© 2024 Amazon Basics. All rights reserved.

Related Documents - Amazon Basics UPS - 600 VA

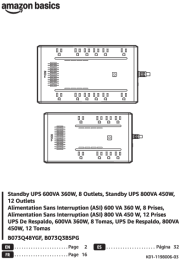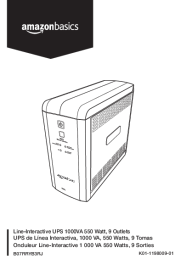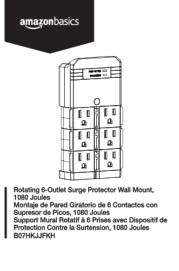 <p>amazon basics</p> <p>Standby UPS 600VA 360W, 6 Outlets, Standby UPS 800VA 400W, 12 Outlets Alimentation Sans Interruption (ASI) 600 VA 360 W, 6 Prises, Alimentation Sans Interruption (ASI) 800 VA 400 W, 12 Prises UPS De Repósito, 600VA 360W, 6 Tomas, UPS De Repósito, 800VA 400W, 12 Tomas</p> <p>B073Q48YGF, B073Q3BSPG</p> <p>Page 12 Page 14</p>	<p>Amazon Basics Standby UPS 600VA/800VA User Manual: Operation, Safety & Specifications</p> <p>Comprehensive user manual for Amazon Basics Standby UPS models 600VA (B073Q48YGF) and 800VA (B073Q3BSPG). Covers safety instructions, operation, troubleshooting, specifications, and FCC compliance.</p>
 <p>amazon basics</p> <p>Line-Interactive UPS 1000VA 550 Watt, 6 Outlets UPS de Ligne Interactive, 1000 VA, 550 Watts, 6 Tomas Onduleur Ligne-Interactive 1 000 VA, 550 Watts, 6 Sorties</p> <p>B073Q48YGF</p>	<p>AmazonBasics Line-Interactive UPS 1000VA 550W User Manual</p> <p>User manual for the AmazonBasics Line-Interactive UPS 1000VA 550W, covering safety, operation, troubleshooting, and specifications. Features 9 outlets for power backup and surge protection.</p>
 <p>amazon basics</p> <p>Rotating 6-Outlet Surge Protector Wall Mount, 1080 Joules Montaje de Pared Giratorio de 6 Contactos con Soporte de Pared, 1080 Joules Support Murale Rotatif à 6 Prises avec Dispositif de Protection Contre la Surpression, 1080 Joules</p> <p>B07HKJUF0H</p>	<p>AmazonBasics Rotating 6-Outlet Surge Protector Wall Mount, 1080 Joules - User Guide</p> <p>User guide for the AmazonBasics Rotating 6-Outlet Surge Protector Wall Mount, 1080 Joules. Includes setup, operation, safety precautions, cleaning, maintenance, and specifications.</p>



[Amazon Basics Chair Mat User Guide: Polycarbonate, PVC, and Vinyl Floor Protection](#)

Comprehensive user guide for Amazon Basics Polycarbonate, PVC, and Vinyl chair mats. Includes detailed instructions for unpacking, selection based on floor type, proper use, care, and safety guidelines for optimal floor protection and mat longevity.



[Amazon Basics Electronic Keypad Entry Lever Door Lock: Safety and Use Manual](#)

Comprehensive safety and use manual for the Amazon Basics Electronic Keypad Entry Lever Door Lock, covering installation, operation, programming, troubleshooting, and specifications.



[Amazon Basics Bluetooth Wireless On-Ear Headphones User Manual](#)

User manual for Amazon Basics Bluetooth Wireless On-Ear Headphones, Black. Provides instructions on setup, usage, troubleshooting, specifications, and legal notices.