

[manuals.plus](#) /

› [Dolphin](#) /

› [Dolphin Maytronics Power Supply 99956035 User Manual](#)

Dolphin 99956035US-F1

Dolphin Maytronics Power Supply 99956035 User Manual

Model: 99956035US-F1 | Brand: Dolphin

INTRODUCTION

This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your Dolphin Maytronics Power Supply 99956035. This advanced 120W power supply is designed for use with various Dolphin robotic pool cleaners, offering features like a weekly timer, cycle selector, and delay mode, especially for models with Bluetooth connectivity.



Image: The Dolphin Maytronics Power Supply 99956035, a white unit with a handle and a black control panel featuring a large power button and several indicator lights.

SAFETY INFORMATION

- Always disconnect the power supply from the mains before performing any maintenance or cleaning.
- Do not operate the power supply if the cable is damaged.
- Ensure the power supply is placed at least 3.5 meters (11.5 feet) from the edge of the pool.
- Do not immerse the power supply in water. It is designed to be splash-proof but not submersible.
- Keep out of reach of children.

PRODUCT OVERVIEW AND ANATOMY

The Dolphin Maytronics Power Supply 99956035 is an advanced 120W unit equipped with Bluetooth connectivity for enhanced control. It features an intuitive control panel with various indicators and buttons for managing your pool cleaner's operation.

PRODUCT ANATOMY

99956035US-F1

Compatible Models

Active 15, Active 20, Active 30, Active 30i, Advantage, Advantage Ultra, Cayman, Discovery Saturn, Explorer E20, Explorer E30, Mercury, Nautilus CC, Premium, Proteus DX3, Proteus DX4, Proteus DX5i, Quantum, S100, S200, S300, S300i, T25, T35, T45, T55i, Triton PS, Triton PS Plus

Power Supply Buttons

Weekly Timer, Cycle Selector and Delay Mode

*Features vary by model.

Replacement Power Supply 120W

Replacement Power Supply 120W Advanced Models only with Bluetooth/Wi-Fi

maytronics | 

Image: Detailed view of the power supply's control panel, highlighting the power button, weekly timer settings (1, 2, 3 days), cycle selector (normal/fast), and delayed start button. It also indicates the 120W power supply and compatible models.

Control Panel Features:

- **Power Button:** Turns the unit on/off.
- **Bluetooth Indicator:** Lights up when connected via Bluetooth to the MyDolphin™ Plus app.
- **Weekly Timer Buttons (1, 2, 3):**
 - **1:** Cleans every day for 7 days.
 - **2:** Cleans every other day for 7 days.
 - **3:** Cleans every third day for 7 days.
- **Cycle Selector (Normal/Fast):**
 - **Normal:** Standard cleaning cycle, covering floor, walls, and waterline.
 - **Fast:** Quick cleaning cycle, primarily focusing on the pool floor (approx. 1 hour).

- **Delayed Start Button:** Delays the start of the cleaning cycle by 2 hours.

SETUP

1. **Placement:** Position the power supply at least 3.5 meters (11.5 feet) from the edge of the pool. Ensure it is in a shaded area and not exposed to direct sunlight or standing water.
2. **Connect Cleaner:** Connect the floating cable of your Dolphin robotic pool cleaner to the power supply unit. Ensure a secure connection.
3. **Power On:** Plug the power supply into a grounded electrical outlet. The power button light will illuminate.

Your browser does not support the video tag.

Video: A demonstration of connecting the power supply and activating the unit, along with an overview of Dolphin pool cleaner features and maintenance.

OPERATING INSTRUCTIONS

The power supply allows for various cleaning modes and scheduling options to suit your pool's needs.

1. **Basic Operation:** Press the main power button to turn on the cleaner for a single normal operation cycle. The LED light around the power button will turn blue.
2. **Weekly Timer Settings:** Use the buttons labeled 1, 2, and 3 to set the cleaning frequency for a 7-day cycle.
 - Press once for daily cleaning (light 1 illuminates).
 - Press twice for cleaning every other day (light 2 illuminates).
 - Press three times for cleaning every third day (light 3 illuminates).

After 7 days, the cycle will end, and you will need to reset it.

3. **Cleaning Mode Selection:** Use the cycle selector button (circular arrows icon) to switch between Normal and Fast modes.
 - **Normal Mode:** The cleaner will perform a comprehensive cleaning of the pool floor, walls, and waterline.
 - **Fast Mode:** The cleaner will focus on the pool floor for a quicker cleaning cycle (approximately 1 hour). Note that in Fast Mode, the cleaner will not climb walls.

The power supply will remember the last selected mode for your next operation.

4. **Delayed Start:** Press the delayed start button (clock icon) after turning on the power to postpone the cleaning cycle by 2 hours.
5. **Bluetooth Connectivity:** If your Dolphin cleaner model supports it, you can connect to the MyDolphin™ Plus app via Bluetooth. The Bluetooth indicator light on the power supply will illuminate when connected. The app provides additional control and scheduling options.

ADVANCED POWER SUPPLY (120W) WITH BLUETOOTH



CERTIFIED
GENUINE
REPLACEMENT
PARTS



WORKS WITH BLUETOOTH ONLY VERSIONS OF THE FOLLOWING MODELS:

ACTIVE 30, ACTIVE 30i, MERCURY, PREMIUM, PROTEUS DX4, PROTEUS DX5i, S300, S300i, T45, T55i, TRITON PS PLUS

THIS POWER SUPPLY IS ALSO COMPATIBLE WITH THE FOLLOWING MODELS:

ACTIVE 15, ACTIVE 20, ADVANTAGE, ADVANTAGE ULTRA, CAYMAN, DISCOVERY SATURN, EXPLORER E20, EXPLORER E30, NAUTILUS CC, PROTEUS DX3, QUANTUM, TRITON PS, S100, S200, T25, T35

Image: The power supply unit highlighting its Bluetooth capability and listing various compatible Dolphin pool cleaner models.

COMPATIBILITY

This Replacement Power Supply 120W (advanced, Bluetooth) is compatible with the following Dolphin pool cleaner models:

- Active 15, Active 20, Active 30, Active 30i
- Advantage, Advantage Ultra
- Cayman, Discovery Saturn
- Explorer E20, Explorer E30
- Mercury, Nautilus CC, Premium
- Proteus DX3, Proteus DX4, Proteus DX5i
- Quantum, S100, S200, S300, S300i
- T25, T35, T45, T55i

- Triton PS, Triton PS Plus

Note: For models with Bluetooth, this power supply enables features such as weekly timer, cycle selector, and delay mode.

MAINTENANCE

Regular maintenance of your Dolphin pool cleaner's filter system is crucial for optimal performance. While the power supply itself requires minimal maintenance, ensuring your cleaner's filter is clean directly impacts the overall cleaning efficiency.

Filter Cleaning:

1. Remove the filter basket or cartridges from your Dolphin pool cleaner as per its specific model instructions.
2. Empty any large debris from the filter basket.
3. Rinse the filter elements thoroughly with a garden hose until all debris is removed. For fine filters, ensure all trapped particles are flushed out.
4. Allow the filters to dry completely before reinserting them into the cleaner.

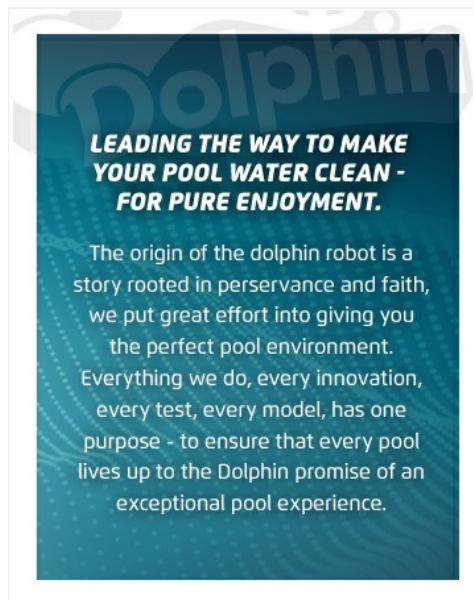


Image: A person demonstrating the removal and cleaning of the filter basket from a Dolphin pool cleaner.

TROUBLESHOOTING

If your Dolphin pool cleaner or power supply is not functioning as expected, consider the following general troubleshooting steps:

- **No Power:** Ensure the power supply is securely plugged into a working outlet and the power button is illuminated. Check the circuit breaker.
- **Cleaner Not Moving:** Verify that the cleaner's cable is properly connected to the power supply. Check for any obstructions in the cleaner's brushes or tracks.
- **Poor Cleaning Performance:** Clean the filter basket/cartridges thoroughly. Ensure the pool water chemistry is balanced.
- **Bluetooth Connectivity Issues:** Ensure your mobile device's Bluetooth is enabled and within range of the power supply. Restart both the power supply and your device.

For more detailed troubleshooting or specific error codes, please refer to the comprehensive manual provided with your

Dolphin robotic pool cleaner or visit the Maytronics support website.

SPECIFICATIONS

Feature	Detail
Model Number	99956035US-F1
Item Weight	0.01 Ounces
Product Dimensions	9.2 x 8.1 x 8.1 inches
Special Feature	Bluetooth
Control Method	App
Power Source	Corded Electric
Material	Plastic
Color	White
Installation Type	Plug-and-play

WARRANTY AND SUPPORT

The Dolphin Maytronics Power Supply 99956035 comes with a Limited Warranty. For specific warranty terms and conditions, please refer to the documentation included with your product or contact Maytronics customer support. For service, repair, or technical support, please visit the official Maytronics customer support website:

www.maytronicscs.com

Maytronics Certified Genuine Parts are recommended to keep your Dolphin pool cleaner in top condition.

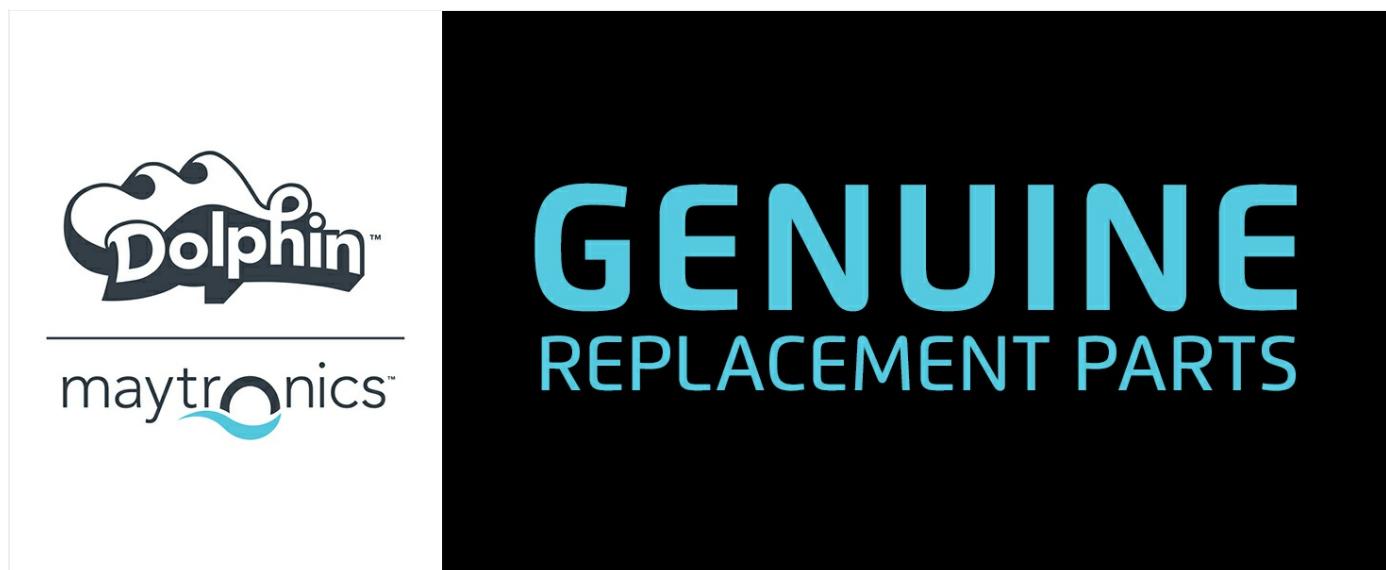


Image: Maytronics and Dolphin logos with text "GENUINE REPLACEMENT PARTS", emphasizing the use of authentic components for maintenance.

