

SM Saint Mossi SM-DY-16059

Saint Mossi 5-Lights K9 Crystal Chandelier Instruction Manual

Brand: SM Saint Mossi | Model: SM-DY-16059

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Saint Mossi 5-Lights K9 Crystal Chandelier. Designed to illuminate dining rooms, kitchen islands, and other indoor spaces, this rectangular pendant light fixture features high-quality K9 crystals and a chrome finish. Please read this manual thoroughly before beginning installation to ensure safe and proper use.

SAFETY INFORMATION

- Electrical Safety:** Always turn off the main power supply at the circuit breaker before installing, cleaning, or performing any maintenance on the light fixture. Ensure all wiring connections are secure and comply with local electrical codes. If you are unsure about electrical installation, consult a qualified electrician.
- Handling Crystals:** K9 crystals, while beautiful, can have sharp edges. Handle all crystal components with care and consider wearing protective gloves during assembly to prevent cuts.
- Weight:** The assembled chandelier has a significant weight (approximately 29.1 pounds). Ensure the ceiling junction box and mounting hardware are capable of supporting this weight securely.
- Indoor Use Only:** This fixture is designed for indoor use in dry locations only. Do not install in damp or wet environments.
- Bulb Compatibility:** Use only E12 base bulbs with a maximum wattage of 60W per bulb. The total maximum compatible wattage for the fixture is 250 watts.

PACKAGE CONTENTS

Carefully unpack all components and inspect for any damage. Keep all packaging materials until you are certain all parts are present and the fixture is fully assembled and functional. The package should include:

- Chandelier Frame (Metal body with chrome finish)
- K9 Crystal Components (various shapes and sizes)
- Mounting Hardware (Canopy, mounting bracket, screws, wire nuts, etc.)
- Installation Instructions
- Gloves (for handling crystals, if provided)

Note: E12 base bulbs are not included and must be purchased separately.

SPECIFICATIONS

Brand	SM Saint Mossi
Model Number	SM-DY-16059
Fixture Dimensions (L x W x H)	31 inches x 10 inches x 9 inches
Adjustable Hanging Height	Up to 59 inches (150 cm)
Material	K9 Crystal, Metal (Chrome Finish)
Number of Lights	5
Bulb Base	E12
Max Wattage per Bulb	60W
Total Max Wattage	250W
Dimmable	Yes (with dimmable bulbs and compatible dimmer switch)
Power Source	AC (120 Volts)
Installation Type	Ceiling Mount (Pendant/Adjustable Chain)
Item Weight	29.1 pounds

SETUP AND INSTALLATION

Installation of the Saint Mossi Chandelier requires careful attention to detail. It is recommended to have two people for installation due to the fixture's size and weight. Refer to the detailed instruction sheet included in your package for step-by-step guidance.

- 1. Prepare for Installation:** Before starting, ensure the power to the installation area is turned off at the circuit breaker. Gather all necessary tools (screwdriver, wire strippers, ladder, level).
- 2. Mounting the Fixture Base:**
Attach the mounting bracket to the ceiling junction box. Connect the electrical wires according to the provided instructions (usually black to black, white to white, ground to ground). Secure the canopy to the mounting bracket. It is easier to install the base without the crystals attached to reduce weight.

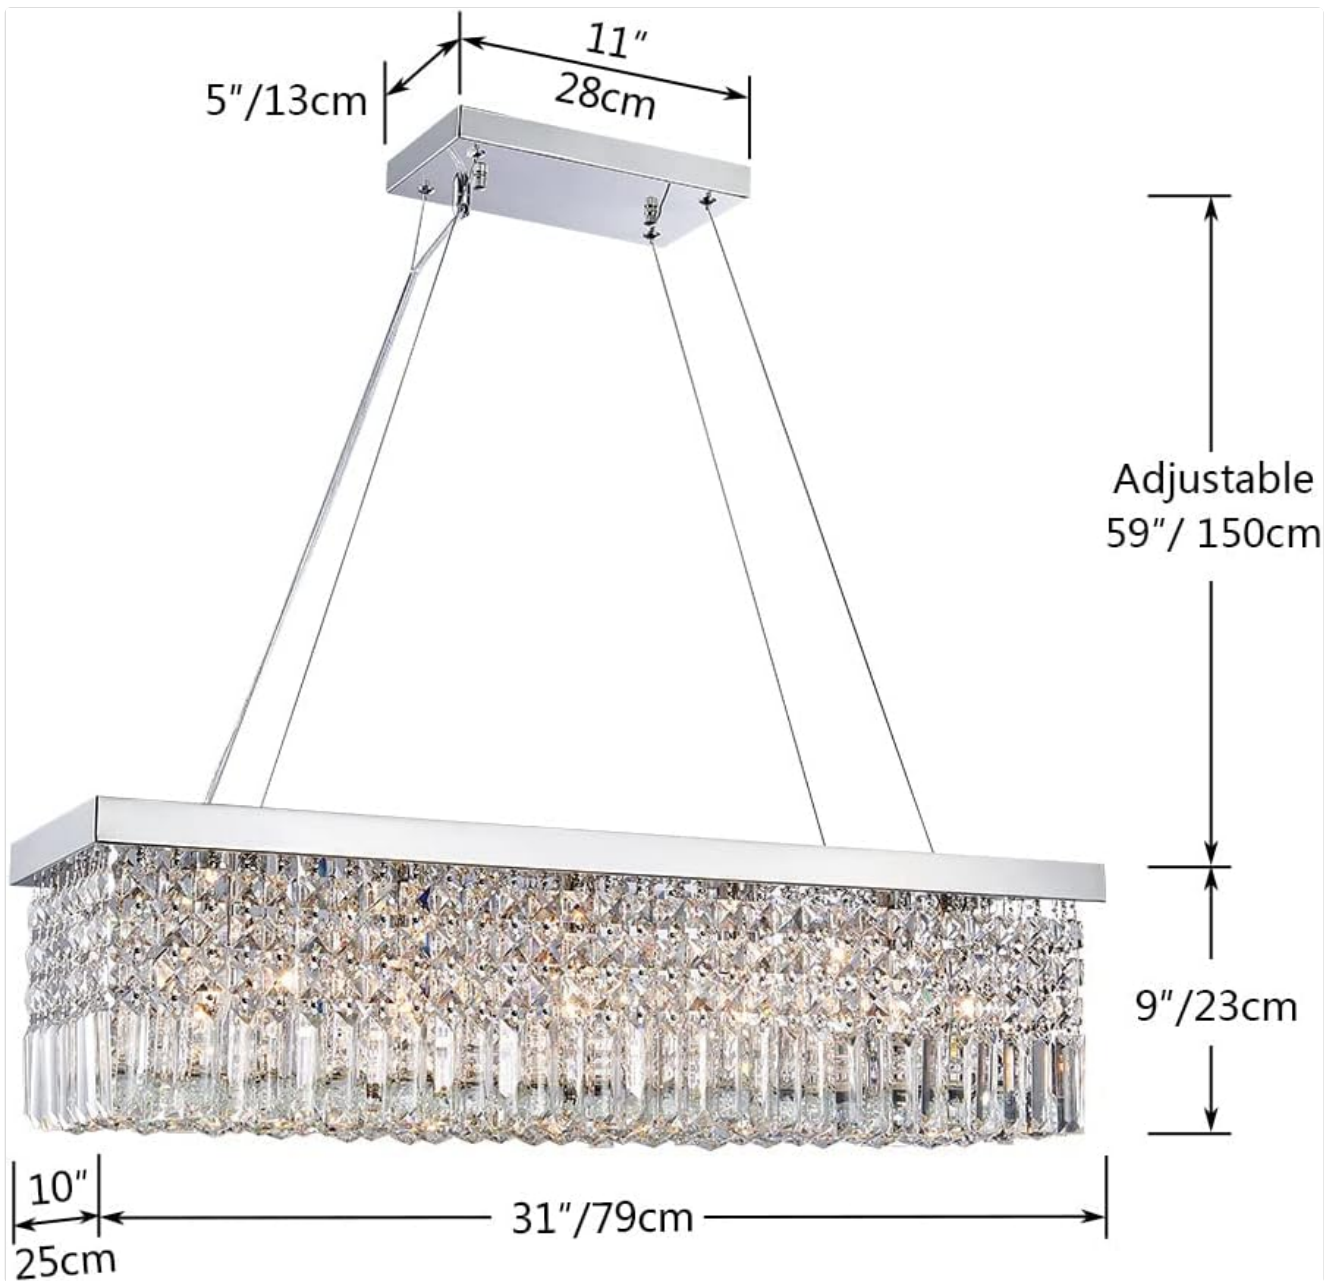


Figure 1: Chandelier Dimensions. This diagram illustrates the overall dimensions of the chandelier, including its length (31 inches), width (10 inches), fixture height (9 inches), and the adjustable chain length (up to 59 inches).



Figure 2: Component Details. This image provides detailed views of the chandelier's construction, showing the secure ceiling attachment mechanism, the connection points for the crystal strands, and the intricate facets of the K9 crystals.

3. **Adjusting Height:** The chandelier features an adjustable chain, allowing you to customize the hanging height to suit your space. Adjust the chain length before securing the fixture permanently. Use a level to ensure the fixture hangs straight.
4. **Attaching Crystals:** This is the most time-consuming part of the installation. The chandelier requires individual attachment of numerous crystal strands (approximately 140 pieces). Refer to the included instructions for the correct placement and method of attaching each crystal. Use the provided gloves to avoid fingerprints and protect your hands from sharp edges.
5. **Install Bulbs:** Once the fixture is securely mounted and all crystals are attached, install five E12 base bulbs (not included) into the sockets.



Figure 3: Installed Chandelier. A view of the fully assembled and installed chandelier, highlighting its elegant appearance and how it complements a modern interior space.

OPERATING INSTRUCTIONS

Once installed, operating your Saint Mossi Chandelier is straightforward.

- **Power On:** Restore power to the fixture at the circuit breaker.
- **Light Control:** Use your standard wall switch to turn the chandelier on and off.
- **Dimming Functionality:** This chandelier is fully dimmable. To utilize the dimming feature, you must use dimmable E12 bulbs and connect the fixture to a compatible dimmer switch (both sold separately).

MAINTENANCE

Regular maintenance will help preserve the beauty and longevity of your chandelier.

- **Cleaning the Crystals:** To clean the K9 crystals, gently wipe them with a soft, lint-free cloth dampened with a mild glass cleaner or distilled water. Avoid abrasive cleaners or harsh chemicals, as these can damage the crystal finish.
- **Cleaning the Metal Frame:** Wipe the chrome finish with a soft, dry cloth. Do not use abrasive pads or cleaners that could scratch the surface.
- **Bulb Replacement:** Always turn off the power at the circuit breaker before replacing bulbs. Allow bulbs to cool completely before touching them. Replace with E12 base bulbs, ensuring they do not exceed 60W per bulb.
- **Periodic Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Chandelier does not light up.	<ul style="list-style-type: none">◦ Power supply is off.◦ Loose wiring connection.◦ Defective bulbs.◦ Faulty wall switch.	<ul style="list-style-type: none">◦ Check the circuit breaker and wall switch.◦ Turn off power, then check all wire connections. Ensure they are secure.◦ Replace bulbs with new, working E12 bulbs.◦ Test the wall switch or consult an electrician.
Lights flicker or dim unexpectedly.	<ul style="list-style-type: none">◦ Loose bulb connection.◦ Incorrect bulb type for dimmer.◦ Faulty dimmer switch.	<ul style="list-style-type: none">◦ Ensure bulbs are screwed in tightly.◦ Use only dimmable E12 bulbs with a compatible dimmer.◦ Inspect or replace the dimmer switch.
Bulb sockets are loose or damaged.	<ul style="list-style-type: none">◦ Wear and tear over time.◦ Over-tightening bulbs.	<ul style="list-style-type: none">◦ If sockets are damaged, professional repair or replacement of the fixture may be necessary. Avoid over-tightening bulbs.

If the problem persists after attempting these solutions, please contact Saint Mossi customer service for further assistance.

WARRANTY AND SUPPORT

Saint Mossi is committed to customer satisfaction. If you have any questions, suggestions, or require assistance with your chandelier after receiving it, please refer to the installation guide first. If your issue is not resolved, do not hesitate to contact our customer service team. We are dedicated to providing support and ensuring your satisfaction.

For more information or to explore other products, visit the official [SM Saint Mossi Store](#).

