

[Manuals.plus](#) /

> [Metronic](#) /

> Metronic 480143 Wired TV/HiFi Headphones with 6m Cable Instruction Manual

Metronic 480143

Metronic 480143 Wired TV/HiFi Headphones with 6m Cable

Instruction Manual

1. INTRODUCTION

Thank you for choosing the Metronic 480143 Wired TV/HiFi Headphones. These over-ear headphones are designed to provide a comfortable audio experience for your television and HiFi systems. Featuring a generous 6-meter cable and a versatile 3.5mm to 6.35mm jack adapter, they offer flexibility and compatibility with various audio sources.



Image: The Metronic 480143 over-ear headphones in black, showcasing their design.

2. PACKAGE CONTENTS

Please ensure all items are present in the package:

- Metronic 480143 Wired TV/HiFi Headphones (with integrated 6-meter cable)
- 3.5mm to 6.35mm Jack Adapter



Image: The included 3.5mm jack and the detachable 6.35mm adapter.

3. SETUP

Follow these steps to connect your headphones to an audio source:

1. **Identify the Audio Output:** Locate the audio output port on your TV, HiFi system, or other audio device. This is typically a 3.5mm (headphone) jack or a 6.35mm (quarter-inch) jack.
2. **Connect the Cable:**
 - If your device has a 3.5mm jack, plug the 3.5mm connector of the headphone cable directly into the port.
 - If your device has a 6.35mm jack, screw the provided 6.35mm adapter onto the 3.5mm connector of the headphone cable, then plug the adapter into the 6.35mm port.
3. **Adjust Volume:** Once connected, adjust the volume on your audio source to a comfortable listening level.

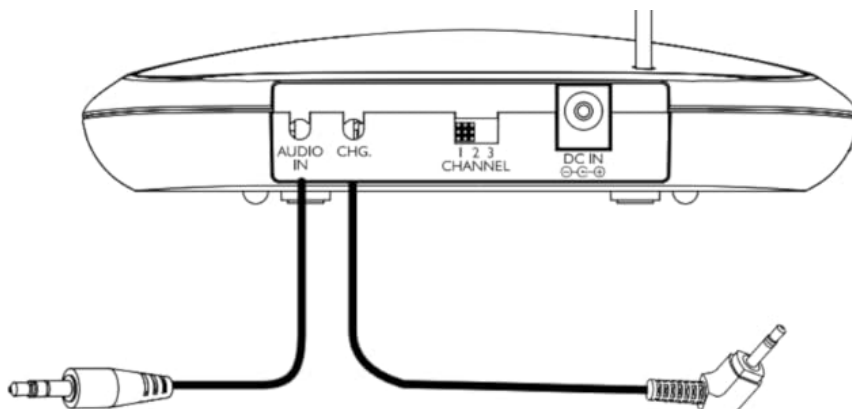


Image: A diagram illustrating the connection of the headphones to an audio input, showing both 3.5mm and 6.35mm jack options.

4. OPERATING INSTRUCTIONS

These headphones are designed for straightforward use:

- **Wearing the Headphones:** Place the headphones over your ears, ensuring the earcups fully cover them for optimal

sound and comfort. The headband is adjustable to fit various head sizes.

- **Volume Control:** The headphones do not feature integrated volume control. Adjust the audio volume directly from your connected device (TV, HiFi system, etc.).
- **Cable Management:** The 6-meter cable provides ample length for movement. It is recommended to fully extend the cable during use to prevent kinks or damage.



Image: The Metronic headphones resting on a sofa, positioned near a television, illustrating a typical usage scenario.



Image: A couple comfortably watching television while wearing headphones, demonstrating shared quiet listening.

5. MAINTENANCE

Proper care will extend the life of your headphones:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the headphones. Do not use liquid cleaners or solvents.
- **Storage:** When not in use, store the headphones in a clean, dry place away from extreme temperatures and direct sunlight. Avoid tightly coiling the cable to prevent damage.
- **Cable Care:** Handle the 6-meter cable with care. Avoid sharp bends, pulling, or tangling, as this can lead to internal

wire damage.

6. TROUBLESHOOTING

If you encounter issues, refer to the following common solutions:

Problem	Possible Cause	Solution
No sound	<ul style="list-style-type: none">Headphone cable not fully plugged in.Incorrect adapter used.Device volume too low or muted.Incorrect audio output selected on device.	<ul style="list-style-type: none">Ensure the 3.5mm jack (and 6.35mm adapter if applicable) is securely connected to the audio source.Verify the correct adapter is used for your device's port.Increase the volume on your audio source.Check your device's audio settings to ensure output is directed to the correct port.
Sound is distorted or unclear	<ul style="list-style-type: none">Volume too high.Loose connection.Damaged cable.	<ul style="list-style-type: none">Lower the volume on your audio source.Ensure all connections are secure.Inspect the cable for any visible damage. If damaged, discontinue use.
Headphones are uncomfortable	Incorrect fit.	Adjust the headband to find a comfortable fit. Ensure earcups are properly positioned over your ears.

7. SPECIFICATIONS

Feature	Detail
Model Number	480143
Cable Length	6 meters
Impedance	32 Ohms
Frequency Response	20 Hz - 20,000 Hz
Sensitivity	108 dB
Connectors	3.5mm Jack (with included 6.35mm adapter)
Ear Placement	Over-ear (Circumaural)
Material	Plastic
Dimensions (Product)	19 x 4 x 21 cm
Weight (Product)	300 g
Compatible Devices	TV, HiFi equipment

8. WARRANTY AND SUPPORT

This product comes with a **2-year warranty** from the date of purchase. For warranty claims or technical support, please contact your retailer or visit the official Metronic website for further assistance.

For more information, you may visit the [Metronic Brand Store](#).