

Artlii Artlii Stone 1

Artlii Stone 1 Full HD Projector User Manual

Model: Artlii Stone 1 | Brand: Artlii

1. INTRODUCTION

This manual provides comprehensive instructions for the safe and efficient operation of your Artlii Stone 1 Full HD Projector. Please read this manual thoroughly before using the projector and retain it for future reference. The Artlii Stone 1 is designed to deliver a high-quality visual experience with its native 1080P resolution and advanced features.

2. SAFETY INFORMATION

Observe the following safety precautions to prevent fire, electric shock, or injury, and to prolong the life of your projector:

- Power Supply:** Use only the power adapter supplied with the projector. Ensure the power outlet voltage matches the projector's requirements.
- Ventilation:** Do not block the ventilation openings. Ensure adequate space around the projector for proper airflow to prevent overheating.
- Heat:** The projector lamp and internal components generate heat. Avoid touching the projector's surface immediately after use.
- Liquid and Moisture:** Do not expose the projector to rain, moisture, or any liquids. If liquid enters the projector, disconnect the power immediately and contact customer support.
- Cleaning:** Disconnect the power cord before cleaning. Use a soft, dry cloth. Do not use liquid or aerosol cleaners.
- Location:** Place the projector on a stable, level surface. Avoid placing it in direct sunlight, near heat sources, or in environments with excessive dust or humidity.
- Eye Protection:** Do not look directly into the projector lens when the lamp is on. The bright light can cause eye damage.
- Servicing:** Do not attempt to repair the projector yourself. Refer all servicing to qualified service personnel.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- Artlii Stone 1 Full HD Projector
- Power Cable

- Remote Control (batteries not included)
- AV Cable
- HDMI Cable
- User Manual

4. PRODUCT OVERVIEW

Familiarize yourself with the components of your Artlii Stone 1 projector.

4.1 Front View



Image: Front view of the Artlii Stone 1 projector, showing the lens, focus ring, and keystone correction dial.

- **Projection Lens:** Emits the image onto the screen.
- **Focus Ring:** Adjusts the clarity of the projected image.
- **Keystone Correction Dial:** Corrects trapezoidal distortion of the image.

4.2 Rear and Side Views (Ports)

ZOOM FUNCTION

Suitable Screen Size



Zoom Adjustment Ratio Between 75%-100%

Image: Side view of the Artlii Stone 1 projector highlighting the various input and output ports, including HDMI, USB, VGA, and audio out.

- **HDMI Ports (x2):** Connect to HDMI-enabled devices such as laptops, gaming consoles (PS4, Xbox, Switch), TV sticks, and Blu-ray players.
- **USB Port:** Connect USB drives for media playback.
- **VGA Port:** Connect to computers with VGA output.
- **SD Card Slot:** Insert SD cards for media playback.
- **3.5mm Audio Out:** Connect external speakers or headphones.
- **Power Input:** Connect the power cable.

5. SETUP

5.1 Placement and Screen Size

Optimal projection distance and screen size are crucial for the best viewing experience. The Artlii Stone 1 supports screen sizes up to 300 inches.

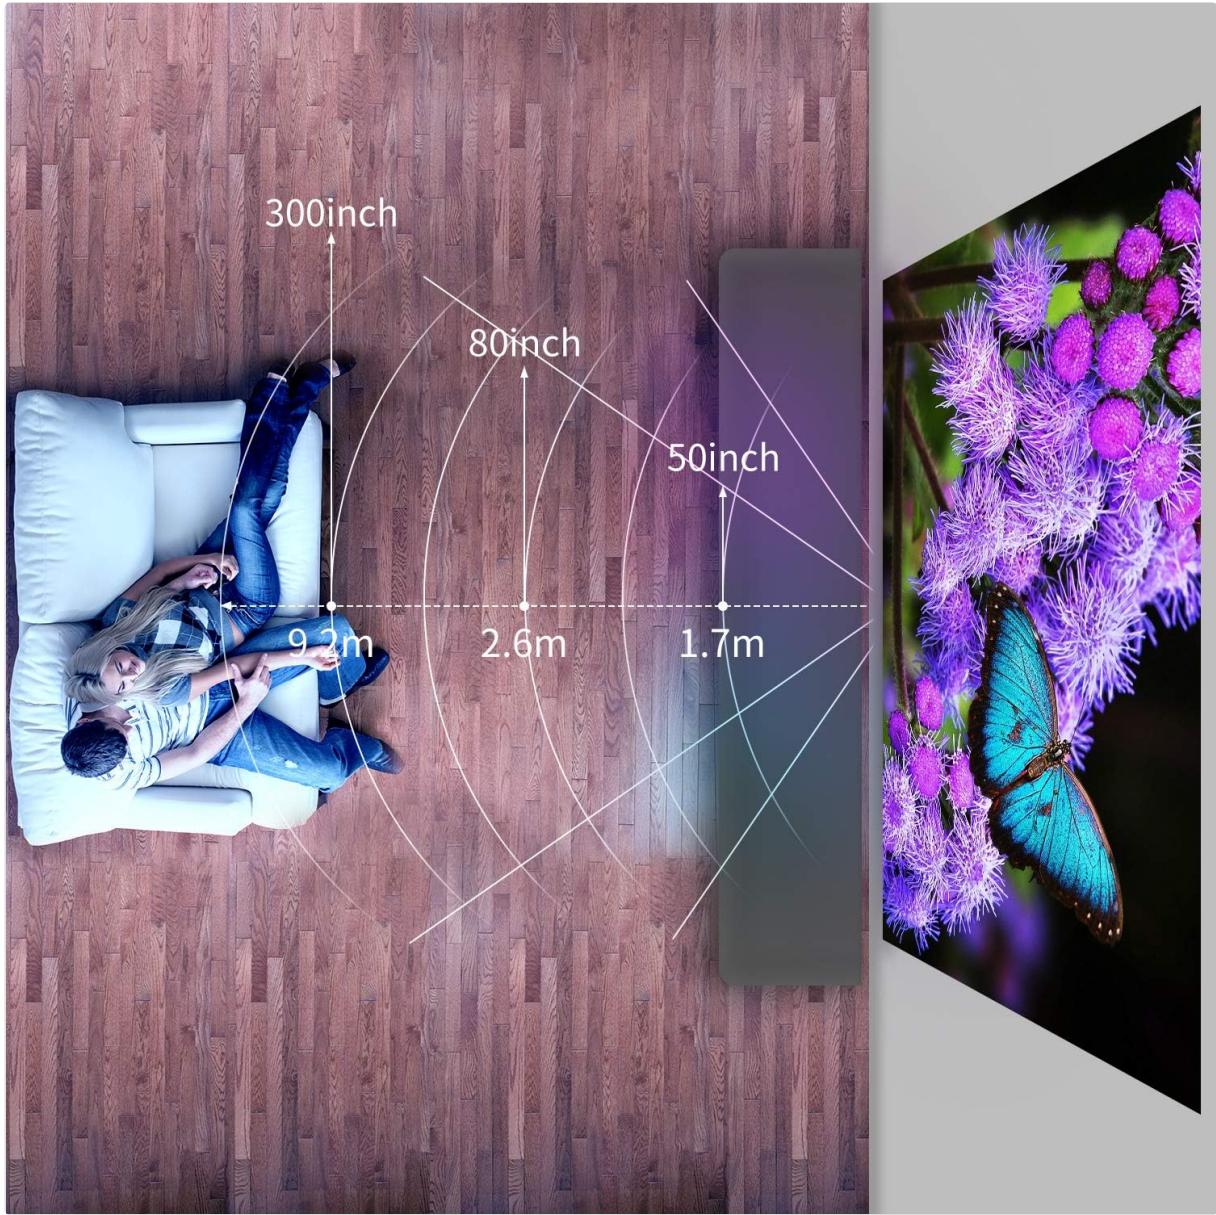


Image: Diagram illustrating recommended projection distances for various screen sizes, showing distances for 50-inch, 80-inch, and 300-inch projections.

Refer to the diagram for recommended distances. Adjust the projector's position to achieve your desired screen size.

5.2 Power Connection

1. Connect the power cable to the projector's power input port.
2. Plug the other end of the power cable into a power outlet.
3. The power indicator light on the projector will illuminate.

5.3 Initial Adjustments

1. **Focus Adjustment:** Rotate the focus ring on the lens until the projected image appears sharp and clear.
2. **Keystone Correction:** If the image appears trapezoidal (wider at the top or bottom), rotate the keystone correction dial to square the image.

6. OPERATING INSTRUCTIONS

6.1 Power On/Off

- **To Power On:** Press the power button on the projector or the remote control. The projector will start up and display the main interface.
- **To Power Off:** Press the power button again. Confirm shutdown if prompted. Allow the fan to run briefly to cool down the lamp before disconnecting power.

6.2 Connecting Devices

The Artlii Stone 1 offers multiple connectivity options:

- **HDMI:** Connect your device (e.g., laptop, game console, TV stick) to one of the HDMI ports using the provided HDMI cable.
- **USB:** Insert a USB flash drive into the USB port. The projector will typically detect the drive automatically.
- **VGA:** Connect your computer to the VGA port using a VGA cable.
- **SD Card:** Insert an SD card into the SD card slot.
- **AV:** Use the provided AV cable to connect older devices with AV output.

6.3 Input Source Selection

After connecting a device, you may need to manually select the input source:

- Press the "Source" or "Input" button on the remote control or the projector's control panel.
- Navigate through the options (HDMI1, HDMI2, USB, VGA, AV, SD) using the arrow keys and press "OK" to confirm your selection.

6.4 Menu Navigation

Use the remote control to navigate the projector's on-screen menu:

- Press the "Menu" button to access settings.
- Use the arrow keys to move between options (Picture, Sound, Time, Option).
- Press "OK" to enter a sub-menu or confirm a setting.
- Press "Exit" or "Return" to go back to the previous menu or exit the menu.

6.5 Zoom Function

The Artlii Stone 1 features a digital zoom function, allowing you to adjust the screen size from 75% to 100% without moving the projector.

ZOOM FUNCTION



Image: Screenshot of the projector's on-screen display showing the zoom adjustment from 100% down to 75%, demonstrating the digital zoom feature.

Access the zoom setting through the projector's menu (usually under "Picture" or "Option" settings) and adjust the percentage as needed.

6.6 Audio Output

The projector has built-in speakers. For enhanced audio, connect external speakers or headphones to the 3.5mm audio out port.

7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your projector.

- Lens Cleaning:** Use a soft, lint-free cloth specifically designed for optical lenses to gently wipe the projector lens. Do not use abrasive cleaners or excessive force.
- Dust Removal:** Periodically clean the projector's exterior with a soft, dry cloth. The Artlii Stone 1 features an accessible design for internal dust cleaning, which can be performed by opening a designated trap door. For persistent dust spots on the projection, professional cleaning may be required.

- **Lamp Life:** The LED lamp in the Artlii Stone 1 has an estimated lifespan of over 50,000 hours under normal usage conditions. No lamp replacement is typically needed during the product's lifetime.

8. TROUBLESHOOTING

If you encounter issues with your projector, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No image projected	Power not connected; Incorrect input source; Device not connected properly.	Ensure power cable is securely connected. Select the correct input source (HDMI, USB, etc.). Check all cable connections.
Image is blurry	Focus not adjusted; Projector too close/far from screen.	Adjust the focus ring on the lens. Reposition the projector for optimal distance.
Image is trapezoidal	Keystone not corrected.	Adjust the keystone correction dial until the image is rectangular.
No sound	Volume too low; Audio cable not connected; Muted.	Increase volume. Ensure audio cables are connected correctly. Unmute the projector or source device.
Fan noise is loud	Normal operation; Blocked ventilation.	A certain level of fan noise is normal for cooling. Ensure ventilation openings are not blocked.
Dust spots on projection	Dust accumulated inside the optical path.	Clean the lens. If spots persist, refer to the maintenance section regarding internal dust cleaning or contact support.

9. SPECIFICATIONS

Key technical specifications for the Artlii Stone 1 Full HD Projector:

Feature	Detail
Model	Artlii Stone 1
Native Resolution	1920 x 1080P (Full HD)
Brightness	330 ANSI Lumens
Contrast Ratio	7000:1
Lamp Life	50,000 hours (LED)
Projection Size	50 - 300 inches
Aspect Ratio	4:3 / 16:9
Connectivity	2x HDMI, 1x USB, 1x VGA, 1x SD Card, 1x 3.5mm Audio Out
Keystone Correction	Manual

Feature	Detail
Zoom Function	75% - 100% (Digital)
Dimensions (L x W x H)	23.1 x 30.7 x 10.4 cm
Weight	2.6 kg

Note: Specifications are subject to change without prior notice.

10. WARRANTY AND SUPPORT

Artlii products come with a standard manufacturer's warranty. For detailed warranty information, product support, or technical assistance, please refer to the warranty card included in your package or visit the official Artlii website. You can also contact Artlii customer service through the platform where you purchased the product.

For further assistance, please visit: [Artlii Official Store](#)

© 2025 Artlii. All rights reserved.

Related Documents

	<p>Artlii Play3 Projector User Manual</p> <p>Comprehensive user manual for the Artlii Play3 projector, covering installation, operation, safety precautions, and features. Learn how to set up and use your Artlii Play3 for an optimal viewing experience.</p>
	<p>Artlii Energon2 Projector User Manual</p> <p>User manual for the Artlii Energon2 5G WiFi Bluetooth Projector, featuring 4K support, 1080P native Full HD, 340 ANSI lumens, and a 250-inch screen. Compatible with iOS, Android, and PS5.</p>
	<p>Artlii Amento Full HD 1080P LED Projector</p> <p>Discover the Artlii Amento, a versatile LCD LED projector offering HDTV 1920x1080 resolution, 450 ANSI lumens, and 30,000 hours of LED life. Features include Airplay, Miracast, Bluetooth, and 4K compatibility, ideal for home entertainment and presentations.</p>
	<p>Artlii Play 4 Projector Instruction Manual</p> <p>Comprehensive instruction manual for the Artlii Play 4 projector, covering setup, remote functions, connectivity options like WiFi and Miracast, and basic operations.</p>