

Marmitek Surround Anywhere 221

Marmitek Surround Anywhere 221 Wireless Speaker Kit User Manual

Model: Surround Anywhere 221

1. INTRODUCTION

The Marmitek Surround Anywhere 221 is designed to convert your existing wired rear speakers into wireless speakers, eliminating the need for long speaker cables across your room. This kit provides high-quality, uncompressed digital audio transmission without delay, ensuring an optimal surround sound experience.



Image 1.1: Marmitek Surround Anywhere 221 Transmitter and Receiver units. The top unit is the transmitter, and the bottom unit is the receiver, both in a sleek black finish.

Niente più cavi per altoparlanti sul pavimento



Image 1.2: A living room setup demonstrating the benefit of wireless speakers, with no visible cables on the floor.

2. SAFETY INFORMATION

Please read and understand all safety instructions before using this product. Keep this manual for future reference.

- Interference may occur with other wireless devices operating at the same 2.4 GHz frequency. Maintain adequate distance from other wireless devices to minimize interference.
- Do not expose the device to extreme temperatures, humidity, or direct sunlight.
- Do not open the device casing. Servicing should only be performed by qualified personnel.
- Use only the provided power adapters.

3. PACKAGE CONTENTS

Verify that all items are present in the package:


- 1x Transmitter unit
- 1x Receiver unit
- 1x Power adapter for Transmitter (185 cm cable)
- 1x Power adapter for Receiver (145 cm cable)
- 1x Speaker cable (60 cm)




1x transmitter




1x receiver

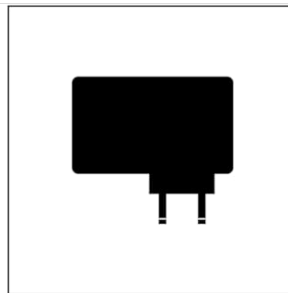


1x Power adapter
(transmitter)
| 185 cm



1x Power adapter
(receiver) | 145 cm
| + flying lead
150 cm



2x Speaker cable
| 60 cm



1x User manual

Cosa c'è nella scatola

MARMITEK.

Image 3.1: Visual representation of the items included in the Marmitek Surround Anywhere 221 package.



Confezione

MARMITEK.

Image 3.2: The retail packaging for the Marmitek Surround Anywhere 221 kit.

4. PRODUCT OVERVIEW

The Marmitek Surround Anywhere 221 consists of a transmitter and a receiver unit. The transmitter connects to your AV receiver's speaker outputs, and the receiver connects to your rear speakers.

Key Features:

- **Uncompressed Digital Transmission:** Ensures superior sound quality, comparable to CD audio, without interference or delay.
- **Integrated Amplifier:** The receiver features a built-in amplifier providing sufficient power for your speakers (2 x 25 W RMS / 2 x 50 W musical power).
- **Volume Control:** A dedicated volume control on the receiver allows for balanced sound between front and rear speakers.
- **Direct Speaker Output Connection:** Volume adjusts automatically with your main audio system when connected directly to speaker outputs.
- **Secure Pairing:** Transmitter and receiver are securely paired, allowing up to 6 sets to be used in the same room without interference.



Image 4.1: An internal view of the receiver unit, highlighting its electronic components and integrated amplifier.



Collega due altoparlanti con un solo trasmettitore

Grazie all'associazione sicura puoi utilizzare fino a 6 dispositivi nella stessa casa senza interferenze.

MARMITEK.

Image 4.2: A schematic diagram illustrating the wireless audio signal path from a surround sound system to the rear speakers via the transmitter and receiver.

5. SETUP INSTRUCTIONS

Follow these steps to set up your Marmitek Surround Anywhere 221 kit:

1. Connect the Transmitter:

- Locate the speaker outputs on your AV receiver or amplifier that are designated for your rear speakers (e.g., "Surround Left" and "Surround Right").
- Connect the speaker cables from these outputs to the "SPEAKER INPUT R" and "SPEAKER INPUT L"

terminals on the **Transmitter** unit. Ensure correct polarity (+ to + and - to -).

- Connect the transmitter's power adapter to the "DC 5V" input and then plug it into a power outlet.

2. **Connect the Receiver:**

- Position the **Receiver** unit near your rear speakers.
- Connect your rear speakers to the "SPEAKER OUTPUT R" and "SPEAKER OUTPUT L" terminals on the **Receiver** unit using speaker cables. Ensure correct polarity.
- Connect the receiver's power adapter to the "DC 5V" input and then plug it into a power outlet.

3. **Power On and Pair:**

- Turn on both the Transmitter and Receiver units using their respective ON/OFF switches.
- The units should automatically pair. A status indicator light (usually blue) will confirm a successful connection.

4. **Initial Volume Adjustment:**

- Start with the volume knob on the receiver unit set to a low level.
- Play audio through your AV receiver and gradually increase the receiver's volume until the rear speakers are balanced with your front speakers.

Trasmettitor



2 cavi per altoparlanti
da 60 cm inclusi

collegamenti dei cavi degli altoparlanti

energia

on / off

Ricevitore



controllo del volume per
bilanciare gli altoparlanti
anteriori e posteriori durante
l'installazione

collegamenti dei cavi degli
altoparlanti

energia

on / off

Collegalo alle uscite degli altoparlanti del tuo ricevitore per un controllo del volume rapido e semplice

Il controllo del volume sul ricevitore Surround Anywhere uniforma il suono, bilanciando gli altoparlanti surround con il resto della configurazione.

MARMITEK.

Image 5.1: Connection diagram for the transmitter and receiver units, showing speaker cable and power connections.



Tutto in uno con amplificatore integrato

Dotato di un amplificatore integrato da 2 x 25 W RMS (ovvero 2 x 50 W di potenza musicale). Perfetto per diffusori surround. Hai bisogno di più potenza per l'hi-fi? Scegli Speaker Anywhere 750.

MARMITEK.

Image 5.2: A close-up view of the speaker input/output terminals and the volume control knob on the receiver unit.

6. OPERATING INSTRUCTIONS

Once set up, the Marmitek Surround Anywhere 221 operates largely automatically. Here are some operational considerations:

- **Power On/Off:** The units can be turned on or off using their respective switches. For optimal convenience, you can connect them to switched power outlets that turn on with your AV receiver.
- **Volume Synchronization:** When connected to the speaker outputs of your AV receiver, the volume of the wireless rear speakers will automatically adjust with the main volume control of your AV system.
- **Fine-tuning Volume:** Use the volume knob on the receiver unit to fine-tune the balance of the rear speakers relative to the front speakers. This allows you to achieve your preferred surround sound immersion.
- **Multiple Sets:** If using multiple Surround Anywhere 221 kits in the same area, the secure pairing ensures that each transmitter communicates only with its paired receiver, preventing interference.



Image 6.1: The volume control knob on the receiver, used for balancing rear speaker levels.

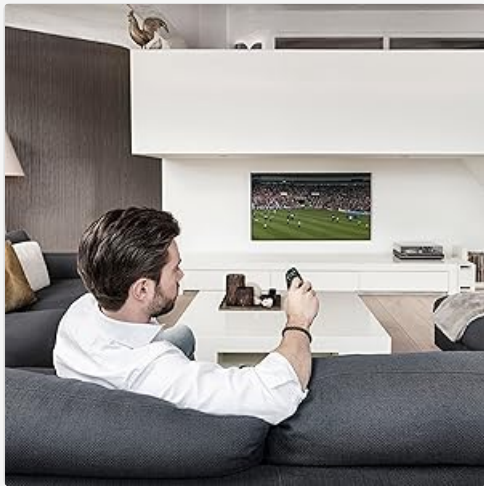


Image 6.2: The master volume control on a typical AV receiver, which will synchronize with the wireless rear speakers.

7. MAINTENANCE

The Marmitek Surround Anywhere 221 requires minimal maintenance:

- **Cleaning:** Use a soft, dry cloth to clean the units. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure the units have adequate ventilation to prevent overheating. Do not cover them or place them in enclosed spaces.
- **Cable Management:** Periodically check all cable connections to ensure they are secure and free from damage.

8. TROUBLESHOOTING

If you encounter issues with your Surround Anywhere 221, try the following:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No sound from rear speakers	• Units not powered on • Incorrect cable connections • Units not paired • Volume on receiver too low • AV receiver rear speaker output disabled	• Ensure both transmitter and receiver are powered on. • Check all speaker and power cable connections for correct polarity and secure fit. • Power cycle both units to re-establish pairing. • Increase the volume on the receiver unit. • Verify that your AV receiver's rear speaker outputs are enabled and configured correctly.
Sound interference or dropouts	• Proximity to other 2.4 GHz wireless devices • Obstructions between transmitter and receiver	• Move the units further away from Wi-Fi routers, cordless phones, or other 2.4 GHz devices. • Ensure a clear line of sight or minimal obstructions between the transmitter and receiver.
Rear speaker volume too loud/quiet	• Receiver volume not balanced	• Adjust the volume knob on the receiver unit to achieve the desired balance with your front speakers.

9. SPECIFICATIONS

Feature	Detail
Brand	Marmitek
Model Number	08200
Connectivity Technology	Wireless (2.4 GHz)
Power Source	Corded Electric
Material	Plastic
Transmitter Dimensions (L x W x H)	120 x 82 x 30 mm (approx.)
Receiver Dimensions (L x W x H)	155 x 110 x 35 mm (approx.)
Product Weight	200 grams (total, approx.)
Amplifier Output (Receiver)	2 x 25 W RMS (2 x 50 W musical power)
Special Feature	Uncompressed digital transmission for high-quality sound



Dimensioni

MARMITEK.

Image 9.1: Dimensions of the Marmitek Surround Anywhere 221 transmitter and receiver units.

10. WARRANTY AND SUPPORT


Marmitek products are designed and manufactured to the highest standards. This product is covered by a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the documentation provided with your purchase or visit the official Marmitek website.



For technical support, troubleshooting assistance, or warranty claims, please contact Marmitek customer service or your retailer. Contact information can typically be found on the Marmitek website or in your product packaging.



Image 10.1: "Dutch Quality EU European Standards" badge, indicating product quality and compliance.

Related Documents - Surround Anywhere 221

MARMITEK. boomboom 76 Bluetooth receiver a10 - Portable - Battery  Package content 1 x boomboom 76 1 x USB-A to USB-C cable 1 x Quick start guide	Marmitek BoomBoom 76: Portable Bluetooth Receiver User Manual Discover the Marmitek BoomBoom 76, a portable Bluetooth receiver for wireless music streaming and hands-free calls. This guide covers setup, operation, features, and technical specifications.
MARMITEK. Split 712 HDMI 2.1 splitter Connect two HDMI or HDCP2.1 source devices to one HDMI 2.1 output device. - 8K60Hz - 4K120Hz - VRR - ALLM Package content 1 x Split 712 splitter 1 x HDMI 2.1 cable 1 x power adapter    Connect 1 Multi language user guide	Marmitek Split 712 HDMI 2.1 Splitter: 8K60hz, 4K120hz, HDR, VRR, ALLM User manual and technical specifications for the Marmitek Split 712 HDMI 2.1 splitter. Learn about its features including 8K60hz/4K120hz support, HDR, VRR, ALLM, EDID modes (Auto, Copy, Scaler), installation, and connectivity.
MARMITEK. Connect DA21™  3 User manuals 9 Gebrauchsanleitung 16 Guide utilisateur 21 Modo d'impiego 27 Manuale d'istruzioni 33 Gebrauchsanweisung	Marmitek Connect DA21™ Digital to Analog Audio Converter User Manual User manual for the Marmitek Connect DA21™, a digital to analog audio converter. This guide provides instructions on installation, usage, technical specifications, safety precautions, and compliance information.
MARMITEK. MegaView 90  3 User manuals 11 Gebrauchsanleitung 19 Guide utilisateur 27 Modo d'impiego 35 Manuale d'istruzioni 43 Gebrauchsanweisung	Marmitek MegaView 90 HDMI Extender User Manual User manual for the Marmitek MegaView 90, an HDMI extender that transmits signals over a single CAT5e/6 Ethernet cable up to 120 meters. Includes setup, specifications, and troubleshooting.

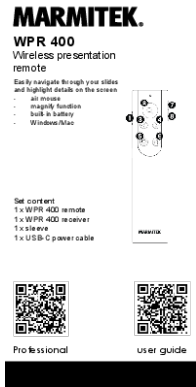 BOOMBROOM 80 USER MANUAL 1 GEBRAUCHSANLEITUNG 11 GUIDE UTILISATEUR 19 MODO DE EMPLEO 27 MANUALE D'ISTRUZIONI 35 GEBRUIKSAANWIJZING 43 2009/20170718 • BOOMBROOM 80™ ALL RIGHTS RESERVED MARMITEK MARMITEK.	Marmitek BoomBoom 80 Bluetooth Audio Receiver User Manual User manual for the Marmitek BoomBoom 80 Bluetooth audio receiver. Learn how to connect, pair, and use the device wirelessly with your sound system. Includes technical specifications and troubleshooting.
 MARMITEK. WPR 400 Wireless presentation remote Easy to navigate through your slides and highlight details on the screen - all modes - magically function - built in battery - Windows/Mac Set content: 1 x WPR 400 remote 1 x WPR 400 receiver 1 x sleeve 1 x USB C power cable Professional user guide	Marmitek WPR 400 Wireless Presentation Remote User Manual Comprehensive guide to the Marmitek WPR 400 wireless presentation remote, covering setup, features, operation modes, software, and technical specifications for seamless presentations.

Documents - Marmitek – Surround Anywhere 221

 SURROUND ANYWHERE 221 Digital Wireless Surround Sender USER MANUAL 3 GEBRAUCHSANLEITUNG 15 GUIDE UTILISATEUR 27 MODO DE EMPLEO 35 MANUALE D'ISTRUZIONI 51 GEBRUIKSAANWIJZING 63 2009/20170718 • SURROUND ANYWHERE 221™ ALL RIGHTS RESERVED MARMITEK MARMITEK.	[pdf] User Manual Quick Start Guide Instructions Guide Marmitek Surround Anywhere 221 user guide Bol SURROUND ANYWHERE 221™ Digital Wireless Sender USER MANUAL GEBRAUCHSANLEITUNG GUIDE UTILISATEUR MODO DE EMPLEO files d901b526e71cb887d91ff3a54e086d31 nordestsnc ufiles Make your existing rear surround speakers wireless Connect set 39 s wirelessly no loose cables trailing through living room The un digital link provides better than CD quality sound without interference or delay A1W9a2zKwFS m media amazon images l SSUURRRROOUUNNDD ANANYWWHHEERREE22212TM 1 Digital Wireless Surround Sender USER MANUAL 3 GEBRAUC 14 Surround Anywhere 221TM 3 2 Safety instructions Please read these instructions thoroughly before ... lang:en score:51 filesize: 1.36 M page_count: 76 document date: 2017-07-18
---	--



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

Marmitek Surround Anywhere 221 user guide Bekijk de handleiding Draadloos Audio Zender Ontvanger voor Luidsprekers bol original media s j57zyVyEvqkl |||

_0_voorkant_20609_20170718_UG_12Page 1 18-7-2017 9:38:24

SSUURRRRROOUUNNDD ANANYYYWWHHEERREE22212TM 1 ...

..... 14 **Surround Anywhere**

221TM 3 2 Safety instructions Please read these instructions thoroughly before ...

lang:en **score:50** filesize: 2.11 M page_count: 76 document date: 2022-05-07



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

Marmitek Surround Anywhere 221 user guide Digital Wireless Sender 2 Safety instructions Please read these thoroughly before you use the device and keep them for future reference Only indoor Do not product in a damp environment or near water expose to extremely high low temperatures strong light sources direct sunlight This is toy original media s-bol R66Bjr4ykMVK

SSUURRRRROOUUNNDD ANANYYYWWHHEERREE22212TM 1 Digital Wireless Surround Sender USER MANUAL 3 GEBRAUC ...

..... 14 **Surround Anywhere**

221TM 3 2 Safety instructions Please read these instructions thoroughly before ...

lang:en **score:50** filesize: 1.58 M page_count: 76 document date: 2020-03-16




[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

website lr 20609 20211220 Surround Anywhere 221 en de fr es it nl Marmitek surround Manual 48f704d824ed3bc7f2cafe0146eed8bbdd95 gzhl s at blob ldb f 1 |||

Surround Anywhere 221 3 User manual 15 Gebrauchsanleitung 27 Guide utilisateur 39 Modo de empleo 51 Manuale d istruzioni 63 Gebruiksaanwijzing 2 MARMITEK ENGLISH 1 Table of contents 1 Table of contents

..... 3 2 ...

lang:de **score:45** filesize: 2.47 M page_count: 76 document date: 2021-12-20

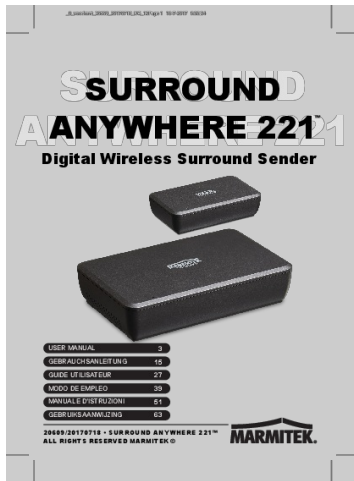

[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

Marmitek Surround Anywhere 221 user guide SURROUND ANYWHERE asset re in de 221™ 7 SH 5V adapter Powers the audio transmitter 18V receiver Speaker cableE Enables you to connect your surround set AN Klemmanschluss Funkuebertragung Set 30m 20kHz add 160267 c1 gl 001681506ML01_0_voorkant_20609_20170718_UG_12Page 1 18-7-2017 9:38:24 SSUURRRROOUUNNDD ANANYWWHHEERREE2212TM 1 ...

..... 14 **Surround Anywhere 221**TM 3 2 Safety instructions Please read these instructions thoroughly before ... lang:en **score:43** filesize: 6.36 M page_count: 76 document date: 2017-07-18



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

website Ir 20609 20210504 Surround Anywhere 221 en de fr es it nl Marmitek Usermanual 08200 SurroundAnywhere221 InstallationOperationManual Document brandportal vogels m 799709f089e7de55 original **Surround Anywhere 221** 3 User manual 15 Gebrauchsanleitung 27 Guide utilisateur 39 Modo de empleo 51 Manuale d istruzioni 63 Gebruiksaanwijzing 2 MARMITEK ENGLISH 1 Table of contents 1 Table of contents

..... 3 2 ... lang:de **score:36** filesize: 3.31 M page_count: 76 document date: 2021-05-27



[\[pdf\]](#)

25443 20170718 FCDPL SA221 indd Surround Anywhere 221™datablad 1681506 marmitek surround anywhere 221 draadloze klemaansluitingset 30 m 20 khzasset conrad media10 add 160267 c1 gl 001681506DS01 datablad khz |||

Digital Wireless Surround Sender **Surround Anywhere 221** EN Connect your surround set s existing rear speakers wirelessly; no loose cables trailing through your living room. The uncompressed digital link provides better than CD-quality sound, without interference or delay. Improved 2.4GH...

lang:de **score:35** filesize: 3.83 M page_count: 2 document date: 2017-07-20



[pdf]

25443 20170718 FCDPL SA221 indd peter Fiche technique Marmitek Surround Anywhere 221

Accessoires divers sur EasyLounge surround anywhere easylounge Produits 84e9b519 6b0b 4246 bad6 156d615f5a58 |||

Digital Wireless Surround Sender **Surround Anywhere 221**TM EN Connect your surround set s existing rear speakers wirelessly; no loose cables trailing through your living room. The uncompressed digital link provides better than CD-quality sound, without interference or delay. Improved 2.4GHz technol...

lang:de **score:32** filesize: 314.53 K page_count: 2 document date: 2017-07-20



[pdf]

Bezprzewodowy Kabel GÅoÅnikowy Marmitek Surround Anywhere 221 Cyfrowa Transmisja bez OpÅ³ÅnieÅ Bezprzewodowe PoÅÅczenie GÅoÅnika PodÅÅcz dwa GÅoÅniki Bezprzewodowo Nadajnik Audio Sklep internetowy stylem pl bezprzewodowy kabel glosnikowy marmitek surround anywhere cyfrowa transmisja opoznien bezprzewodowe polaczenie glosnika upload files product podlacz glosniki bezprzewodowo nadajnik audio 476874 |||

Bezprzewodowy Kabel Glonikowy - Marmitek **Surround Anywhere 221** - Cyfrowa Transmisja bez Opnie - Bezprzewodowe Polczenie Glonika Surround - Podlcz dwa Gloniki Bezprzewodowo - Nadajnik Audio Indeks: 476874 Producent: Marmitek Kod producenta: 08200 Cena: 719.83 zl Opis Bezprzewodowy Kabel Glonikowy - M... lang:pl **score:32** filesize: 2.02 M page_count: 3 document date: 2024-05-30



[pdf]

25443 20170718 FCDPL SA221 indd Marmitek Surround Anywhere 221 Szorítós csatlakozójú rádiójel vezérlésű készlet 30 m 20 kHz Conrad adatlap 1681506 marmitek surround anywhere szoritos csatlakozojo radiojel vezerlesu keszlet khz asset conrad media10 add 160267 c1 gl 001681506DS01 ||| Digital Wireless Surround Sender **Surround Anywhere 221**TM EN Connect your surround set s existing rear speakers wirelessly; no loose cables trailing through your living room. The uncompressed digital link provides better than CD-quality sound, without interference or delay. Improved 2.4GHz technol... lang:de **score:31** filesize: 3.83 M page_count: 2 document date: 2017-07-20




[pdf]

Leaflet Speaker Anywhere 221 indd Product leaflet Buying a Surround audio transmitter Marmitek brandportal vogels m 7cb4c30e8ca3fcac original 08200 SurroundAnywhere221 Do cument |||

Surround Anywhere 221 Audio transmitter I digital I wireless surround speakers connection EN Connect your rear speakers wirelessly - The uncompressed digital link provides better than CD-quality sound, without interference or delay. - Improved 2.4 GHz technology prevents interference with your exis...

lang:fr score:22 filesize: 1.07 M page_count: 2 document date: 2023-04-20

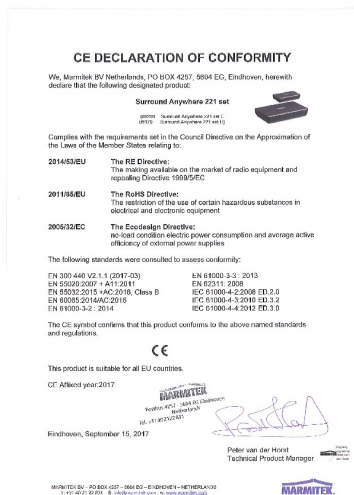


[pdf] Decleration of Conformity

website marmitek doc surround anywhere 221 media 3114

Digitally signed by Peter van der Horst ...

lang:fr score:21 filesize: 294.45 K page_count: 1 document date: 2018-01-31

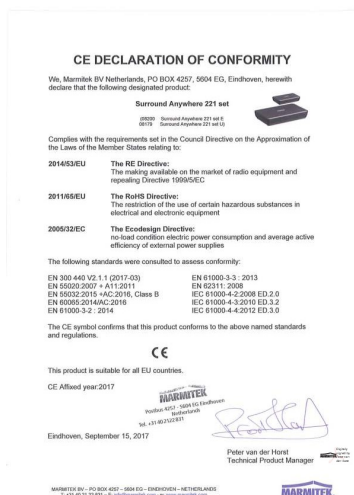

[pdf]

Untitled Bekijk de CE markering Marmitek Surround Anywhere 221 Draadloos Audio Zender Ontvanger voor Luidsprekers bol original media s Zvg8BDBKm0Bw |||

Digitally signed by Peter van der Horst ...

lang:fr score:17 filesize: 61.98 K page_count: 1 document date: 2022-05-19