

[Manuals.plus](#) /

› [NikoMaku](#) /

› NikoMaku M1 Motorcycle Bluetooth 5.2 Intercom Headset - Slim Design with Microphone User Manual

NikoMaku M1

NikoMaku M1 Motorcycle Bluetooth 5.2 Intercom Headset User Manual

Model: M1 (L1M)

1. SAFETY INFORMATION

Please read all safety information carefully before using the NikoMaku M1 Intercom Headset to ensure proper operation and prevent damage.

- **Charging Precautions:** Use only the provided USB charging cable and a 5V/1A USB charging adapter. Using chargers other than 5V/1A may prevent proper charging or damage the device.
- **Volume Settings:** Some smartphones may have features like "suppress loud sounds" or "volume limit" enabled. If you experience low call volume while riding, please disable these functions on your smartphone.
- **Operating Environment:** Do not expose the device to extreme temperatures, direct sunlight for prolonged periods, or corrosive liquids.
- **Water Resistance:** While designed for outdoor use, avoid submerging the device in water.

2. PACKAGE CONTENTS

Verify that all items are present in the package:

- NikoMaku M1 Intercom Headset Unit (with integrated microphone and speakers)
- USB Charging Cable (Micro USB)
- Mounting Velcro Pads
- User Manual

殆どのヘルメットに対応



Image 2.1: Contents of the NikoMaku M1 package, including the main unit, charging cable, mounting pads, and manual.

3. PRODUCT OVERVIEW

The NikoMaku M1 is a slim, high-performance Bluetooth intercom headset designed for motorcycle helmets, offering clear audio and convenient communication.

Key Features:

- **Ultra-Thin Speakers:** Approximately 1cm thick, 30mm diameter speakers for comfortable fit and high-quality audio with powerful bass.
- **Bluetooth 5.2:** Latest chip for stable connection, reduced audio skipping and delay, and clear call quality.

- **cVc Noise Cancelling:** 8th generation cVc technology for clear communication.
- **Dual Device Connection:** Connects to two Bluetooth devices simultaneously (e.g., smartphone and GPS).
- **Glove-Friendly Buttons:** Large operation buttons for easy volume adjustment and track control even while wearing gloves.
- **Long Battery Life:** Up to 10 hours of continuous use, 400 hours standby on a 1-hour charge.

Component Diagram:

10時間

連続音楽通話

2時間

充電時間

400時間

待機時間

超長時間待機、利用可能

一度の充電で一週間も電量を心配しない安心なイヤホン

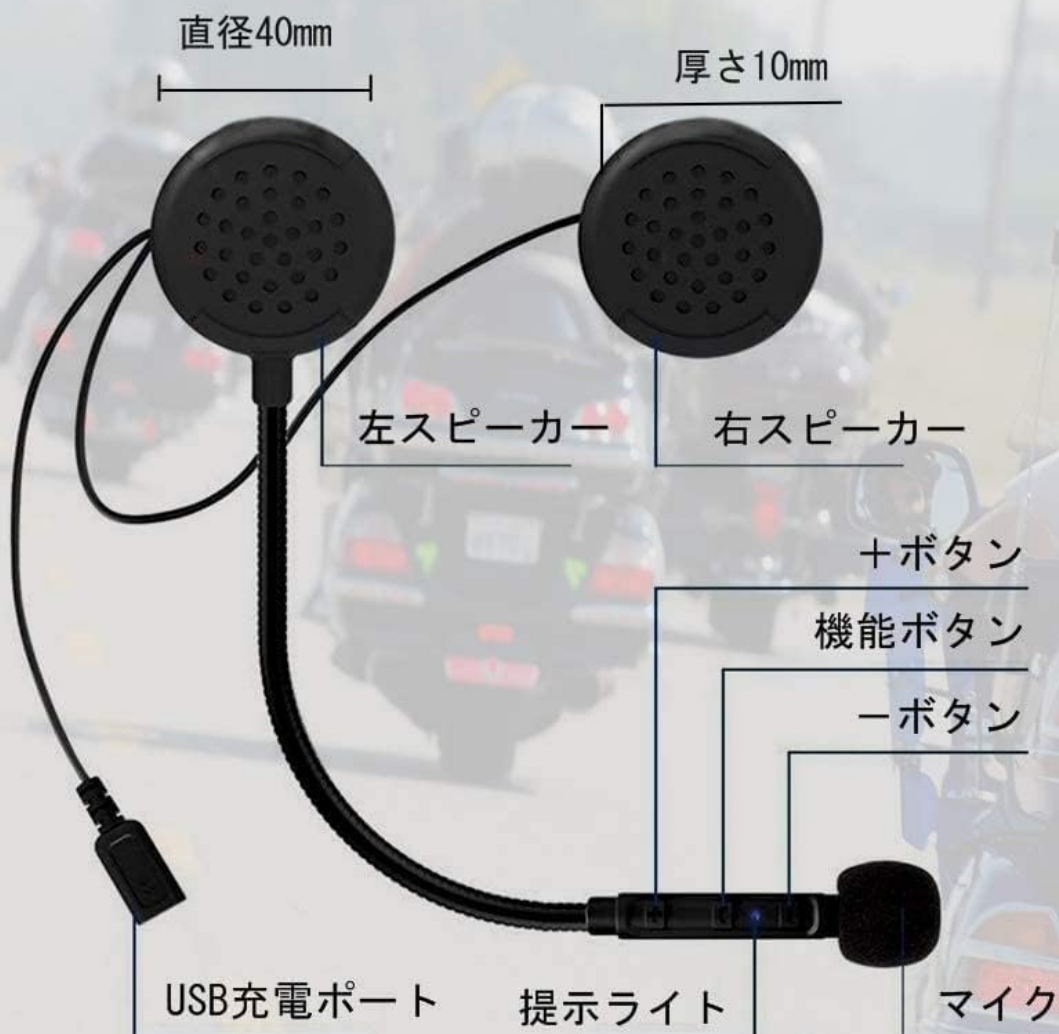


Image 3.1: Diagram showing the components of the NikoMaku M1: Left Speaker, Right Speaker, + Button, Function Button, - Button, USB Charging Port, Indicator Light, and Microphone.

4. SETUP

4.1 Installation in Helmet

1. Identify suitable locations inside your helmet for the left and right speakers. Ensure they are positioned over your ears for optimal sound.
2. Clean the helmet's inner surface where the speakers will be attached.
3. Attach the mounting Velcro pads to the back of each speaker.
4. Securely attach the speakers to the chosen locations inside your helmet.
5. Position the microphone boom so that the microphone is close to your mouth, ensuring clear voice pickup.



Image 4.1: Illustration of how the NikoMaku M1 speakers and microphone are installed inside a motorcycle helmet.

4.2 Bluetooth Pairing

1. **Power On:** Press and hold the Function Button (center button) for approximately 3 seconds until you hear a power-on prompt and the indicator light flashes.
2. **Enter Pairing Mode:** With the device powered on, press and hold the Function Button again for about 5-7 seconds until the indicator light flashes red and blue alternately, indicating it's in pairing mode.
3. **Enable Bluetooth on Your Device:** On your smartphone or other Bluetooth device, go to the Bluetooth settings and turn Bluetooth on.
4. **Select "M1" or "L1M":** In the list of available devices, select "M1" or "L1M" to connect. Once connected, the indicator light will typically show a slow blue flash, and you will hear a confirmation tone.
5. **Connect Second Device (Optional):** To connect a second device, repeat steps 2-4. The M1 supports simultaneous connection to two devices.

5. OPERATION

5.1 Power On/Off

- **Power On:** Press and hold the Function Button for approximately 3 seconds.
- **Power Off:** Press and hold the Function Button for approximately 5 seconds.

5.2 Music Playback

- **Play/Pause:** Short press the Function Button.
- **Next Track:** Short press the "+" button.
- **Previous Track:** Short press the "-" button.
- **Volume Up:** Long press the "+" button.
- **Volume Down:** Long press the "-" button.

5.3 Call Management

- **Answer Call:** Short press the Function Button when a call comes in.
- **End Call:** Short press the Function Button during a call.
- **Reject Call:** Long press the Function Button when a call comes in.
- **Redial Last Number:** Double-press the Function Button.
- **Voice Assistant (Siri/Google Assistant):** Triple-press the Function Button to activate your smartphone's voice assistant.



Image 5.1: The large, easy-to-press buttons on the NikoMaku M1, designed for operation even with gloves on.

6. CHARGING AND BATTERY

The NikoMaku M1 features a long-lasting battery for extended use.

- **Charging Port:** The device uses a Micro USB charging port.
- **Charging Time:** Approximately 1 hour for a full charge.
- **Usage Time:** Up to 10 hours of continuous music or talk time.
- **Standby Time:** Approximately 400 hours.
- **Charging Indicator:** The indicator light will typically show red during charging and turn off or change color when fully charged.

Important: Always use the provided USB charging cable and a 5V/1A USB power adapter. Using other adapters may result in improper charging or damage to the device.

7. MAINTENANCE

To ensure the longevity and optimal performance of your NikoMaku M1 Intercom Headset, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the device with a soft, dry cloth. Do not use abrasive cleaners, solvents, or harsh chemicals.
- **Storage:** When not in use for extended periods, store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Charging:** Charge the device at least once every three months if not used regularly to maintain battery health.

8. TROUBLESHOOTING

If you encounter any issues with your NikoMaku M1, please refer to the following common solutions:

Problem	Possible Cause	Solution
Device does not power on	Low battery; Incorrect charger	Charge the device using the provided USB cable and a 5V/1A adapter. Ensure the cable is properly connected.
Cannot pair with smartphone	Device not in pairing mode; Bluetooth off on phone	Ensure the M1 is in pairing mode (red/blue flashing light). Turn on Bluetooth on your phone and search for "M1" or "L1M".
Low call volume	Smartphone volume limit/suppression enabled	Check your smartphone's audio settings and disable any volume limiting or sound suppression features. Adjust volume on both the M1 and your phone.
Audio skipping or poor quality	Interference; Device too far from phone	Ensure your phone is close to you. Avoid environments with strong electromagnetic interference. Re-pair the device.

9. SPECIFICATIONS

Feature	Specification
Brand	NikoMaku
Model Number	L1M

Feature	Specification
Bluetooth Version	5.2
Noise Cancelling	cVc (8th Generation)
Speaker Diameter	30mm
Speaker Thickness	Approx. 1cm
Charging Port	Micro USB
Charging Input	5V/1A (Recommended)
Charging Time	Approx. 1 hour
Continuous Use Time	Up to 10 hours
Standby Time	Approx. 400 hours
Control Method	Buttons, Voice Control
Technical Conformity Certification	Acquired (Number: 210-123305)

© 2024 NikoMaku. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

