

MI PLM09ZM

Mi 10000mAh Li-Polymer Power Bank 2i User Manual

Model: PLM09ZM

INTRODUCTION

Thank you for choosing the Mi 10000mAh Li-Polymer Power Bank 2i. This portable power bank is designed to provide reliable and efficient charging for your mobile devices on the go. Featuring a durable metal frame and advanced safety features, it ensures a safe and fast charging experience.

SAFETY INFORMATION

- Do not disassemble, impact, or throw the product into fire or water.
- Avoid exposing the power bank to direct sunlight or high temperatures.
- Keep out of reach of children.
- Use only compatible charging cables and adapters.
- Do not short-circuit the power bank.
- Discontinue use if the power bank swells, leaks, or shows signs of damage.

PACKAGE CONTENTS

Please check the box for the following items:

- Mi 10000mAh Li-Polymer Power Bank 2i
- Micro USB Charging Cable
- User Manual (this document)

PRODUCT OVERVIEW

Familiarize yourself with the components of your Mi Power Bank 2i.

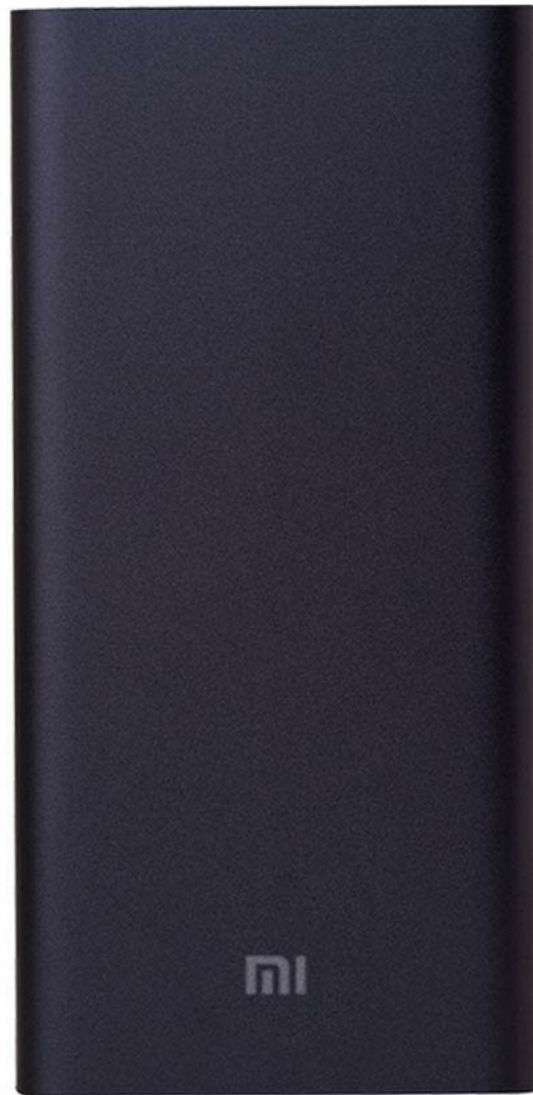


Figure 1: Front view of the Mi 10000mAh Li-Polymer Power Bank 2i.



Figure 2: Top view showing the power button, Micro USB input port, and two USB-A output ports. Four LED indicators show battery level.

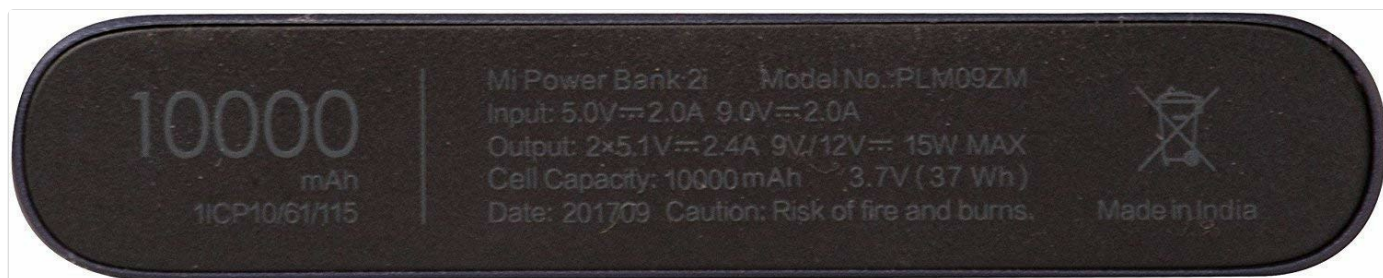


Figure 3: Bottom view displaying model number (PLM09ZM), input/output specifications, and cell capacity (10000mAh).

Key Features:

- **Lithium Polymer Battery:** High-density battery for improved safety and performance.
- **Stylish Aluminium Casing:** Durable and aesthetically pleasing metal frame.
- **Two-way Fast Charge:** Supports fast charging for both the power bank itself and connected devices.
- **Intelligent Power Output:** Automatically adjusts output based on the connected device.
- **Low Power Mode:** Designed for charging low-current devices like Bluetooth earphones and fitness bands.
- **14.2mm Thin Design:** Slim profile for easy portability.
- **9 Layers of Circuit Protection:** Comprehensive protection against overcharge, over-discharge, over-voltage, over-current, short circuit, and more.

SETUP

Charging the Power Bank:

1. Connect the included Micro USB cable to the Micro USB input port on the power bank (refer to Figure 2).
2. Connect the other end of the cable to a USB wall adapter (not included) or a computer's USB port.
3. The LED indicators will light up to show the charging progress. When all four LEDs are solid, the power bank is fully charged.

Charging Time: Approximately 4.5 hours with an 18W (9V/2A) charger, or approximately 6 hours with a 10W (5V/2A) charger.

OPERATING

Charging Your Devices:

1. Connect your device's charging cable to one of the USB-A output ports on the power bank (refer to Figure 2).
2. Connect the other end of the cable to your mobile device.
3. The power bank will automatically begin charging your device. The LED indicators will show the remaining battery level of the power bank.
4. To check the power bank's battery level, briefly press the power button.

Low Power Mode:

To charge low-current devices such as Bluetooth earphones or fitness bands, double-press the power button to activate low power mode. The LEDs will flash sequentially to indicate that low power mode is active. Double-press again to exit this mode.

MAINTENANCE

- Clean the power bank with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.

- Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures.
- If not used for extended periods, charge the power bank at least once every three months to maintain battery health.
- Avoid dropping or subjecting the power bank to strong impacts.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Power bank not charging	Cable or adapter issue; power bank faulty.	Try a different Micro USB cable and wall adapter. Ensure connections are secure.
Device not charging from power bank	Power bank battery low; incorrect cable; device not compatible.	Charge the power bank fully. Use your device's original charging cable. Ensure the power bank is not in low power mode if charging a phone/tablet.
Slow charging	Cable quality; device input limit; power bank output.	Use a high-quality charging cable. Ensure your device supports fast charging if expecting high speeds.
LEDs not lighting up	Power bank is completely discharged or faulty.	Connect the power bank to a charger for an extended period. If still unresponsive, contact support.

SPECIFICATIONS

Model Number	PLM09ZM
Battery Type	Lithium Polymer
Battery Capacity	10000 mAh
Input	5V/2A, 9V/2A (Max 18W)
Output	Dual USB-A: 5.1V/2.4A, 9V/2A, 12V/1.5A (Max 18W)
Dimensions	14.7 x 7.1 x 1.4 cm
Weight	240 g
Color	Black
Protection Features	9 layers of circuit protection (Overcharge, Over-discharge, Over-voltage, Over-current, Short circuit, etc.)

WARRANTY AND SUPPORT

Your Mi 10000mAh Li-Polymer Power Bank 2i comes with **a6-month domestic warranty** from the date of purchase. For any queries, technical support, or warranty claims, please contact Mi customer service:

- **Customer Service Hotline:** 18001036286
- Please have your product model number (PLM09ZM) and proof of purchase ready when contacting support.



