

[Manuals.plus](#) /

› [Siljoy](#) /

› Siljoy Modern Crystal Chandelier (Model HLC037) Instruction Manual

Siljoy HLC037

Siljoy Modern Crystal Chandelier (Model HLC037) Instruction Manual

Rectangular Flush Mount Ceiling Light Fixture

1. INTRODUCTION

Thank you for choosing the Siljoy Modern Crystal Chandelier, Model HLC037. This rectangular flush mount ceiling light fixture features 10 lights and K9 crystal raindrops, designed to enhance various indoor spaces such as dining rooms, living rooms, and kitchen islands. Please read this manual thoroughly before installation and use to ensure proper function and safety.



Image 1.1: The Siljoy Modern Crystal Chandelier (Model HLC037) installed, showcasing its design and illumination.

2. SAFETY INFORMATION

- **Electrical Safety:** Always turn off the main power supply at the circuit breaker before beginning any installation, maintenance, or cleaning.
- **Qualified Electrician:** If you are not experienced with electrical installations, it is recommended to consult a qualified electrician.
- **Mounting Surface:** Ensure the mounting surface can support the weight of the fixture (approximately 27.5 pounds).
- **Wiring:** Connect wiring according to local electrical codes. Ensure all wire connections are secure.
- **Bulb Type:** Use only E12 bulbs (not included) with a maximum compatible wattage of 40 watts per bulb.
- **Handling Crystals:** Handle crystal components with care to prevent breakage. Wearing gloves is recommended to avoid fingerprints.
- **Indoor Use Only:** This fixture is designed for indoor use only.

3. PACKAGE CONTENTS

Carefully unpack the box and ensure all components are present and undamaged. Keep all packaging materials until you are satisfied with the product.

- Chandelier Base (Polished Chrome Canopy)
- K9 Crystal Raindrops (various shapes and sizes)
- Mounting Hardware (screws, wire connectors, etc.)
- Installation Gloves (recommended for handling crystals)
- Instruction Manual
- *Note: E12 light bulbs are not included and must be purchased separately.*

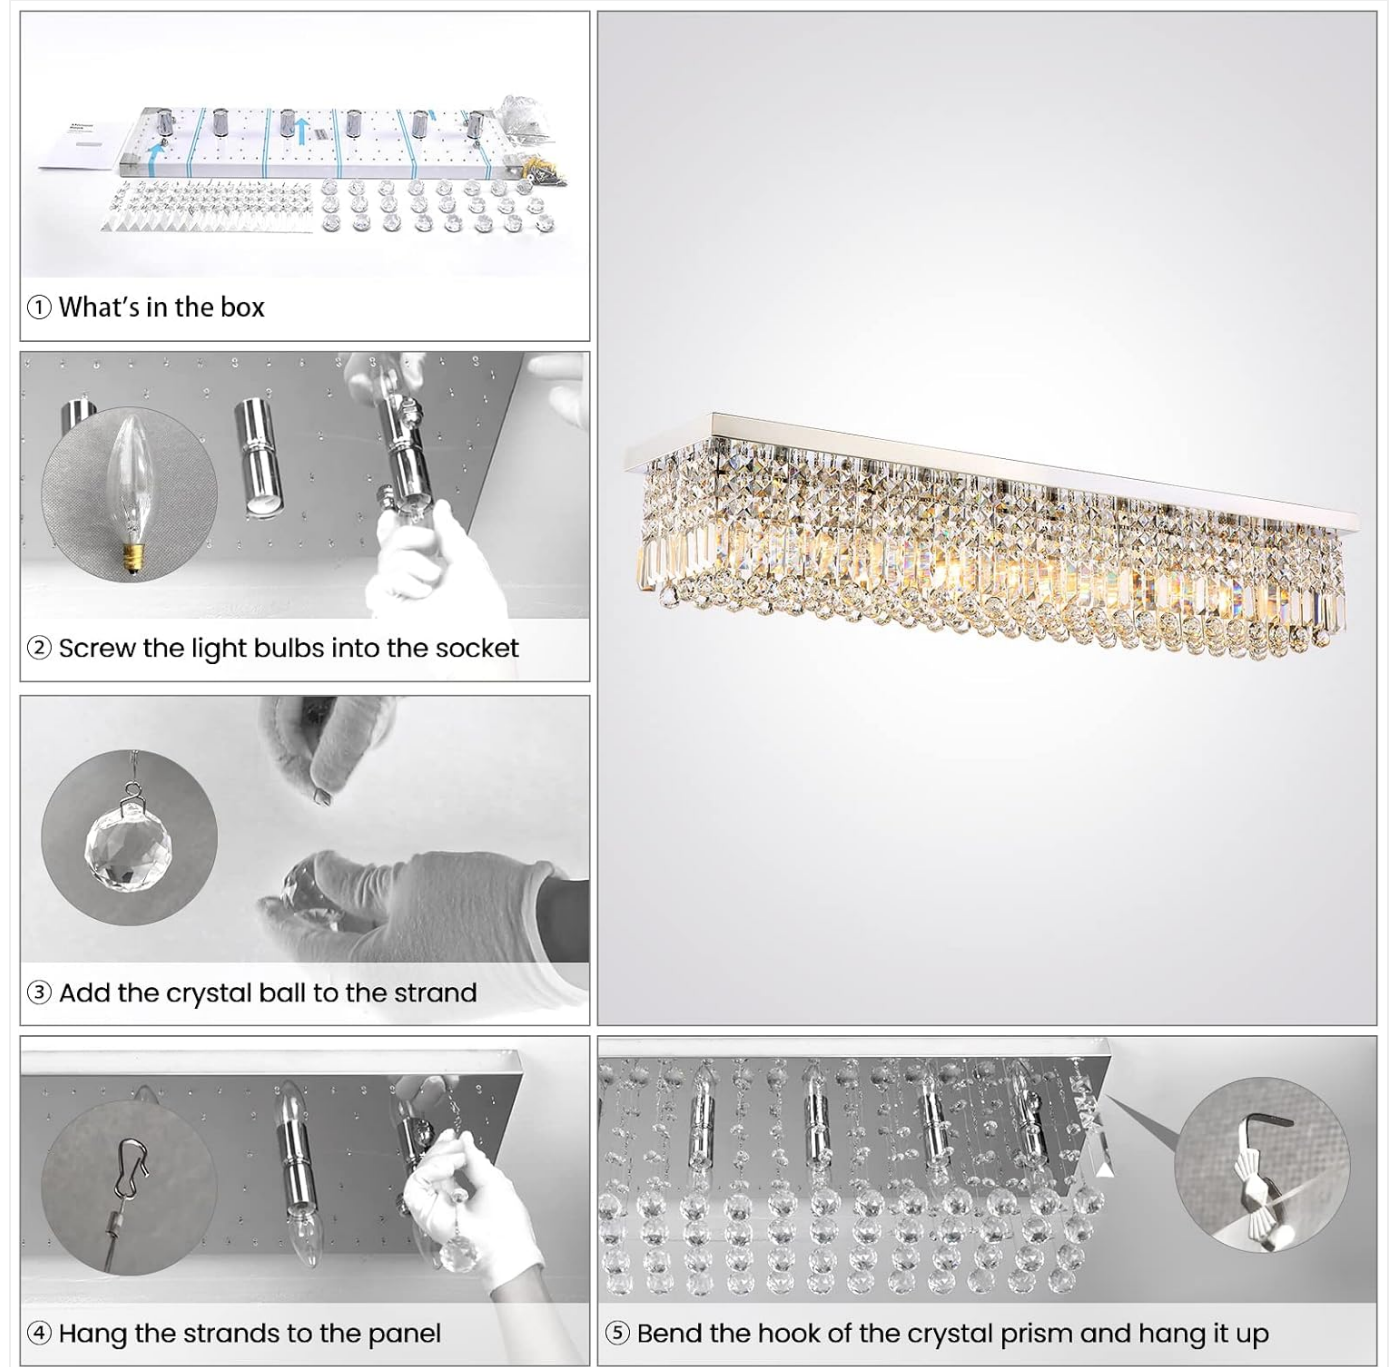


Image 3.1: Overview of included components and assembly steps.

4. PRODUCT SPECIFICATIONS

Brand:	Siljoy
Model Name:	HLC037
Product Dimensions (L x W x H):	47" x 10" x 10" (120cm x 25cm x 25cm)
Item Weight:	27.5 Pounds
Material:	K9 Crystal, Metal (Chrome Finish)
Light Source Type:	Incandescent (E12 Bulb Base)
Number of Light Sources:	10
Maximum Compatible Wattage:	40 Watts per bulb (Total 400W)
Voltage:	220 Volts
Installation Type:	Flush Mount
Special Feature:	Dimmable (with compatible bulbs and dimmer switch)
Room Type:	Dining Room, Living Room, Kitchen Island, Bedroom, Hallway, Conference Room, etc.

Dimension



E14 LED BULBS (MAX 40W)

This rectangular chandelier is compatible with various types of E14 bulbs



Image 4.1: Detailed dimensions of the chandelier.

Product Details

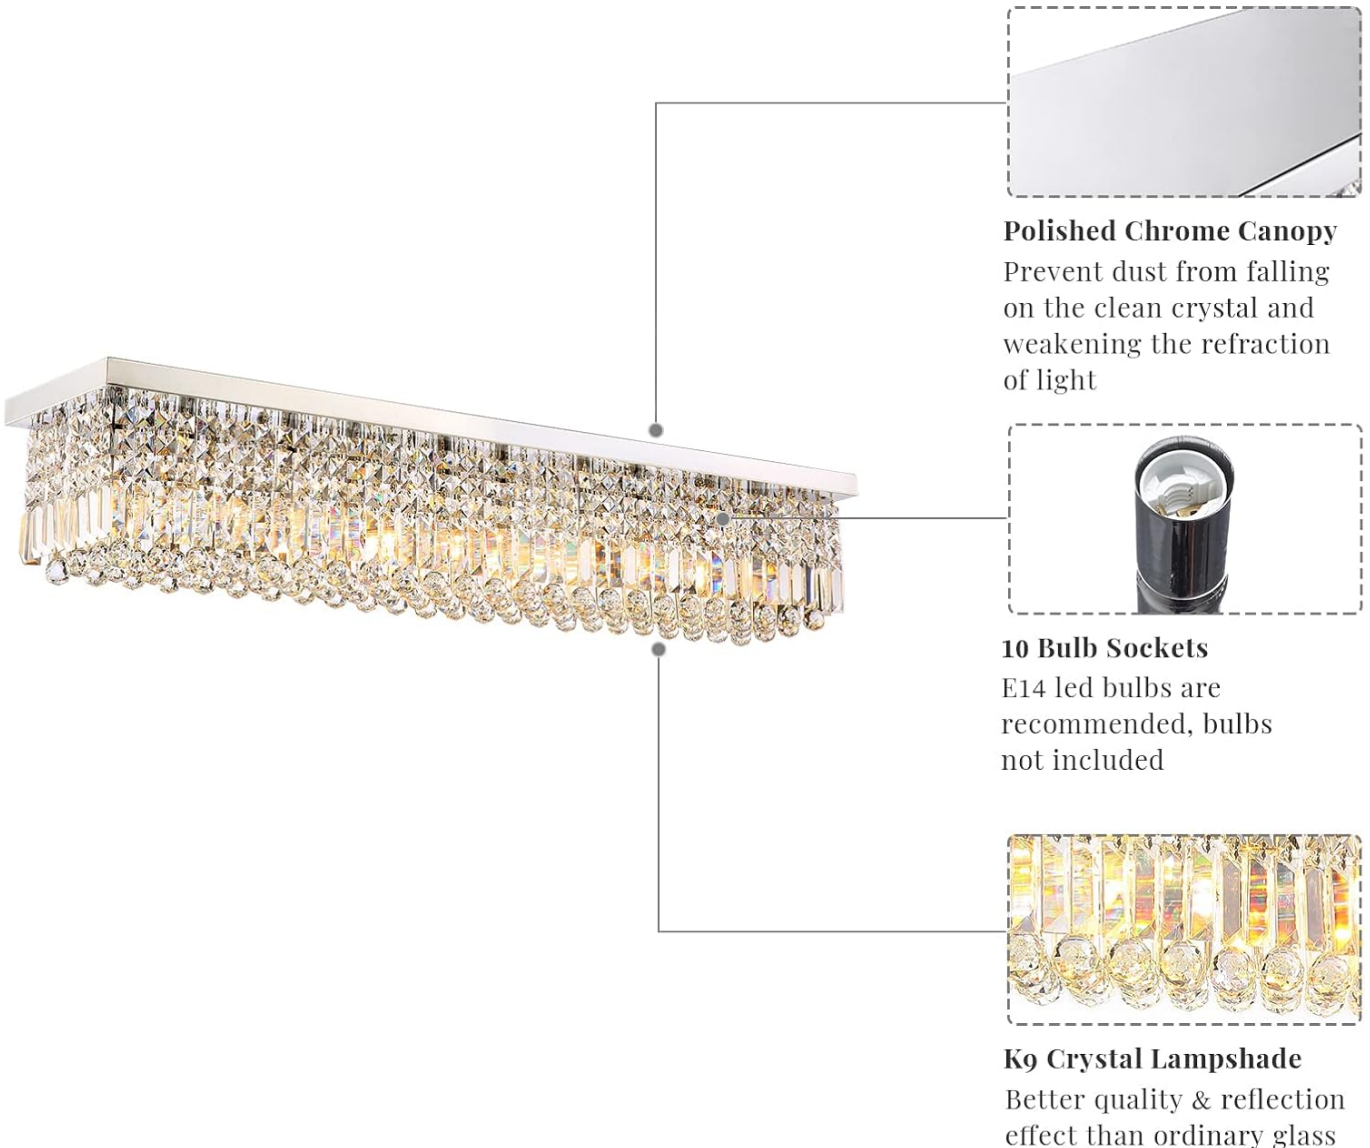


Image 4.2: Product details highlighting the polished chrome canopy, bulb sockets, and K9 crystal quality.

5. INSTALLATION INSTRUCTIONS

Installation requires careful attention to detail. It is recommended to have assistance due to the size and weight of the fixture. Please refer to Image 3.1 for visual guidance.

1. Preparation:

- Turn off power at the circuit breaker.
- Ensure the junction box and ceiling can support the fixture's weight.
- Unpack all components and lay them out on a clean, soft surface.
- Wear the provided gloves when handling crystal components to prevent fingerprints.

2. Mounting the Fixture Base:

- Attach the mounting bracket to the ceiling junction box using the provided screws. Ensure it is securely fastened.
- Connect the electrical wires (live, neutral, ground) from the ceiling to the corresponding wires on the fixture base. Use appropriate wire connectors.
- Carefully lift the chandelier base and secure it to the mounting bracket.

3. Installing Light Bulbs:

- Screw 10 E12 bulbs (not included) into the bulb sockets on the fixture base. Do not overtighten.

4. Attaching Crystal Components:

- The crystal raindrops are typically pre-assembled into strands.
- Carefully attach each crystal strand to the designated hooks or holes on the chandelier base. Work from the center outwards to maintain balance.
- Ensure each crystal connection is secure. Extra crystals and wire fittings are often provided.
- Bend the hooks of the crystal prisms slightly if needed to secure them properly.

5. Final Check:

- Verify all connections are tight and secure.
- Ensure all crystal components are properly hung.

6. Restore Power:

Turn the main power supply back on at the circuit breaker.

Your browser does not support the video tag.

Video 5.1: A demonstration of the Siljoy Rectangular Raindrop Crystal Chandelier in various settings, highlighting its aesthetic appeal and light patterns. This video is provided by the manufacturer, Siljoy Lighting.

6. OPERATING INSTRUCTIONS

- **Turning On/Off:** Operate the chandelier using a standard wall switch connected to the fixture.
- **Dimming Function:** If you have installed dimmable E12 bulbs and a compatible dimmer switch (not included), you can adjust the light intensity to create your desired ambiance.



Image 6.1: Visual comparison of the chandelier with lights on and off.

7. MAINTENANCE

• Cleaning:

- Ensure the power is off before cleaning.
- Use a soft, dry microfiber cloth to gently wipe the chrome canopy and crystal components.
- Avoid using abrasive cleaners or chemicals, as they may damage the finish or crystals.
- For stubborn spots on crystals, a slightly damp cloth with water can be used, followed by immediate drying.

• Bulb Replacement:

- Turn off power before replacing bulbs.
- Allow bulbs to cool completely before touching them.
- Replace with E12 bulbs, ensuring the wattage does not exceed 40 watts per bulb.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	- Power is off at the circuit breaker. - Loose wire connections. - Faulty bulb(s). - Faulty wall switch.	- Check and reset the circuit breaker. - Ensure all wire connections are secure (power off first). - Replace bulb(s) with new ones. - Test the wall switch; replace if necessary.
Lights flicker.	- Loose bulb(s). - Incompatible dimmer switch or bulbs. - Loose wire connections.	- Tighten bulbs. - Ensure dimmable bulbs are used with a compatible dimmer. - Check wire connections (power off first).
Crystals appear dull or dirty.	Dust or fingerprints on crystals.	Clean crystals as per maintenance instructions.

9. WARRANTY AND SUPPORT

The Siljoy Modern Crystal Chandelier is covered by a manufacturer's warranty. For specific warranty details, please refer to the documentation included with your purchase or contact Siljoy customer support.

If you encounter any problems with your Siljoy Modern Crystal Chandelier or require assistance, please do not hesitate to contact Siljoy customer support. Contact information can typically be found on the product packaging or the official Siljoy website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question