

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [STANLEY](#) /

> [Stanley Fatmax 1000 Peak Amp Power Station with 4 USB Ports, Jump-Starter, 120 PSI Air Compressor, Black, Lithium Ion Battery User Manual](#)

## STANLEY PP1DCS

# Stanley Fatmax 1000 Peak Amp Power Station User Manual

Model: PP1DCS | Brand: STANLEY

## INTRODUCTION AND OVERVIEW

The Stanley Fatmax 1000 Peak Amp Power Station is a versatile portable power solution designed for automotive and personal electronic needs. It integrates a powerful jump-starter, a 120 PSI air compressor, and four USB ports for charging various devices. Its robust, low-profile, anti-roll design ensures stability and durability, making it suitable for use in diverse environments, from roadside emergencies to outdoor activities.

This manual provides essential information for the safe and effective operation, maintenance, and troubleshooting of your power station.



Front view of the Stanley Fatmax 1000 Peak Amp Power Station, showcasing its digital display, USB ports, and jump-starter clamps.

## SAFETY INFORMATION

Always read and understand all safety warnings and instructions before operating this product. Failure to follow these instructions may result in electric shock, fire, and/or serious injury.

- Keep the unit away from moisture, rain, and snow.
- Do not operate the unit if it has received a sharp blow, been dropped, or otherwise damaged.
- Ensure proper ventilation during operation and charging.
- Wear eye protection when working with batteries.
- Keep out of reach of children.

- Do not use for purposes other than those described in this manual.

## PRODUCT FEATURES

---

- **1000 Peak Amp Jump-Starter:** Provides instant starting power for vehicles with dead batteries.
- **120 PSI Air Compressor:** Equipped with a built-in hose for inflating vehicle tires, bicycle tires, and sports equipment.
- **4 USB Ports:** Allows simultaneous charging of multiple personal electronic devices such as laptops, tablets, and smartphones.
- **Digital Display:** Provides clear readings for battery status, air pressure, and other operational information.
- **LED Work Light:** Integrated for illumination in low-light conditions.
- **Internal Lithium-Ion Battery:** Provides long-lasting portable power.
- **Low-Profile, Anti-Roll Design:** Enhances stability and ease of transport.

## SETUP

---

1. **Initial Charge:** Before first use, fully charge the power station for at least 40 hours. Connect the unit to a standard household outlet using the provided AC charging adapter. The digital display will indicate charging progress.
2. **Familiarize Yourself with Controls:** Locate the digital display, USB ports, compressor controls, LED light button, battery status button, alternator check button, and the jump-starter clamps.
3. **Store Accessories:** Ensure all accessories, such as the air compressor hose and adapters, are properly stored in their designated compartments to prevent damage or loss.

## OPERATING INSTRUCTIONS

---

### Jump-Starting a Vehicle

1. Ensure the power station is fully charged.
2. Turn off the vehicle's ignition and all accessories.
3. Connect the RED (positive +) clamp to the positive terminal of the vehicle's battery.
4. Connect the BLACK (negative -) clamp to a non-moving metal part of the vehicle's chassis, away from the battery and fuel lines.
5. Ensure connections are secure.
6. Attempt to start the vehicle. If it doesn't start immediately, wait a few minutes before trying again. Do not crank for more than 5 seconds per attempt.
7. Once the vehicle starts, disconnect the BLACK (negative -) clamp first, then the RED (positive +) clamp.

### Using the Air Compressor

1. Remove the air compressor hose from its storage compartment.
2. Screw the hose connector onto the tire valve stem or attach the appropriate adapter for sports equipment.
3. Use the digital display and control buttons to set the desired PSI.
4. Press the COMPRESSOR button to begin inflation. The compressor will automatically stop once the preset pressure is reached.
5. Disconnect the hose and store it properly.

## USB Device Charging

1. Connect your USB device's charging cable to one of the four USB ports on the power station.
2. Press the USB POWER ON/OFF button to activate the USB ports.
3. Monitor your device's charging status.
4. Press the USB POWER ON/OFF button again to turn off the USB ports when charging is complete or when not in use to conserve battery life.

## MAINTENANCE

---

- **Recharging:** Recharge the unit after each use. If not used, recharge every 30 days for approximately 40 hours to maintain optimal battery health.
- **Cleaning:** Clean the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Storage:** Store the power station in a cool, dry place, away from direct sunlight and extreme temperatures.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Unit does not turn on.	Battery is fully discharged.	Recharge the unit for at least 40 hours.
Vehicle does not jump-start.	Incorrect clamp connection; vehicle battery too dead.	Check clamp connections for proper polarity and secure contact. Ensure unit is fully charged.
Air compressor not inflating.	Hose not securely attached; unit not powered on.	Ensure hose is tightly screwed onto valve stem. Press COMPRESSOR button.
USB ports not charging.	USB power not activated; unit battery low.	Press USB POWER ON/OFF button. Recharge the unit.

## SPECIFICATIONS

---

- **Brand:** STANLEY
- **Model Number:** PP1DCS
- **Peak Output Current:** 1000 Amps
- **Air Compressor:** 120 PSI
- **USB Ports:** 4 (6.2A total output)
- **Item Weight:** 13 pounds
- **Product Dimensions:** 6 x 13 x 12 inches
- **UPC:** 814632012757

## WARRANTY AND SUPPORT

---

For warranty information or technical support, please refer to the official STANLEY website or contact their customer service department. Keep your purchase receipt as proof of purchase for warranty claims.

Visit the [STANLEY Store](#) for more products and information.

## Related Documents - PP1DCS


	<p><a href="#">Stanley Fatmax 350 Amp Battery Jump-Starter with Compressor - Instruction Manual</a></p> <p>Comprehensive instruction manual for the Stanley Fatmax 350 Amp Battery Jump-Starter with 120 PSI Compressor. Learn about features, safety guidelines, operation, charging, maintenance, and troubleshooting.</p>
	<p><a href="#">Stanley FatMax PP1DCS Professional Digital Power Station Instruction Manual</a></p> <p>Comprehensive instruction manual for the Stanley FatMax PP1DCS Professional Digital Power Station, covering features, safety guidelines, operation, charging, jump starting, air compression, USB power, and maintenance.</p>
	<p><a href="#">STANLEY Portable Power Station Instruction Manual</a></p> <p>Comprehensive instruction manual for the STANLEY Portable Power Station (Model J5CPD), covering features, safety guidelines, jump-starting, AC power, USB charging, air compressor, and warranty information.</p>
	<p><a href="#">Stanley Fatmax J7CS 350 Amp Jump Starter with Compressor: Instruction Manual</a></p> <p>This official instruction manual for the Stanley Fatmax J7CS 350 Amp Battery Jump-Starter with Compressor provides detailed guidance on safe usage, features, operation, charging, maintenance, and troubleshooting for automotive and general use.</p>
	<p><a href="#">Stanley FatMax J45TK Jump Starter &amp; Air Compressor Quick Start Guide</a></p> <p>Concise quick start guide for the Stanley FatMax J45TK 450 Instant / 900 PEAK Battery Amp Jump Starter with Air Compressor, covering jump starting, air compression, and recharging procedures.</p>
	<p><a href="#">Stanley SS4LS Lithium Jump-Starter / Power Bank Instruction Manual</a></p> <p>This manual provides instructions for the Stanley SS4LS Lithium Jump-Starter / Power Bank, including safety guidelines, operating instructions, charging procedures, troubleshooting, and specifications. It covers how to jump-start a vehicle, charge the unit, and use the USB ports and LED light.</p>



[\[pdf\]](#) User Manual Instructions

ManualsLib Makes it easy to find manuals online! Search through 700 000 online and instruction user service guides owners installation Provided By MANUALSLIB COM manualslib Open in new tab Stanley FatMax PP1DCS Instruction Manual ManualsDock manualsdock 2023 02 |||


**PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL  
FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN 32  
**PP1DCS\_ManualENSP\_072116.indd 32-1** SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2016 Baccus Global LLC Boca Raton, FL 33432 ...  
lang:en score:50 filesize: 1.34 M page\_count: 16 document date: 2023-02-23

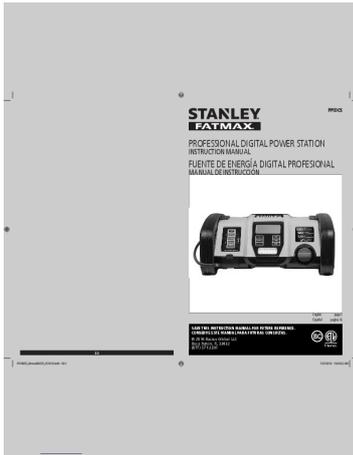

[\[pdf\]](#) User Manual Instructions

Provided by ManualsAndMore Download User Manual Stanley FatMax PP1DCS Instruction manualsandmore |||


**PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL  
FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN 32  
**PP1DCS\_ManualENSP\_072116.indd 32-1** SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2016 Baccus Global LLC Boca Raton, FL 33432 ...  
lang:en score:45 filesize: 1.35 M page\_count: 16 document date: 2019-07-24

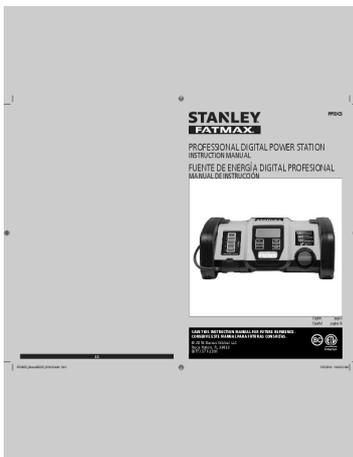

[\[pdf\]](#) User Manual Instructions Troubleshooting Guide

Stanley Fatmax PP1DCS 1000 Peak Amp Power Station User Manual Explore the for essential setup features and troubleshooting tips your power needs station peak manuals instruction user service guides owners installation ManualsLibraryy Guidig You Through Every Step with Online Manuals manualslibraryy 2024 10 |||


**PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL  
FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN 32  
**PP1DCS\_ManualENSP\_072116.indd 32-1** SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2016 Baccus Global LLC Boca Raton, FL 33432 ...  
lang:en score:44 filesize: 381.36 K page\_count: 16 document date: 2024-10-27

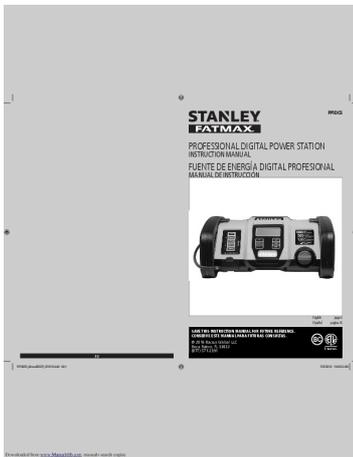

### [Stanley FatMax PP1DCS Professional Digital Power Station Instruction Manual](#)

Comprehensive instruction manual for the Stanley FatMax PP1DCS Professional Digital Power Station, covering features, safety guidelines, operation, charging, jump starting, air compression, USB power, and maintenance.


lang:en score:38 filesize: 1.35 M page\_count: 16 document date: 2019-06-10



### [\[pdf\] User Manual Instructions](#)

professional digital power station instruction manual Read and understand all warnings operating instructions before using any tool or equipment READ ALL INSTRUCTIONS WARNING this 0814632012757 scene7 samsclub is content 21 hours ago — this This device complies with part 15 of the FCC rules Operation subject to following two conditions 1 may not cause harmful interference ||| 20 **PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2021 Baccus Global LLC Boca Raton, FL 33487 1-877-571-2391 1 English page 5 ...

lang:es score:29 filesize: 1.65 M page\_count: 20 document date: 2021-11-22

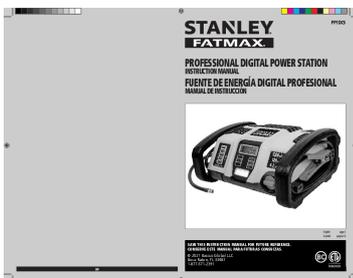


### [\[pdf\] User Manual](#)

PP1DCS MANUALS stanley12volt ManualENSP 040721 files ugd 217982

e0629792e6c846a297c73d4c62408e32 |||

**PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN 20 **PP1DCS**\_ManualENSP\_040721.indd 20-1 SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2021 Baccus Global LLC Boca Raton, FL 33487 ...

lang:es score:28 filesize: 1.82 M page\_count: 10 document date: 2021-04-07



### [\[pdf\] User Manual Instructions Accessories](#)

PROFESSIONAL DIGITAL POWER STATION could be hazardous Refer to the accessory section of this manual for further details Stay alert Use common sense Do not operate equipment when you are tired or impaired Check damaged parts Any part that is should be replaced by manufacturer before use tool if switch does turn it on and off 726720 owners scene7 samsclub content Untitled

32 **PP1DCS** PROFESSIONAL DIGITAL POWER STATION INSTRUCTION MANUAL FUENTE DE ENERGA DIGITAL PROFESIONAL MANUAL DE INSTRUCCIN SAVE THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE. CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS. 2018 Baccus Global LLC Boca Raton, FL 33432 877 571-2391 1 English page 3 ...

lang:en score:11 filesize: 1.65 M page\_count: 30 document date: 2018-11-26

