

[Manuals.plus](#) /

› [Honeywell Ceiling Fans](#) /

› Honeywell Belmar 52 Inch Ceiling Fan with Light (Model 50513-01) Instruction Manual

Honeywell Ceiling Fans 50513-01

Honeywell Belmar 52 Inch Ceiling Fan with Light (Model 50513-01) Instruction Manual

Model: 50513-01 | Brand: Honeywell Ceiling Fans

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Honeywell Belmar 52 Inch Ceiling Fan with Light, Model 50513-01. This damp-rated ceiling fan is designed for both indoor and covered outdoor use, offering efficient air circulation and integrated LED lighting.

Key features include a 52-inch blade span, a 5-blade design, pull chain control for fan speed and light, and a reversible motor for year-round comfort. Please read all instructions carefully before beginning installation.



Figure 1.1: The Honeywell Belmar 52 Inch Ceiling Fan with Light in White finish.

2. SAFETY INFORMATION

Important Safety Instructions:

- Always disconnect power at the circuit breaker or fuse box before installation or servicing.
- Ensure all electrical connections comply with local codes and ordinances. If you are unfamiliar with electrical wiring, consult a qualified electrician.
- The fan is ETL listed, indicating compliance with safety standards.
- This product is damp-rated, suitable for covered outdoor areas such as patios and pergolas, but not for direct exposure to water.
- The fan must be mounted with a minimum of 7 feet (2.1 meters) clearance from the floor to the blade trailing edge.
- **Proposition 65 Warning:** This product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

3. PACKAGE CONTENTS

Verify that all components listed below are included in your package before beginning installation:

- Motor Assembly
- Fan Blades (5)
- Light Kit
- LED Bulbs (2)
- Hardware Pack (screws, washers, wire nuts, etc.)
- Downrod (4-inch)

4. INSTALLATION AND SETUP

Installation typically takes 45-60 minutes. Ensure you have the necessary tools, including a screwdriver, wire strippers, and a ladder.

4.1 Mounting Options

The Honeywell Belmar fan offers three mounting options to suit various ceiling types:

- **Standard Mount:** Utilizes the included 4-inch downrod for standard ceiling heights.
- **Closemount:** For low-profile or flush-mount installations, mimicking a flush appearance.
- **Angled Mount:** For vaulted or angled ceilings, requiring a longer downrod (sold separately).

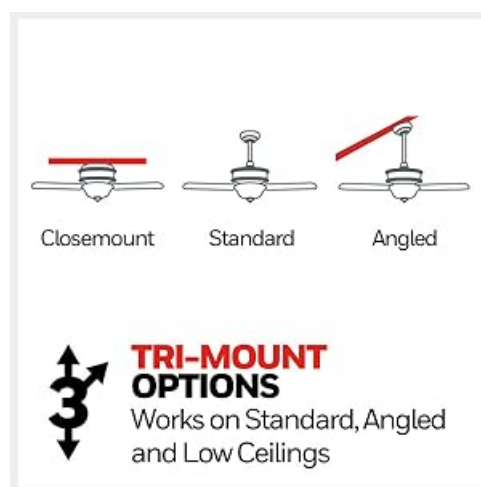


Figure 4.1: Illustration of the three Tri-Mount installation options.

4.2 General Installation Steps (Summary)

1. Securely attach the mounting bracket to the ceiling junction box.
2. Assemble the fan motor and downrod (if using standard or angled mount).
3. Hang the fan assembly onto the mounting bracket.
4. Complete electrical wiring connections.
5. Attach the fan blades to the motor housing.
6. Install the light kit and LED bulbs.
7. Restore power and test the fan and light functions.



Figure 4.2: The fan is designed for straightforward installation, typically completed within 45-60 minutes.

5. OPERATING INSTRUCTIONS

The Honeywell Belmar ceiling fan is controlled using two pull chains.

5.1 Fan Speed Control

One pull chain controls the fan speed. Pull the chain repeatedly to cycle through the three available speeds (High, Medium, Low) and to turn the fan off.

5.2 Light Control

The second pull chain operates the integrated LED light kit. Pull the chain to turn the light on or off. The light kit includes two E26/A15 LED bulbs, providing 1200 lumens with a 3000K color temperature.



Figure 5.1: The fan and light are controlled by separate pull chains.

5.3 Reversible Motor Function

The fan features a 3-speed reversible motor for year-round comfort. A switch on the fan housing allows you to change the direction of blade rotation:

- **Summer Mode:** Downward airflow creates a cooling effect.

- **Winter Mode:** Upward airflow circulates warm air trapped near the ceiling, helping to reduce heating costs.



Figure 5.2: The reversible motor enhances comfort in all seasons.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

6.1 Cleaning

To clean the fan, wipe surfaces with a damp cloth. Do not use abrasive cleaners or solvents, as these can damage the finish or electrical components. Ensure power is disconnected before cleaning.

6.2 Blade Care

The fan blades are constructed from high-quality, all-weather resistant material designed to withstand outdoor elements without bending or warping. Periodically check blade screws for tightness.



Figure 6.1: The durable blades are designed for all-weather use.

7. TROUBLESHOOTING

If you experience issues with your ceiling fan, consult the following common troubleshooting tips. For complex problems, contact customer support or a qualified electrician.

- **Fan does not start:** Check power supply at the circuit breaker. Ensure all wire connections are secure. Verify the pull chain is engaged.
- **Light does not work:** Check the light pull chain. Ensure bulbs are correctly installed and not burnt out. Verify wire connections to the light kit.
- **Fan wobbles:** Ensure all blade screws are tightened. Check that the mounting bracket is securely fastened to the ceiling. Use the included balancing kit if necessary.

- **Noisy operation:** Confirm all screws are tight. Check for any loose parts or obstructions.

8. SPECIFICATIONS

Feature	Detail
Model Name	Belmar
Model Number	50513-01
Brand	Honeywell Ceiling Fans
Color	White
Product Dimensions	52"D x 52"W x 13.07"H
Diameter	52 Inches
Number of Blades	5
Air Flow Capacity	5070 Cubic Feet Per Minute
Speed Settings	3 RPM (High, Medium, Low)
Wattage	56.4 watts
Voltage	120 Volts (AC)
Switch Type	Pull Chain
Light Kit	Integrated LED, 1200 lumens, 3000K color temperature
Indoor/Outdoor Usage	Indoor, Outdoor (Damp Rated)
Special Feature	Water Resistant, Reversible Motor
Certification	ETL Listed
Item Weight	14.52 pounds
UPC	671961505134

Honeywell

PRODUCT DIMENSIONS

4 inch downrod included with purchase



Figure 8.1: Key dimensions of the Honeywell Belmar 52 Inch Ceiling Fan.

9. WARRANTY AND SUPPORT

This Honeywell Belmar ceiling fan comes with a **Limited Lifetime Manufacturer Warranty**. For warranty claims, technical support, or replacement parts, please contact Honeywell Ceiling Fans customer service. Refer to the official Honeywell website or your purchase documentation for contact details.

For additional information and support, you may visit the [Honeywell Ceiling Fans Store](#).

