

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [VIZIO](#) /

› [VIZIO SB362An-F6 36-inch 2.1 Channel Soundbar with Built-in Dual Subwoofers User Manual](#)

### VIZIO SB362An-F6

# VIZIO SB362An-F6 36-inch 2.1 Channel Soundbar with Built-in Dual Subwoofers User Manual

Model: SB362An-F6 | Brand: VIZIO

## INTRODUCTION

This manual provides essential information for the safe and efficient operation of your VIZIO SB362An-F6 36-inch 2.1 Channel Soundbar with Built-in Dual Subwoofers. Please read these instructions thoroughly before use and retain them for future reference.



*Figure 1: Front view of the VIZIO SB362An-F6 Soundbar.*

## WHAT'S IN THE Box

Verify that all components are present in the packaging:

- VIZIO SB362An-F6 36-inch 2.1 Channel Soundbar
- Remote Control (requires 2 AAA batteries, not included)
- Power Cord
- Optical Cable
- 3.5mm to 3.5mm Audio Cable (Auxiliary Cable)
- USB Cable
- Wall Mounting Brackets (2)
- Mounting Guide



Figure 2: Top view of the soundbar with integrated controls.

## SETUP

### Placement Options

The soundbar can be placed in two orientations: laid flat or upright. This allows for sound projection either upward or forward, depending on your preference and room acoustics.

- **Flat Placement:** Position the soundbar horizontally on a flat surface, such as a TV stand or shelf, directly below your television.
- **Upright Placement:** The soundbar can also be positioned vertically. Ensure stability in this orientation.
- **Wall Mounting:** Utilize the included brackets and mounting guide to securely attach the soundbar to a wall.



Figure 3: Side view of the soundbar, highlighting its trapezoid contour.

### Connecting the Soundbar

1. **Power Connection:** Connect the power cord to the soundbar's power input and then to a wall outlet.
2. **Audio Connection (Choose One):**
  - **Optical Cable:** For optimal digital audio quality, connect one end of the optical cable to the soundbar's OPTICAL input and the other end to your TV's OPTICAL OUT port.
  - **Auxiliary Cable:** Connect one end of the 3.5mm audio cable to the soundbar's AUX input and the other end to your TV's 3.5mm audio output or headphone jack.
  - **USB Cable:** Connect the USB cable to the soundbar's USB port and to a compatible USB audio source.
3. **Bluetooth Pairing:** To stream audio wirelessly from a mobile device, activate Bluetooth on your device and select the VIZIO soundbar from the list of available devices. Refer to your device's manual for specific pairing instructions.

## OPERATING INSTRUCTIONS

The soundbar features intuitive controls for an enhanced audio experience.

### Remote Control Functions

Use the included remote control to access all soundbar functions. Ensure batteries are correctly installed.

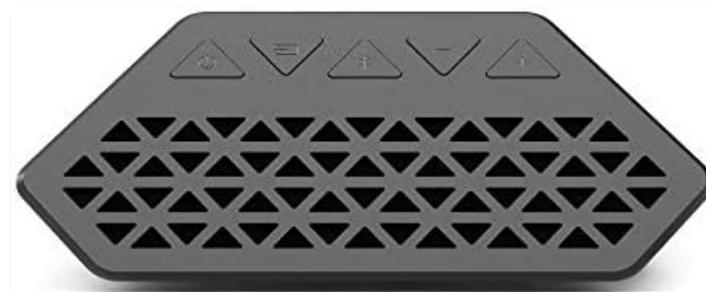


Figure 4: VIZIO Soundbar remote control.

- **Power:** Turns the soundbar on or off.
- **Input:** Cycles through available audio inputs (Optical, Aux, USB, Bluetooth).
- **Volume (+/-):** Adjusts the master volume level.
- **Mute:** Mutes or unmutes the audio.
- **EQ Modes:** Switch between preset equalizer modes (e.g., Music, Movie) to optimize audio for different content types.
- **Bass/Treble:** Adjust bass and treble levels to customize your sound.
- **Bluetooth Pairing:** Initiates Bluetooth pairing mode.

## Integrated Controls

Basic controls are also available on the soundbar itself, typically located on the top or side panel.

- **Power Button:** Turns the soundbar on or off.
- **Input Button:** Cycles through audio inputs.
- **Volume Buttons:** Adjusts the master volume.



*Figure 5: Internal view highlighting the integrated dual subwoofers for enhanced bass.*

## MAINTENANCE

To ensure the longevity and optimal performance of your soundbar, follow these simple maintenance guidelines:

- **Cleaning:** Gently wipe the soundbar's surface with a soft, dry cloth. Avoid using liquid cleaners or abrasive materials, as they may damage the finish.
- **Ventilation:** Ensure that the soundbar's vents are not obstructed to prevent overheating.
- **Storage:** If storing the soundbar for an extended period, disconnect it from power and store it in a cool, dry place.

## TROUBLESHOOTING

If you encounter issues with your VIZIO soundbar, refer to the following common solutions:

| Problem  | Solution  |
|----------|---|
| No Power | Ensure the power cord is securely connected to both the soundbar and a working electrical outlet. |

| Problem                 | Solution   |
|-------------------------|--|
| No Sound                | Verify the correct input source is selected on the soundbar. Check all audio cable connections (Optical, Aux, USB). Ensure the soundbar and TV are not muted and volume is up. |
| Bluetooth Disconnection | Ensure your Bluetooth device is within range (approx. 30 feet) and not connected to another device. Try re-pairing the device.   |
| Poor Sound Quality      | Adjust EQ modes, bass, and treble settings. Ensure audio cables are not damaged. For optical connections, check the cable for kinks or damage.                                 |

## SPECIFICATIONS

---

- **Model Name:** Vizio 36" 2.1-Channel Sound Bar
- **Model Number:** SB362AN-F6
- **Speaker Type:** Soundbar, Subwoofer (Built-in Dual Subwoofers)
- **Surround Sound Channel Configuration:** 2.1
- **Speaker Maximum Output Power:** 150 Watts
- **Connectivity Technology:** Auxiliary, Optical, USB, Bluetooth, Wi-Fi
- **Control Method:** Remote
- **Item Weight:** 7.5 Pounds
- **Material:** Metal, Plastic
- **Mounting Type:** Wall Mount
- **UPC:** 845226016653

## WARRANTY AND SUPPORT

---

Your VIZIO SB362An-F6 Soundbar comes with a **One-Year Warranty** from the date of purchase. For detailed warranty information, technical support, or service inquiries, please refer to the official VIZIO support channels or visit their website.

## PRODUCT OVERVIEW VIDEO

---

Your browser does not support the video tag.

*This video provides a general overview of the VIZIO Soundbar. Please refer to the official product specifications in this manual for exact features and connectivity options of the SB362An-F6 model.*